

WINE CABINET & BEVERAGE CENTRE

PLANNING GUIDE

INTEGRATED WINE CABINET - RS6009V2RT1 | RS6009V2R1

INTEGRATED BEVERAGE CENTRE - RS6009SBLT1 | RS6009SBL1

FISHER & PAYKEL

This comprehensive Planning Guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONTENTS

| CONCEPT DESIGN | PAGE | DEVELOPED AND DETAILED DESIGN | PAGE | DEVELOPED AND DETAILED DESIGN | PAGE |
|--------------------------------|------|--|------|-------------------------------|------|
| Design Choices | | Data Sheets | | Handle Data Sheets | |
| Wine Cabinet & Beverage Centre | 4 | Wine Cabinet + Stainless Steel Door | 12 | Professional Handle | 26 |
| | | Wine Cabinet + Custom Door Panel | 13 | Fine Aluminium Handle | 27 |
| Specification Guide | | Beverage Centre + Stainless Steel Door | 14 | Fine Round Handle | 28 |
| Integrated Wine Cabinet | 6 | Beverage Centre + Custom Door Panel | 15 | Classic Handle | 29 |
| Integrated Beverage Centre | 8 | | | | |
| Multiple Installation | 10 | Design Information Planning | | | |
| | | Hinge Articulation | 17 | | |
| | | Door Opening Clearance | 18 | | |
| | | Custom Panel Preparation – Solid | 20 | | |
| | | Custom Panel Preparation – Window | 21 | | |
| | | Custom Panel Door Panel Options | 22 | | |
| | | Services | | | |
| | | Power and water connections | 24 | | |

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.

designsupport@fisherpaykel.com

DESIGN CHOICES

SPECIFICATION GUIDE



RS6009V2R1 – Solid door with Custom Panel



RS6009V2RT1 – Glass door with Custom Panel



RS6009SBL1 & RS6009V2R1 Side by Side

OVERVIEW

Designed for wine lovers, this under-counter wine cabinet seamlessly fits in any space of the evolving home. Boasting premium oak slide-out shelves and a UV-tempered glass door, it elegantly showcases up to 35 bottles. Featuring dual temperature zones and specialised modes for Red, White, Sparkling, and Cellar wines, this versatile cabinet provides the perfect environment for all wine varieties.

PRODUCTS

RS6009V2RT1 Integrated Wine Cabinet
Glass Door, Panel Ready or Stainless Steel Panel, Right Hinge
(All models can achieve opposite hinge location using the supplied parts)

RS6009V2R1 Integrated Wine Cabinet
Solid Door, Panel Ready or Stainless Steel Panel, Right Hinge
(All models can achieve opposite hinge location using the supplied parts)

FEATURES


- ① Integrates into any setting within the home, from the bar to the master suite – the choices are endless
- ② Four specialised wine modes for Red, White, Sparkling, and Cellar wines
- ③ Designed to fit flush, with 4mm gaps and no visible hinges or grilles
- ④ Premium oak slide-out shelves for convenient access and storage
- ⑤ Accommodates up to 35 bottles, providing ample space for a diverse collection
- ⑥ Features two independent temperature zones to cater for different wine varieties
- ⑦ UV-tempered glass door elegantly displays and protects wine
- ⑧ Intuitive interface for easy temperature control and mode selection
- ⑨ Internal LED lighting provides beautiful illumination, showcasing the collection
- ⑩ Wi-Fi enabled for remote temperature control from the SmartHQ™ app

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

SPECIFICATIONS

| | |
|--------------------|-----------------------------|
| Model No. | RS6009V2RT1, RS6009V2R1 |
| Product Dimensions | H 864-900mm W 592mm D 579mm |
| Electrical | |
| Supply | 220-240 V, 50 Hz |
| Service | 10 A |


PRODUCT DIMENSIONS

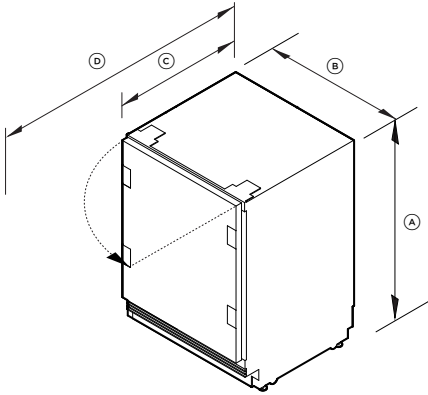

| | mm |
|---|-----------|
| Ⓐ Overall height | 864 - 900 |
| Ⓑ Overall width | 592 |
| Ⓒ Overall depth* | 579 |
| Ⓓ Overall depth with the door open* | 1200 |
| Height from floor to bottom of door panel** | 15 - 150 |
| Depth of toe kick (excl. front door and toe kick panels)** | 50 - 100 |
| Splitline heights achievable (height from floor to top of door panel) | 861 - 897 |

Maximum custom door panel thickness of 19mm
*Excluding door panel and handle
**Applies to custom door panels
*** The grille becomes visible at heights over 100mm

CAVITY DIMENSIONS: STANDARD INSTALLATION

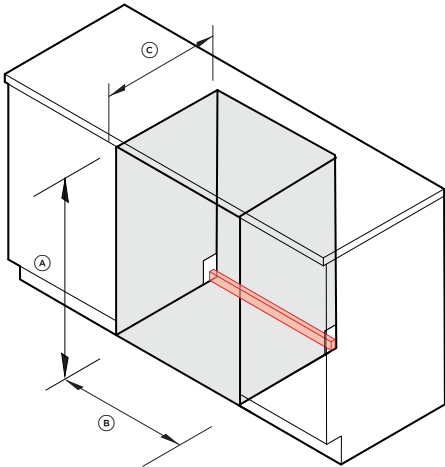

| | mm |
|---|-----------|
| Ⓐ Height | 864 - 900 |
| Ⓑ Minimum width | 600 |
| Ⓒ Minimum overall cavity depth with service to the side | 600 |
| Ⓓ Minimum overall cavity depth with service behind | 650 |
| Service area | |
| H37mm x W600mm x D20mm | |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com



RS6009SBL1 – Solid door with Custom Panel



RS6009SBLT1 – Glass door with Custom Panel



RS6009SBL1 & RS6009V2R1 Side by Side

OVERVIEW

Experience the luxury of the Integrated Beverage Centre. Seamlessly blending into any home setting, its adjustable shelves and full-depth wine shelf elegantly house your favourite beverages. With a UV-resistant glass door and soft LED lighting, this Beverage Centre is a blend of style and functionality, offering optimal conditions for all drinks.

PRODUCTS

RS6009SBLT1 Integrated Beverage Centre
Glass Door, Panel Ready or Stainless Steel Panel, Left Hinge
(All models can achieve opposite hinge location using the supplied parts)

RS6009SBL1 Integrated Beverage Centre
Solid Door, Panel Ready or Stainless Steel Panel, Left Hinge
(All models can achieve opposite hinge location using the supplied parts)

FEATURES


- ① Integrates into any setting within the home, from the bar to the master suite – the choices are endless
- ② Designed to fit flush, with 4mm gaps and no visible hinges or grilles
- ③ Adjustable temperature control helps to keep drinks at the ideal temperature
- ④ Customisable beverage shelf with adjustable gates ensures contents remain upright and neatly organised
- ⑤ Spacious 129L capacity, with full-depth wine shelf that can accommodate up to seven bottles
- ⑥ Wi-Fi enabled for remote temperature control from the SmartHQ™ app
- ⑦ Internal LED lighting provides beautiful illumination, showcasing the collection
- ⑧ UV-tempered glass door elegantly displays and protects beverages
- ⑨ Intuitive interface for easy temperature control and mode selection

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

SPECIFICATIONS

| | |
|--------------------|-----------------------------|
| Model No. | RS6009SBLT1, RS6009SBL1 |
| Product Dimensions | H 864-900mm W 592mm D 579mm |
| Electrical | |
| Supply | 220-240 V, 50 Hz |
| Service | 10 A |


PRODUCT DIMENSIONS

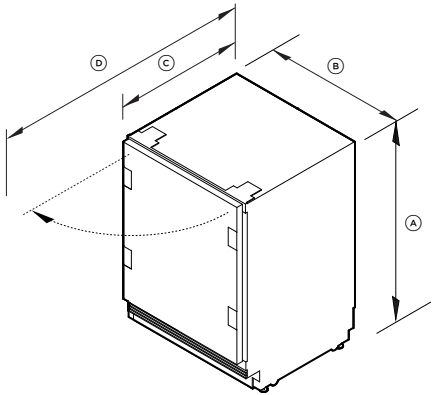

| | mm |
|---|---------|
| A Overall height | 864-900 |
| B Overall width | 592 |
| C Overall depth* | 579 |
| D Overall depth with the door open* | 1200 |
| Height from floor to bottom of door panel** *** | 15-150 |
| Depth of toe kick (excl. front door and toe kick panels)** | 50-100 |
| Splitline heights achievable (height from floor to top of door panel) | 861-897 |

Maximum custom door panel thickness of 19mm
*Excluding door panel and handle
**Applies to custom door panels
*** The grille becomes visible at heights over 100mm

CAVITY DIMENSIONS: STANDARD INSTALLATION

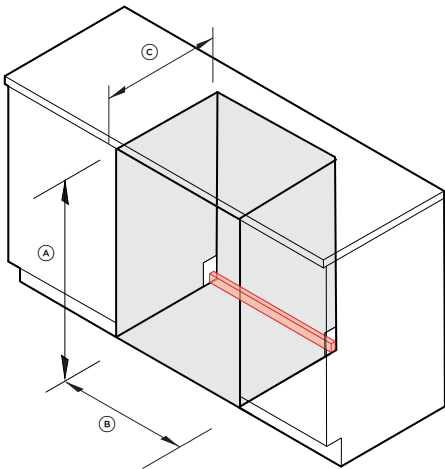


| | mm |
|---|---------|
| A Height | 864-900 |
| B Minimum width | 600 |
| C Minimum overall cavity depth with service to the side | 600 |
| D Minimum overall cavity depth with service behind | 650 |
| Service area | |
| H37mm x W600mm x D20mm | |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

SPECIFICATIONS

| | |
|--------------------|--|
| Model No. | RS6009V2RT1, RS6009V2R1, RS6009SBLT1, RS6009SBL1 |
| Product Dimensions | H 864-900mm W 592mm D 579mm |
| Electrical | |
| Supply | 220-240 V, 50 Hz |
| Service | 10 A |


PRODUCT DIMENSIONS

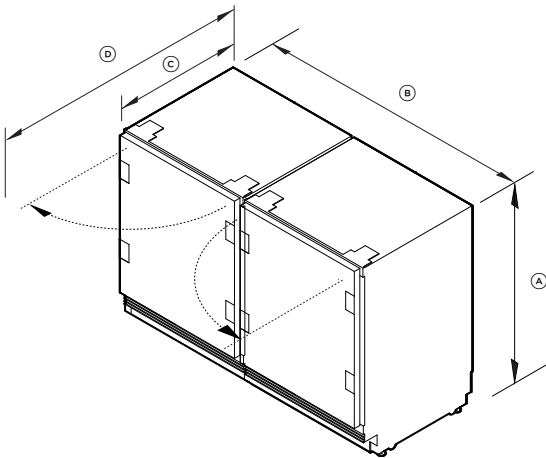

| | mm |
|---|-----------|
| Ⓐ Overall height | 864 - 900 |
| Ⓑ Overall width - dual installation | 1190 |
| Ⓒ Overall depth* | 579 |
| Ⓓ Overall depth with the door open* | 1200 |
| Height from floor to bottom of door panel** *** | 15-150 |
| Depth of toe kick (excl. front door and toe kick panels)** | 50 - 100 |
| Splitline heights achievable (height from floor to top of door panel) | 861 - 897 |

Maximum custom door panel thickness of 19mm
*Excluding door panel and handle
**Applies to custom door panels
***The grille becomes visible at heights over 100mm


CAVITY DIMENSIONS: STANDARD INSTALLATION

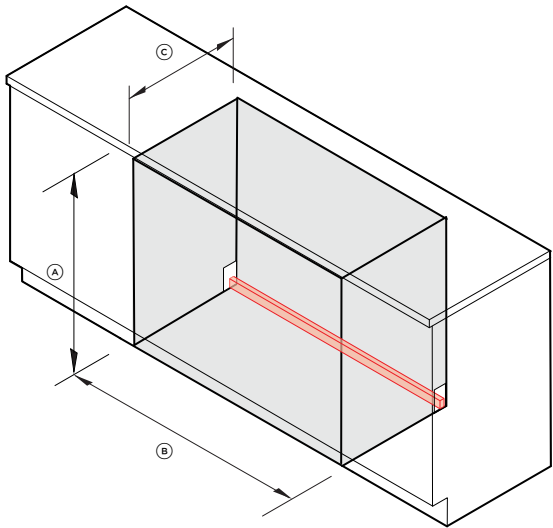

| | mm |
|--|--------------|
| Ⓐ Height | 864 - 900 |
| Ⓑ Minimum width dual installation Minimum width triple installation | 1200 1800 |
| Ⓒ Minimum overall cavity depth with service to the side | 600 |
| Ⓓ Minimum overall cavity depth with service behind | 650 |
| Service area dual installation H 37mm x W 1200mm x D 20mm Service area triple installation H 37mm x W 1800mm x D 20mm | |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

DATA SHEETS

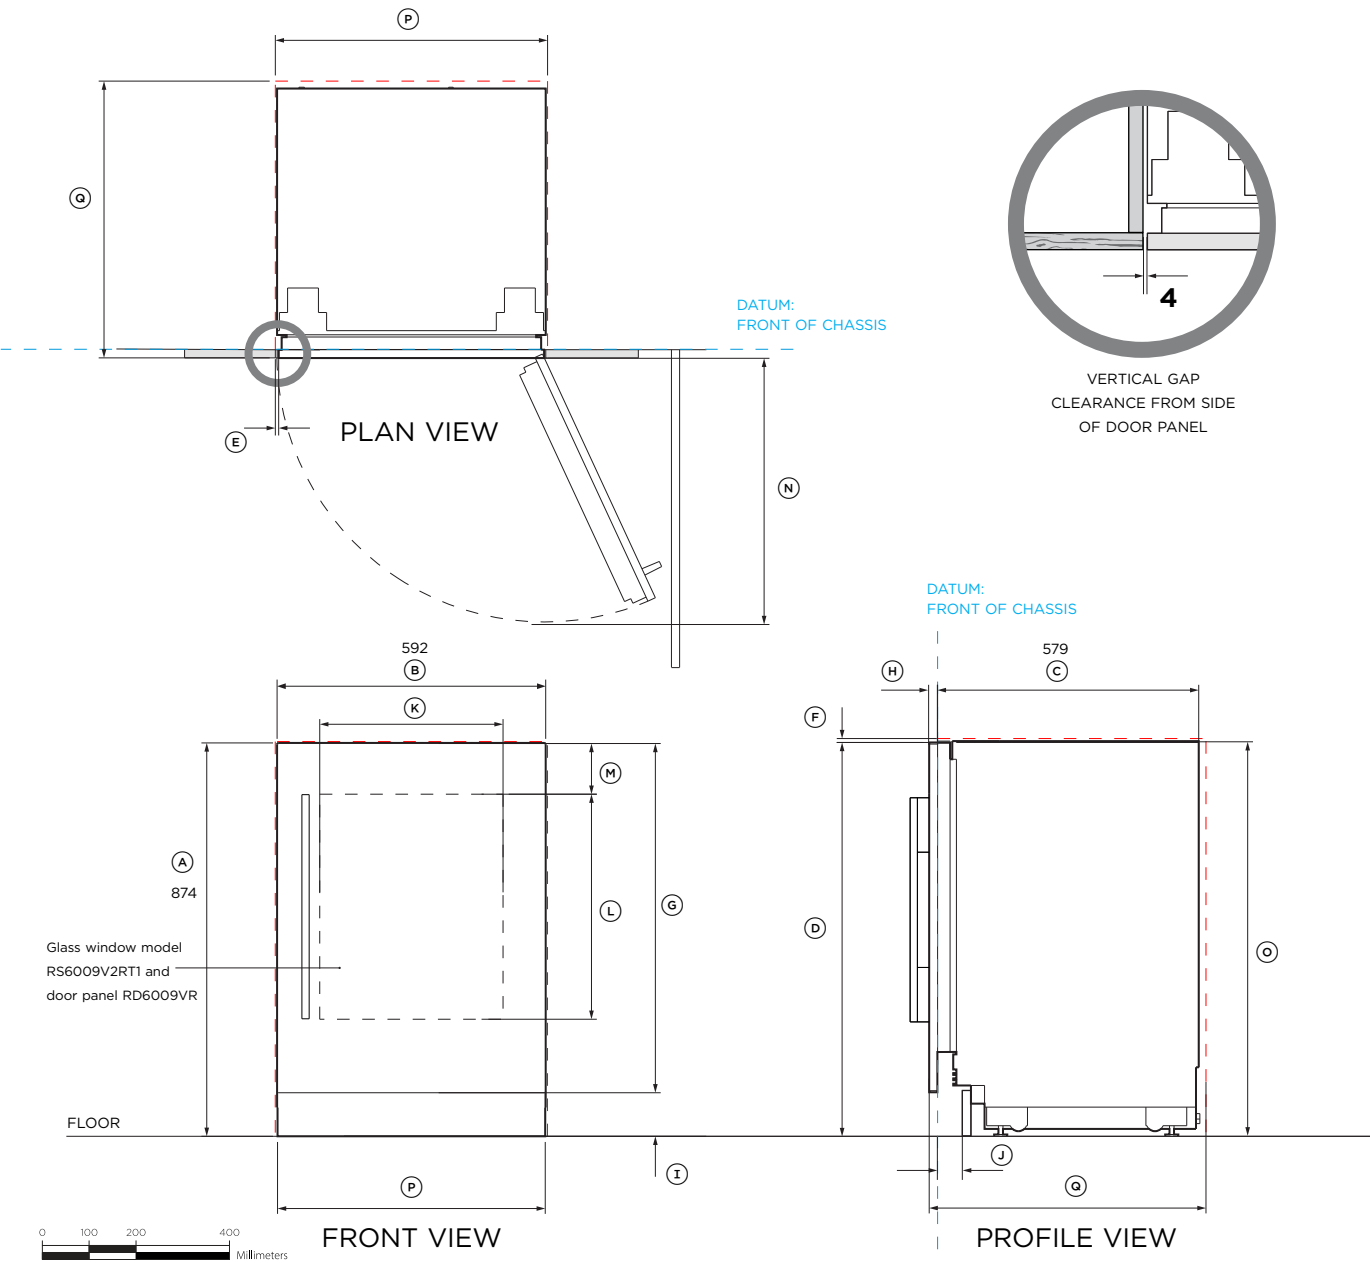

PRODUCT & CAVITY DIMENSIONS
Integrated Wine Cabinets with Stainless Steel Door Panels

Model No:
RS6009V2RT1 – Right hinge, Glass window
RS6009V2R1 – Right hinge, Solid door

Shown with
Stainless Steel Panel with Glass RD6009VR – RS6009V2RT1
Stainless Steel Panel Solid RD2435R – RS6009V2R1

Handle Kit AHD5RD09(B)
Stainless Steel Toe Kick Panel AKRS06010

Note: All models can achieve opposite hinge location using the supplied parts.

| Product Dimensions | mm |
|--|--------|
| A Overall height of product | 874 |
| B Overall width of product | 592 |
| C Overall depth of product (excl. front door panels) | 579 |
| D Height from top of door panel to floor | 871 |
| E Minimum cabinetry clearance from side of door panel | 4 |
| F Minimum cabinetry clearance from top of door panel | 3 |
| G Height of door panel | 771 |
| H Depth of door panel | 19 |
| I Height from floor to bottom door panel | 100 |
| J Depth of toe kick (excl. front door and toe kick panels) | 50-100 |
| K Width of glass window | 404 |
| L Height of glass window | 496 |
| M Top of door panel to top of cut-out/window | 113 |
| N Depth of door (90° open, measured from front of cabinetry) | 600 |


| Cavity Dimensions | mm |
|--|-----|
| O Overall height of cavity | 874 |
| P Overall width of cavity | 600 |
| Q Minimum overall depth of cavity: | |
| When services are located outside of cavity (shallow)* | 600 |
| When services are located in the neighbouring cavities | 610 |
| When services are located at rear of cavity (deep) | 650 |

*Multiple product installation cavity depth is 610mm, this to allow space for the joiner kit bracket

Notes:
Product shown installed on the floor. Slide into cabinetry position.
Alternatively can be installed on a plinth. Adjust your cavity height accordingly.

INDICATES PRODUCT DATUM -----
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

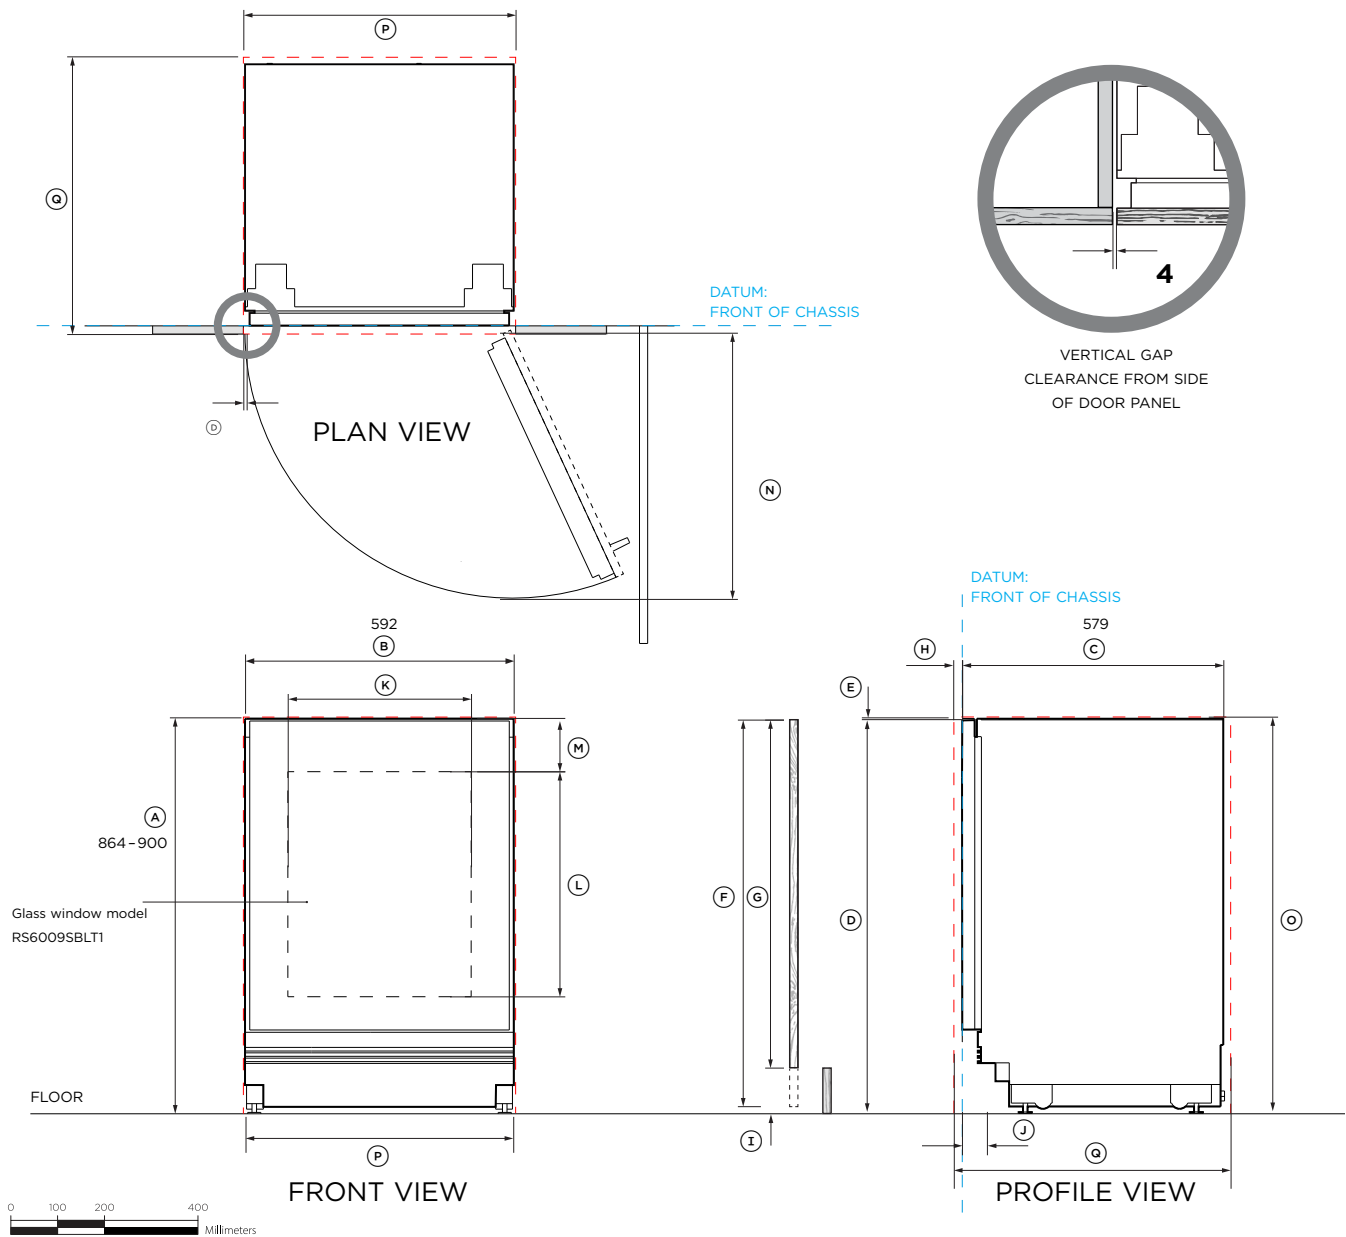

PRODUCT & CAVITY DIMENSIONS
Integrated Wine Cabinets with Custom Door Panels

Model No:
RS6009V2RT1 - Right hinge
RS6009V2R1 - Right hinge

Note: All models can achieve opposite hinge location using the supplied parts.


| Product Dimensions | mm |
|--|-----------|
| A Overall height of product | 864 - 900 |
| B Overall width of product | 592 |
| C Overall depth of product (excl. front door panels) | 579 |
| D Minimum cabinetry clearance from side of door panel | 4 |
| E Minimum cabinetry clearance from top of door panel | 3 |
| F Maximum height of custom door panel | 882 |
| G Minimum height of custom door panel | 761 |
| H Depth of custom door panel | 16 - 19 |
| I Height from floor to bottom of door panel | 15 - 150 |
| J Depth of toe kick (excl. front door and toe kick panels) | 50 - 100 |
| K Width of glass window | 404 |
| L Height of glass window | 496 |
| M Top edge of glass to top of custom door panel | 113 |
| N Depth of door (90° open, measured from front of cabinetry) | 600 |

| Cavity Dimensions | mm |
|---|-----------|
| O Overall height of cavity | 864 - 900 |
| P Overall width of cavity | 600 |
| Q Minimum overall depth of cavity: | |
| When services are located outside of cavity (shallow)* | 600 |
| When services are located in the cabinet above the cavity | 610 |
| When services are located at rear of cavity (deep) | 650 |

*Multiple product installation cavity depth is 610mm, this to allow space for the joiner kit bracket

INDICATES PRODUCT DATUM -----
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

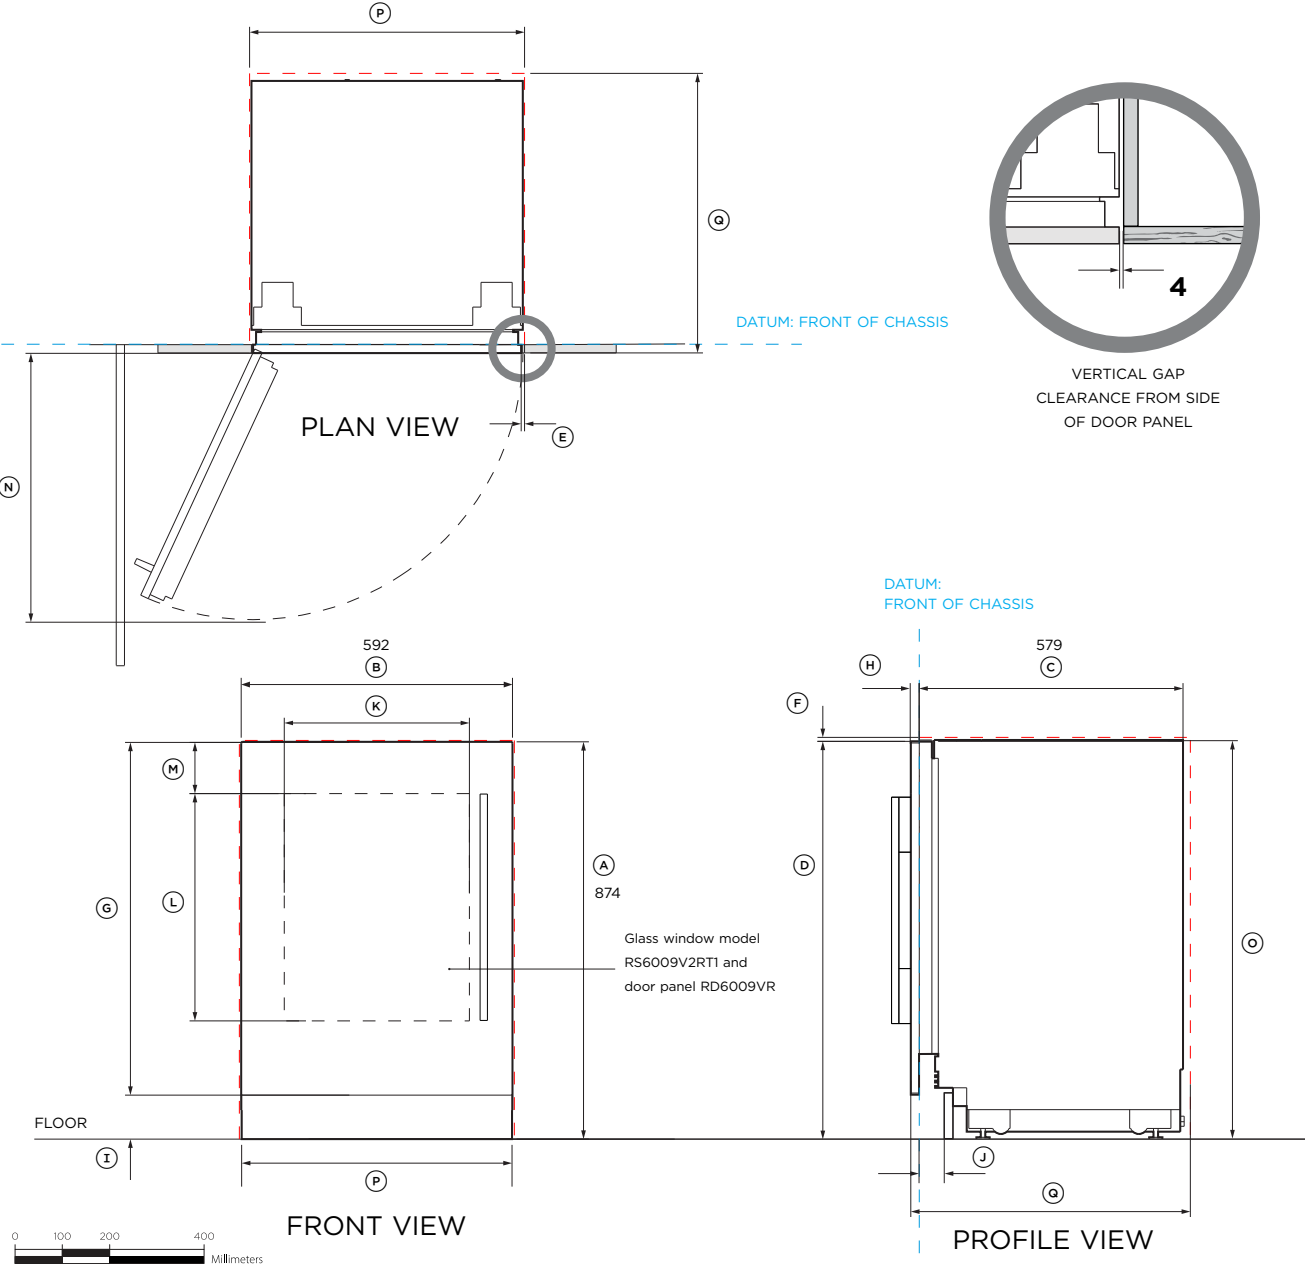

PRODUCT & CAVITY DIMENSIONS
Integrated Beverage Centres with Stainless Steel Door Panels

Model No:
RS6009BLT1 - Right hinge, Glass window
RS6009BL1 - Right hinge, Solid door

Shown with
Stainless Steel Panel with Glass RD6009VR - RS6009B2LT1
Stainless Steel Panel Solid RD6009R - RS6009B2L1

Handle Kit AHD5RD09(B)
Stainless Steel Toe Kick Panel AKRS6009

Note: All models can achieve opposite hinge location using the supplied parts.

| Product Dimensions | mm |
|--|--------|
| A Overall height of product | 874 |
| B Overall width of product | 592 |
| C Overall depth of product (excl. front door panels) | 579 |
| D Height from top of door panel to floor | 871 |
| E Minimum cabinetry clearance from side of door panel | 4 |
| F Minimum cabinetry clearance from top of door panel | 3 |
| G Height of door panel | 771 |
| H Depth of door panel | 19 |
| I Height from floor to bottom door panel | 100 |
| J Depth of toe kick (excl. front door and toe kick panels) | 50-100 |
| K Width of glass window | 404 |
| L Height of glass window | 496 |
| M Top of door panel to top of cut-out/window | 113 |
| N Depth of door (90° open, measured from front of cabinetry) | 600 |


| Cavity Dimensions | mm |
|--|-----|
| O Overall height of cavity | 874 |
| P Overall width of cavity | 600 |
| Q Minimum overall depth of cavity: | |
| When services are located outside of cavity (shallow)* | 600 |
| When services are located in the neighbouring cavities | 610 |
| When services are located at rear of cavity (deep) | 650 |

*Multiple product installation cavity depth is 610mm, this to allow space for the joiner kit bracket

Notes:
Product shown installed on the floor. Slide into cabinetry position.
Alternatively can be installed on a plinth. Adjust your cavity height accordingly.

INDICATES PRODUCT DATUM -----
INDICATES CABINERY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

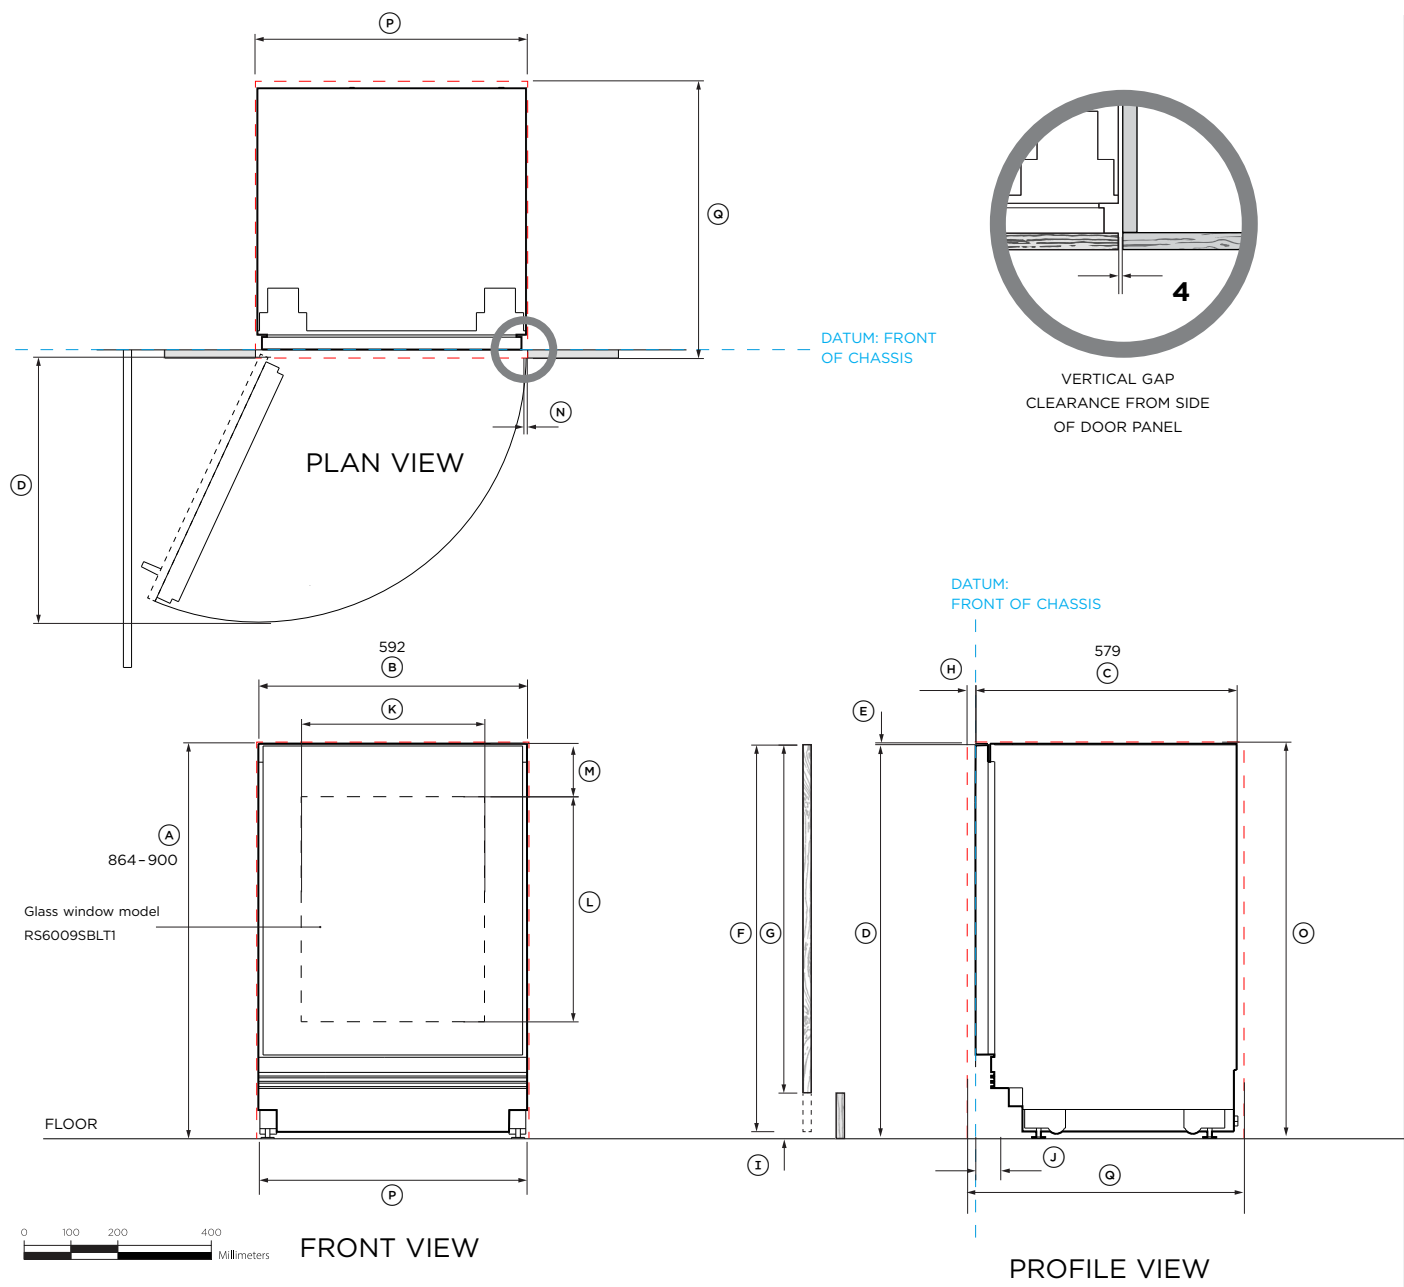

PRODUCT & CAVITY DIMENSIONS
Integrated Beverage Centres with Custom Door Panels

Model No:
RS6009BLT1 - Right hinge
RS6009BL1 - Right hinge

Note: All models can achieve opposite hinge location using the supplied parts.

| Product Dimensions | mm |
|--|---------|
| A Overall height of product | 864-900 |
| B Overall width of product | 592 |
| C Overall depth of product (excl. front door panels) | 579 |
| D Minimum cabinetry clearance from side of door panel | 4 |
| E Minimum cabinetry clearance from top of door panel | 3 |
| F Maximum height of custom door panel | 882 |
| G Minimum height of custom door panel | 761 |
| H Depth of custom door panel | 16-19 |
| I Height from floor to bottom of door panel | 15-150 |
| J Depth of toe kick (excl. front door and toe kick panels) | 50-100 |
| K Width of glass window | 404 |
| L Height of glass window | 496 |
| M Top edge of glass to top of custom door panel | 113 |
| N Depth of door (90° open, measured from front of cabinetry) | 600 |


| Cavity Dimensions | mm |
|---|---------|
| O Overall height of cavity | 864-900 |
| P Overall width of cavity | 600 |
| Q Minimum overall depth of cavity: | |
| When services are located outside of cavity (shallow)* | 600 |
| When services are located in the cabinet above the cavity | 610 |
| When services are located at rear of cavity (deep) | 650 |

*Multiple product installation cavity depth is 610mm, this to allow space for the joiner kit bracket

INDICATES PRODUCT DATUM -----
INDICATES CABINETY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

DESIGN INFORMATION PLANNING

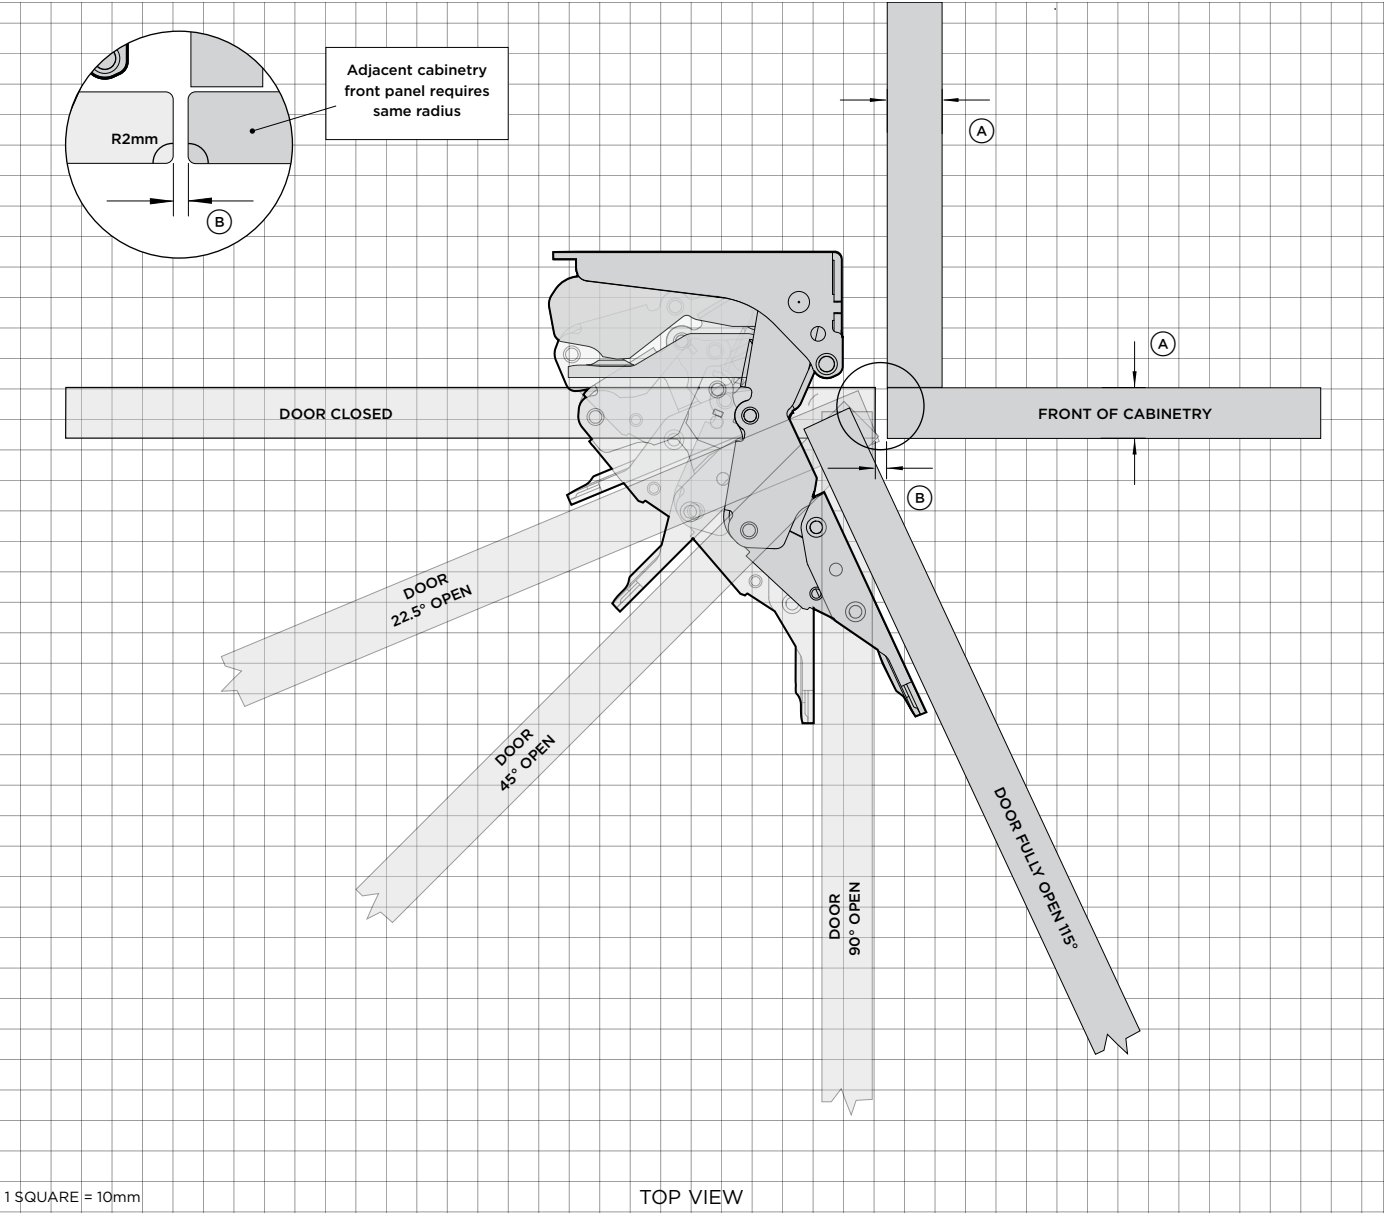

DOOR HINGE - HETTICH K08

Left hand hinge models are a mirrored version of shown.

CUSTOM FRONT PANEL

A Front panel thickness: 16mm-19mm
Drawing shown with 18mm panels.

B Gap between custom panel and adjacent cabinetry: 4mm

RADIUS REQUIREMENTS

Gap: Minimum 4mm

Panel thickness 16mm-19mm: Requires minimum R2mm

Panel thickness 20mm: Requires minimum R5mm

Minimum radius prevents clashes with adjacent cabinetry. Panels thicker than 20mm need a larger gap and radius, which might expose internal components.

WEIGHT LIMIT

Custom solid door panel: Max 5.6kg

Custom window door panel: Max 3.7kg


Note: Door weight's includes weight of handle.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.

designsupport@fisherpaykel.com


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

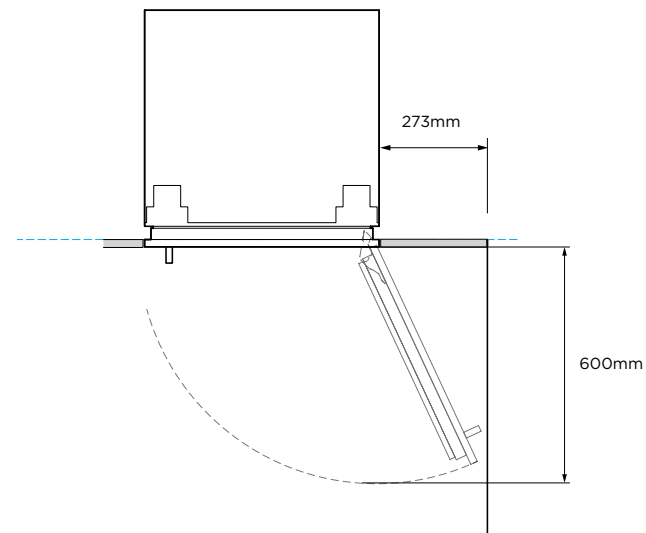

FULL INTERNAL ACCESS

115° door opening – full internal access


Minimum dimensions shown are for the contemporary handle kit AHD5RD09(B). Custom door panel and handle details need to be taken into account

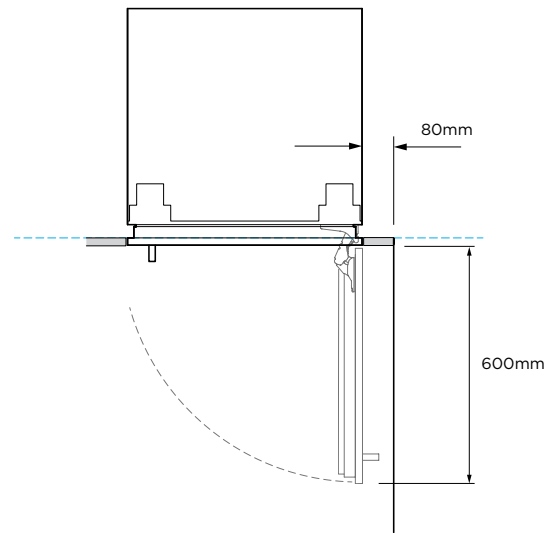

REDUCED INTERNAL ACCESS

Use hinge limiting pin to restrict door opening to 90° where necessary

Minimum dimensions shown are for the contemporary handle kit AHD5RD09(B). Custom door panel and handle details need to be taken into account

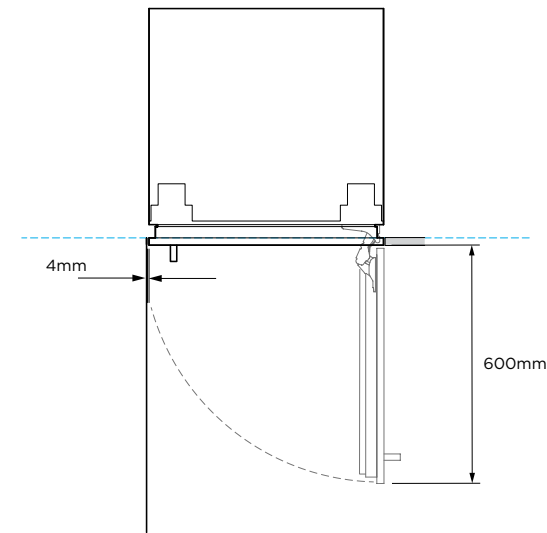

REDUCED INTERNAL ACCESS

Use hinge limiting pin to restrict door opening to 90° where necessary



Minimum dimensions shown are for the contemporary handle kit AHD5RD09(B). Custom door panel and handle details need to be taken into account

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

HINGE TO HINGE

- Ⓐ Both doors open at the same time – requires space between models
- Ⓑ Only allows a single door open at a time

Minimum dimensions shown are for the contemporary handle kit AHD5RD09(B). Custom door panel and handle details need to be taken into account.

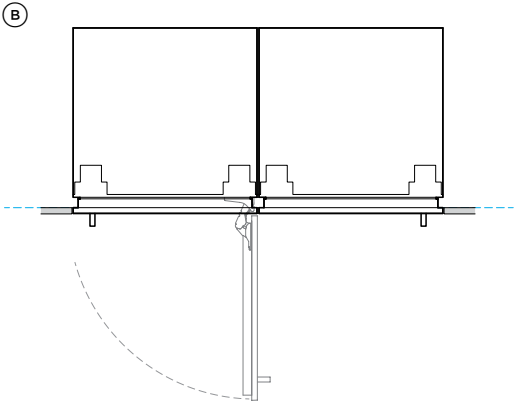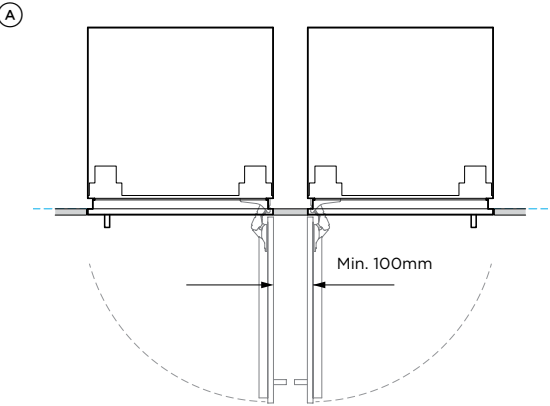



ADDITIONAL NOTES

Use hinge limiting pin to restrict door opening to 90° where necessary.

Minimum dimensions shown are for the contemporary handle kit AHD5RD09(B). Custom door panel and handle details need to be taken into account.



DUAL INSTALLATION

- Ⓒ Stainless steel door panels (gaps equalised during installation) – 5mm
- Ⓒ Custom door panels (width of custom door panel increased to maintain 4mm gap across multiple products) – 4mm

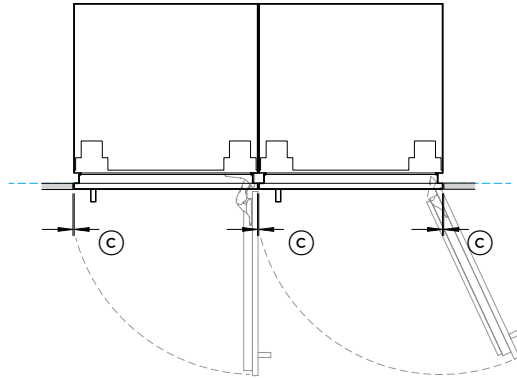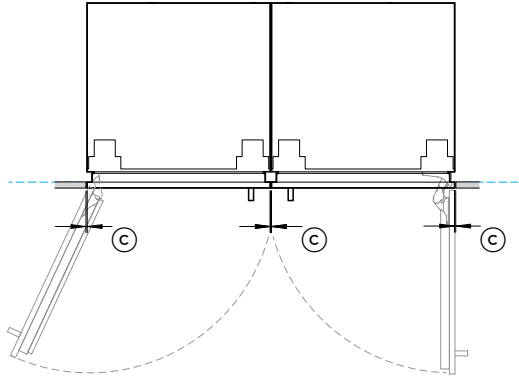


TRIPLE INSTALLATION

- Ⓓ Stainless steel door panels (gaps equalised during installation) – 6mm
- Ⓓ Custom door panels (width of custom door panel increased to maintain 4mm gap across multiple products) – 4mm

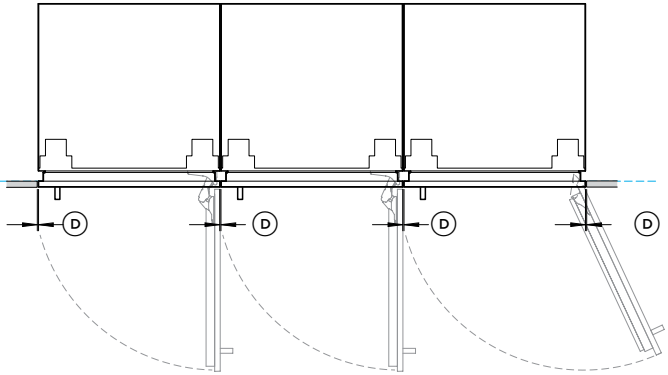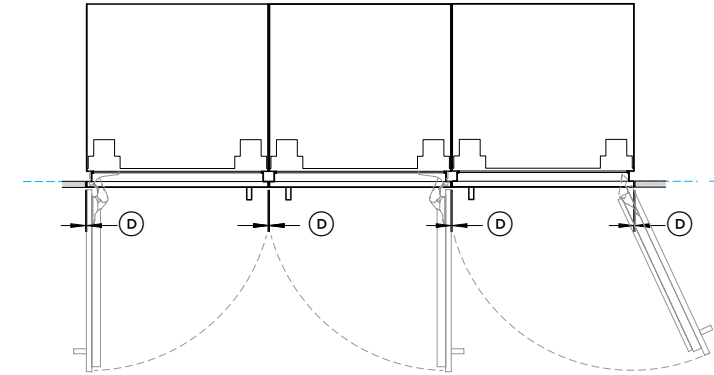

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

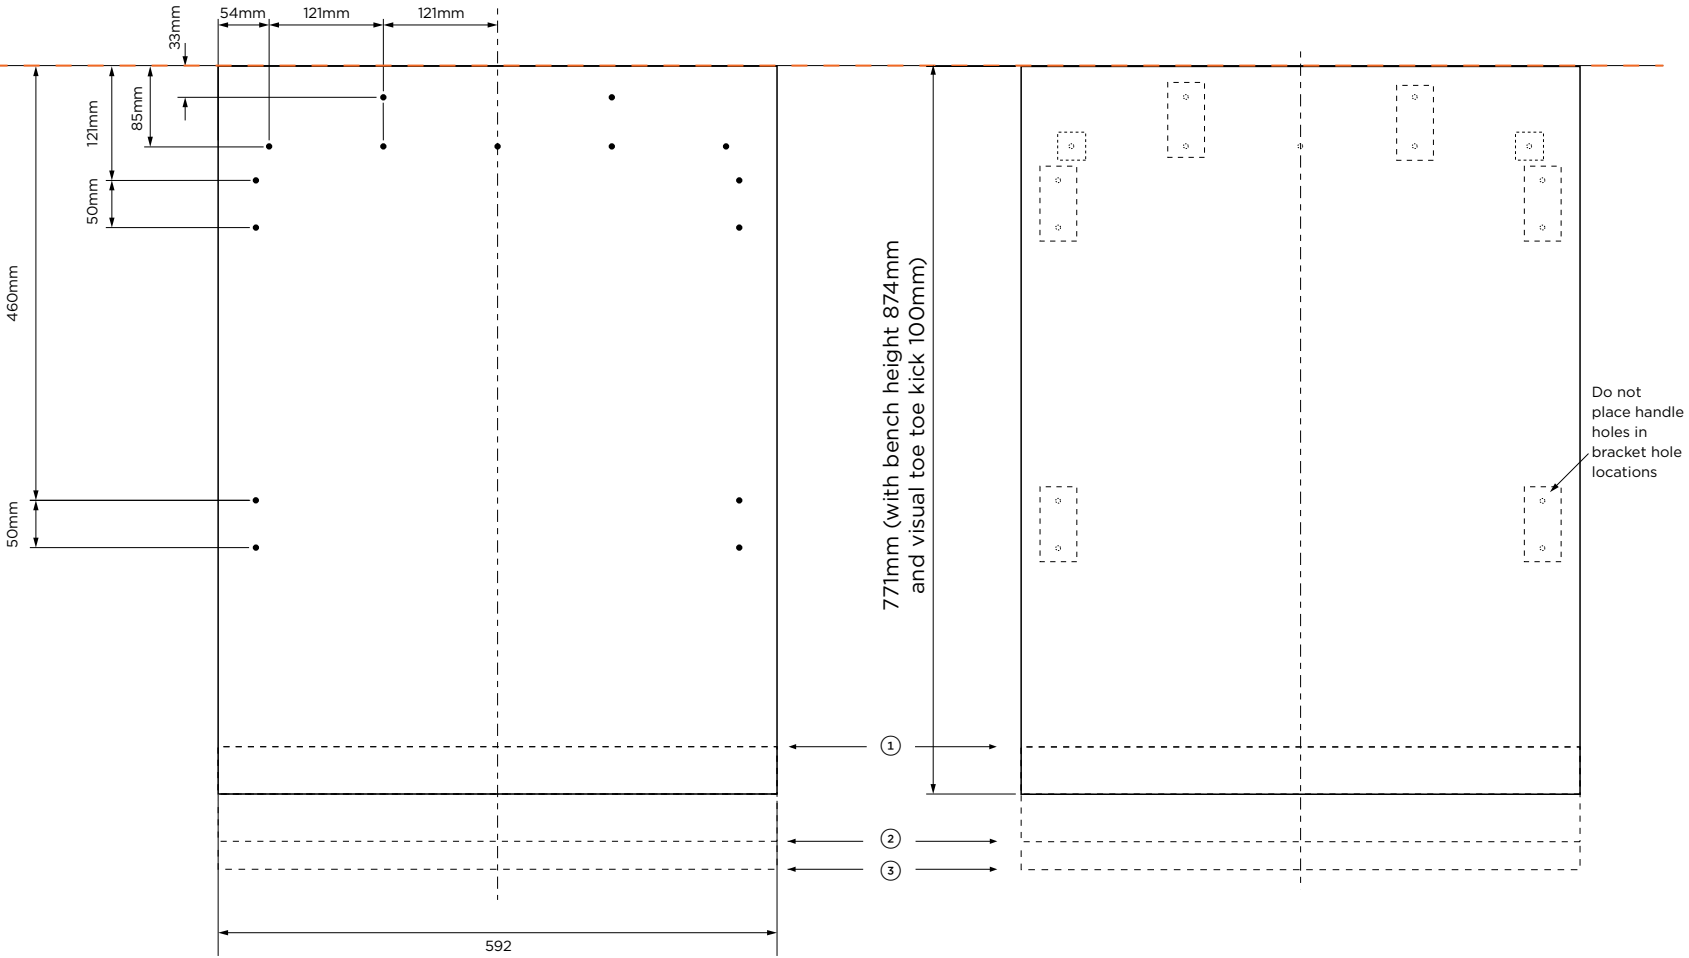

Model No:

RS6009V2R1
RS6009SBL1

**VISUAL TOE KICK HEIGHT
FROM FLOOR TO BOTTOM OF
DOOR PANEL**

- ① Visual toe kick height 150mm
custom door panel 50mm shorter
- ② Visual toe kick height 50mm
custom door panel 50mm longer
- ③ Visual toe kick height 15mm
custom door panel 85mm mm longer

**DATUM TOP OF CUSTOM
DOOR PANEL**

Allow 3 mm gap between the top of the
custom door panel and the bench top

**BACK OF CUSTOM DOOR PANEL
BRACKET HOLE LOCATIONS**

Ø 2.5mm pilot holes,
all holes 15mm deep
Do not penetrate front face


**FRONT OF CUSTOM DOOR PANEL
HANDLE HOLE LOCATIONS**

All Fisher & Paykel handle holes Ø 6mm.
Do not place handle holes in bracket hole locations.

CUSTOM PANEL WEIGHT

Maximum custom solid door
panel weight is 5.6kg

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

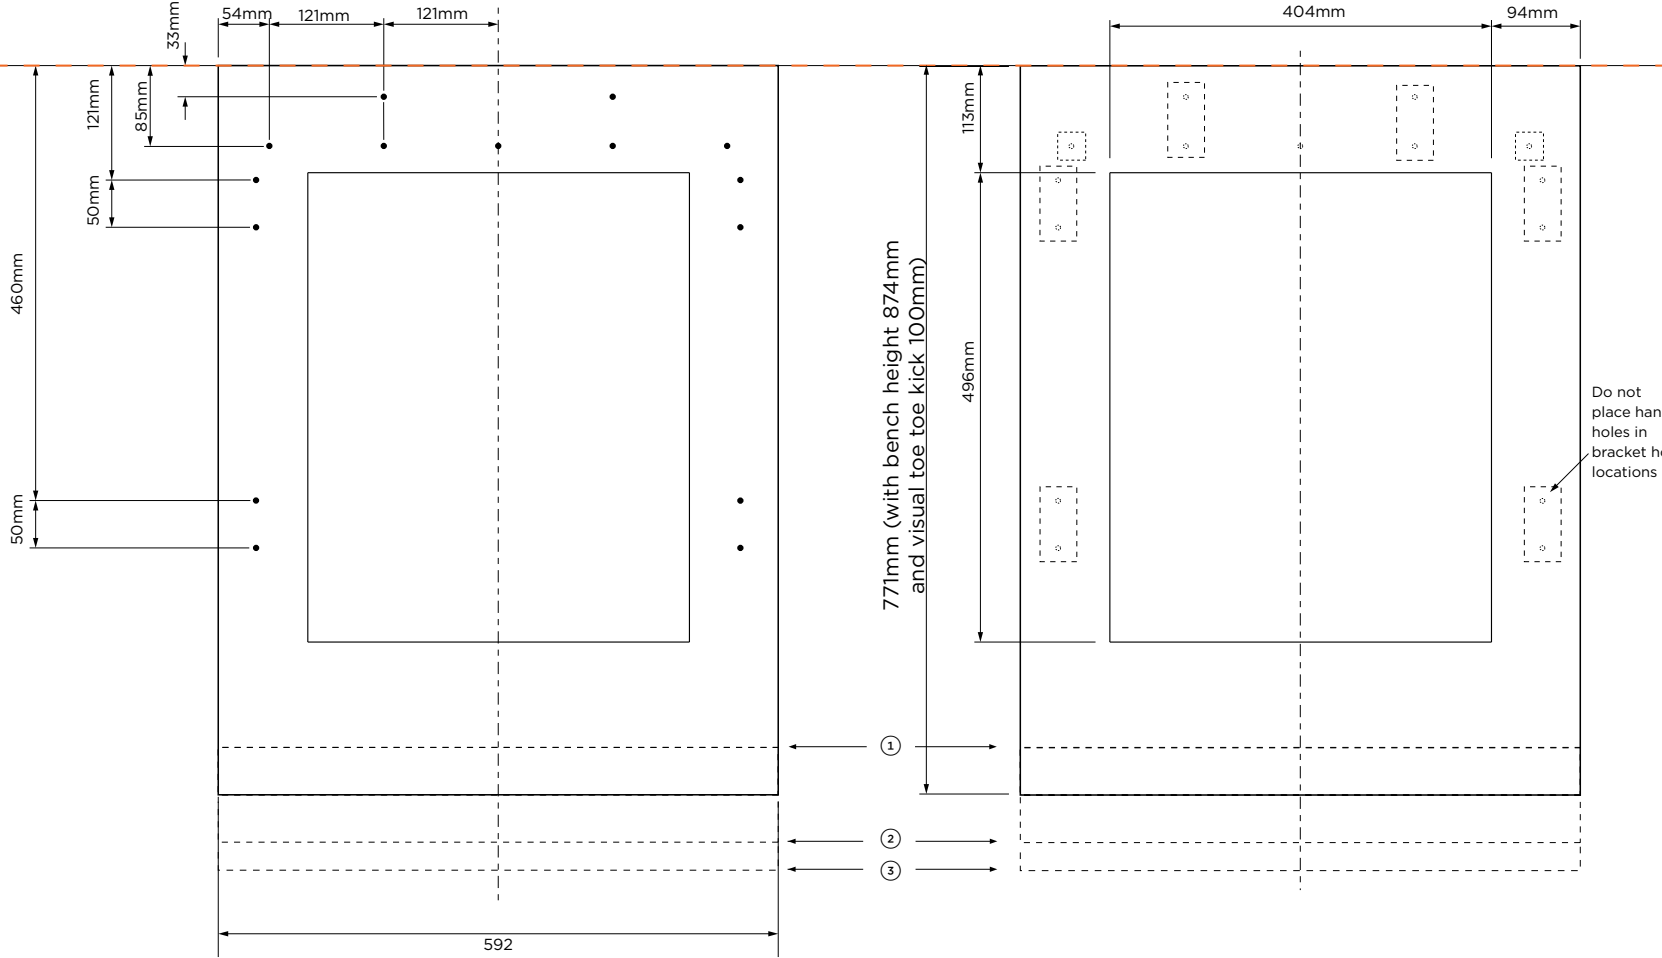

**BACK OF CUSTOM DOOR PANEL
BRACKET HOLE LOCATIONS**

Ø 2.5mm pilot holes,
all holes 15mm deep
Do not penetrate front face

**FRONT OF CUSTOM DOOR PANEL
HANDLE HOLE LOCATIONS**

All Fisher & Paykel handle holes Ø 6mm.
Do not place handle holes in bracket hole locations.


CUSTOM PANEL WEIGHT

Maximum custom window door panel
weight is 3.7kg

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

CUSTOM DOOR PANEL

Assisted Opening Accessories

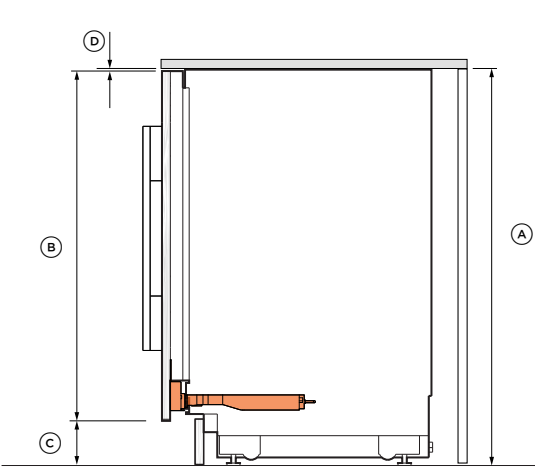


| Product Dimensions | | mm |
|--------------------|--------------------------------------|-----------|
| Ⓐ | Cavity height | 864 - 900 |
| Ⓑ | Maximum door panel height | 882 |
| | Minimum door panel height | 761 |
| Ⓒ | Visual toe kick height | 15 - 150 |
| Ⓓ | Gap between door panel and bench top | 3 |

Assisted Opening Accessories Planning Guide
available soon

CUSTOM DOOR PANEL

Sub-structure
Multiple installation - ensuring benchtop support

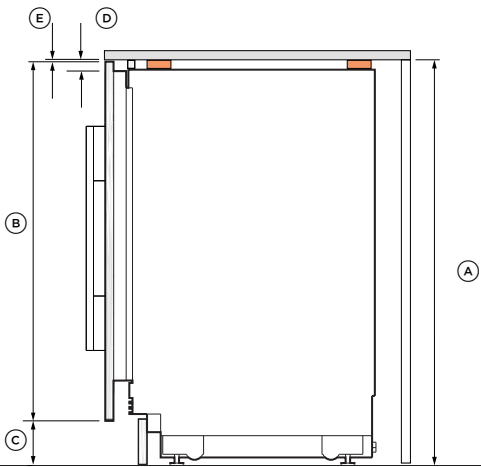


| Product Dimensions | | mm |
|--------------------|--------------------------------------|-----------|
| Ⓐ | Cavity height* | 888 - 918 |
| Ⓑ | Maximum door panel height* | 900 |
| | Minimum door panel height* | 785 |
| Ⓒ | Visual toe kick height | 15 - 150 |
| Ⓓ | Common sub-structure height | 18 |
| Ⓔ | Gap between door panel and bench top | 3 |

*With a 18mm sub-structure
**Adjust door panel template accordingly

Refer to 'Custom Panel Preparation' for Panel Templates

CUSTOM DOOR PANEL

Recessed handle

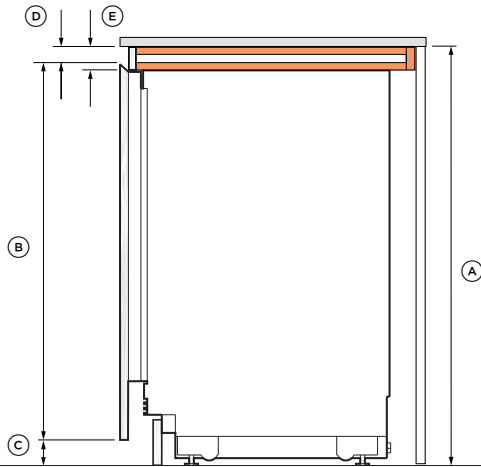


| Product Dimensions | | mm |
|--------------------|---|-----------|
| Ⓐ | Cavity height* | 909 - 945 |
| Ⓑ | Maximum door panel height* ** | 927 |
| | Minimum door panel height* ** | 812 |
| Ⓒ | Visual toe kick height | 15 - 150 |
| Ⓓ | Clearance between top door and benchtop | 35 |
| Ⓔ | Sub-structure | 45 |

*With a 45mm sub-structure
**Adjust door panel template accordingly

Bench top overhang not recommended for recessed handle

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

SERVICES

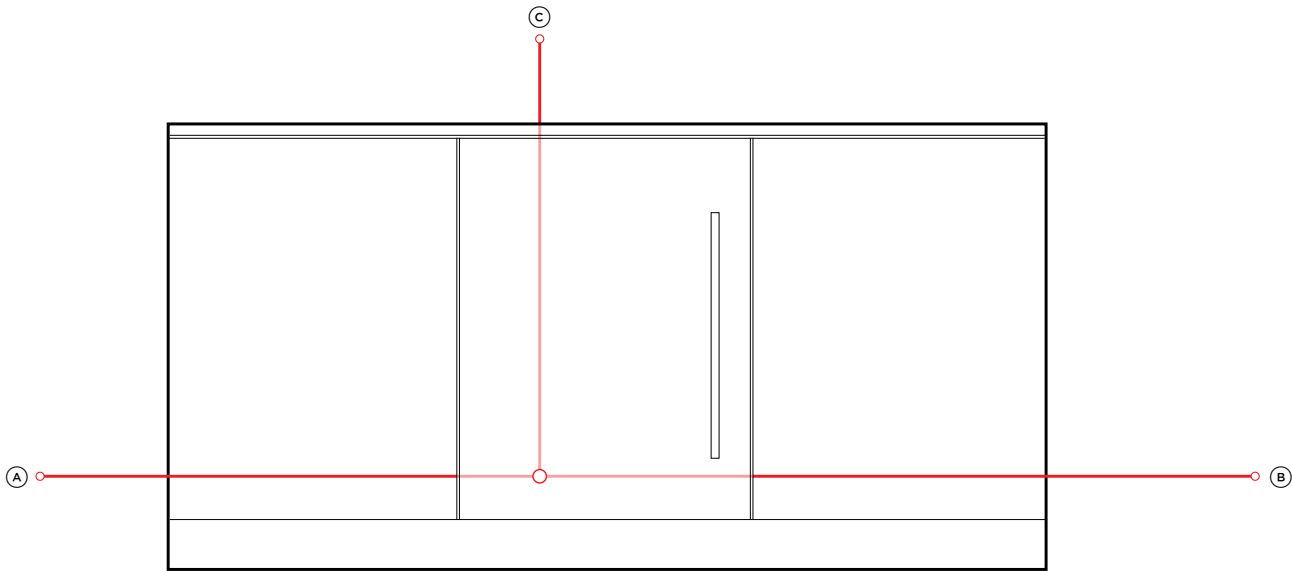

POWER AND WATER CONNECTIONS
Integrated Wine Cabinets &
Integrated Beverage Centres

Model No:
RS6009V2RT1, RS6009V2R1
Integrated Wine Cabinets
RS6009BLT1, RS6009BL1
Integrated Beverage Centres

All models can achieve opposite hinge location using the supplied parts.
Please refer to Installation Guide for details.

| Electrical Specifications | |
|---------------------------|------------------|
| Supply | 220-240 V, 50 Hz |
| Service | 10 A |

NOTE: Recommended that services are routed to the adjacent cabinet.

| Cord Lengths Electrical | inch | mm |
|---|----------|------|
| Ⓐ Power cord length (from the left edge of the product)* | 70 14/16 | 1800 |
| Ⓑ Power cord length (from the right edge of the product)* | 78 12/16 | 2000 |
| Ⓒ Power cord length (from the top of the product)* | 55 2/16 | 1400 |


* Excluding plug.

Recommended that services are located in neighbouring cabinets.

INDICATES PRODUCT DATUM -----
INDICATES CABINETRY CLEARANCES -----



IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

HANDLE DATA SHEETS

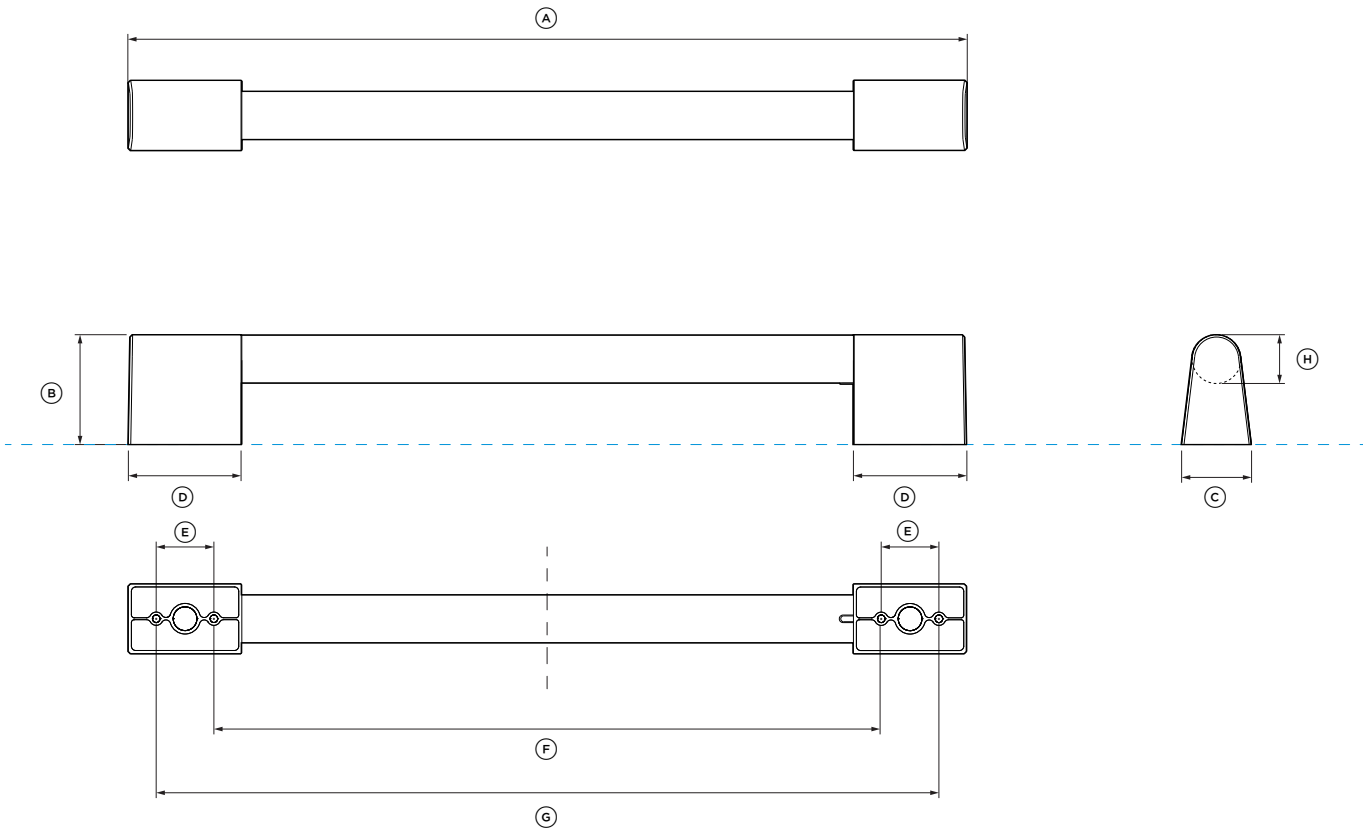

SCREWS

M5 X 12" Pan Head Socket Screw (4 per handle).
Suits standard 19mm panel. Thicker panels may require counterboring or longer screws.



HANDLE DATA SHEET
For all Integrated Wine Cabinet &
Integrated Beverage Centre models


Model No:
Professional Handle AHP3RD09

For Models:
RS6009V2RT1, RS6009V2R1
Integrated Wine Cabinets
RS6009SBLT1, RS6009SBL1
Integrated Beverage Centres

| Handle Dimensions | mm |
|---|-----|
| (A) Overall length of handle | 442 |
| (B) Overall height of handle | 58 |
| (C) Overall width of handle | 37 |
| (D) Length of off-stand | 60 |
| (E) Distance between attachment holes | 30 |
| (F) Distance between inner attachment holes | 353 |
| (G) Distance between outer attachment holes | 413 |
| (H) Thickness of handle rail | 25 |



INDICATES PRODUCT DATUM -----
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

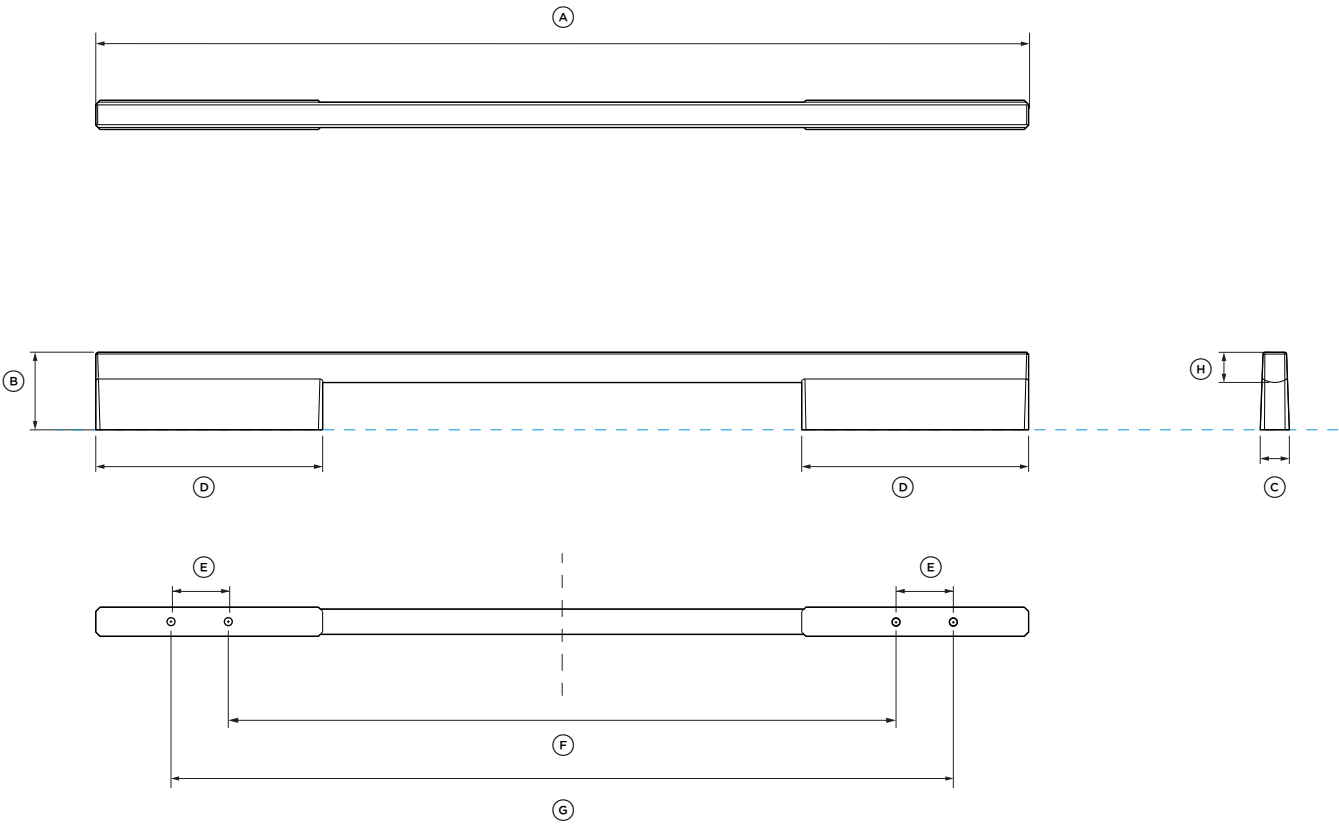

SCREWS

M5 X 12" Pan Head Socket Screw (4 per handle).
Suits standard 19mm panel. Thicker panels may require counterboring or longer screws.



HANDLE DATA SHEET
For all Integrated Wine Cabinet &
Integrated Beverage Centre models


Model No:
Fine Aluminium Handle AHD5RD09
Fine Black Aluminium Handle AHD5RD09B

For Models:
RS6009V2RT1, RS6009V2R1
Integrated Wine Cabinets
RS6009SBLT1, RS6009SBL1
Integrated Beverage Centres

| Handle Dimensions | mm |
|---|-----|
| A Overall length of handle | 493 |
| B Overall height of handle | 41 |
| C Overall width of handle | 15 |
| D Length of off-stand | 120 |
| E Distance between attachment holes | 30 |
| F Distance between inner attachment holes | 353 |
| G Distance between outer attachment holes | 413 |
| H Thickness of handle rail | 16 |



INDICATES PRODUCT DATUM -----
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

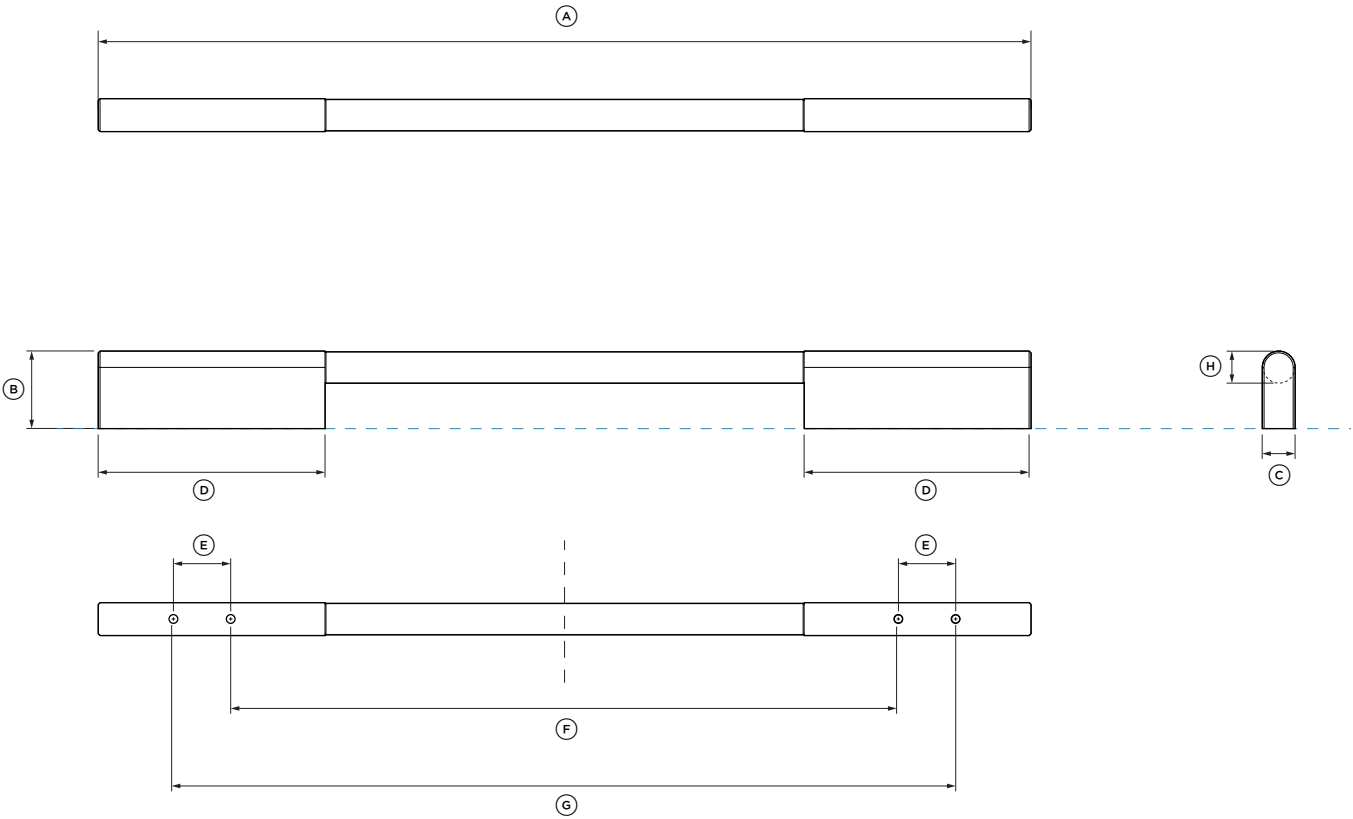

SCREWS

M5 X 12" Pan Head Socket Screw (4 per handle).
Suits standard 19mm panel. Thicker panels may require counterboring or longer screws.



HANDLE DATA SHEET
For all Integrated Wine Cabinet &
Integrated Beverage Centre models


Model No:
Fine Round Handle AHSRD09

For Models:
RS6009V2RT1, RS6009V2R1
Integrated Wine Cabinets
RS6009SBLT1, RS6009SBL1
Integrated Beverage Centres

| Handle Dimensions | mm |
|---|-----|
| A Overall length of handle | 493 |
| B Overall height of handle | 41 |
| C Overall width of handle | 17 |
| D Length of off-stand | 120 |
| E Distance between attachment holes | 30 |
| F Distance between inner attachment holes | 353 |
| G Distance between outer attachment holes | 413 |
| H Thickness of handle rail | 17 |



INDICATES PRODUCT DATUM -----
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

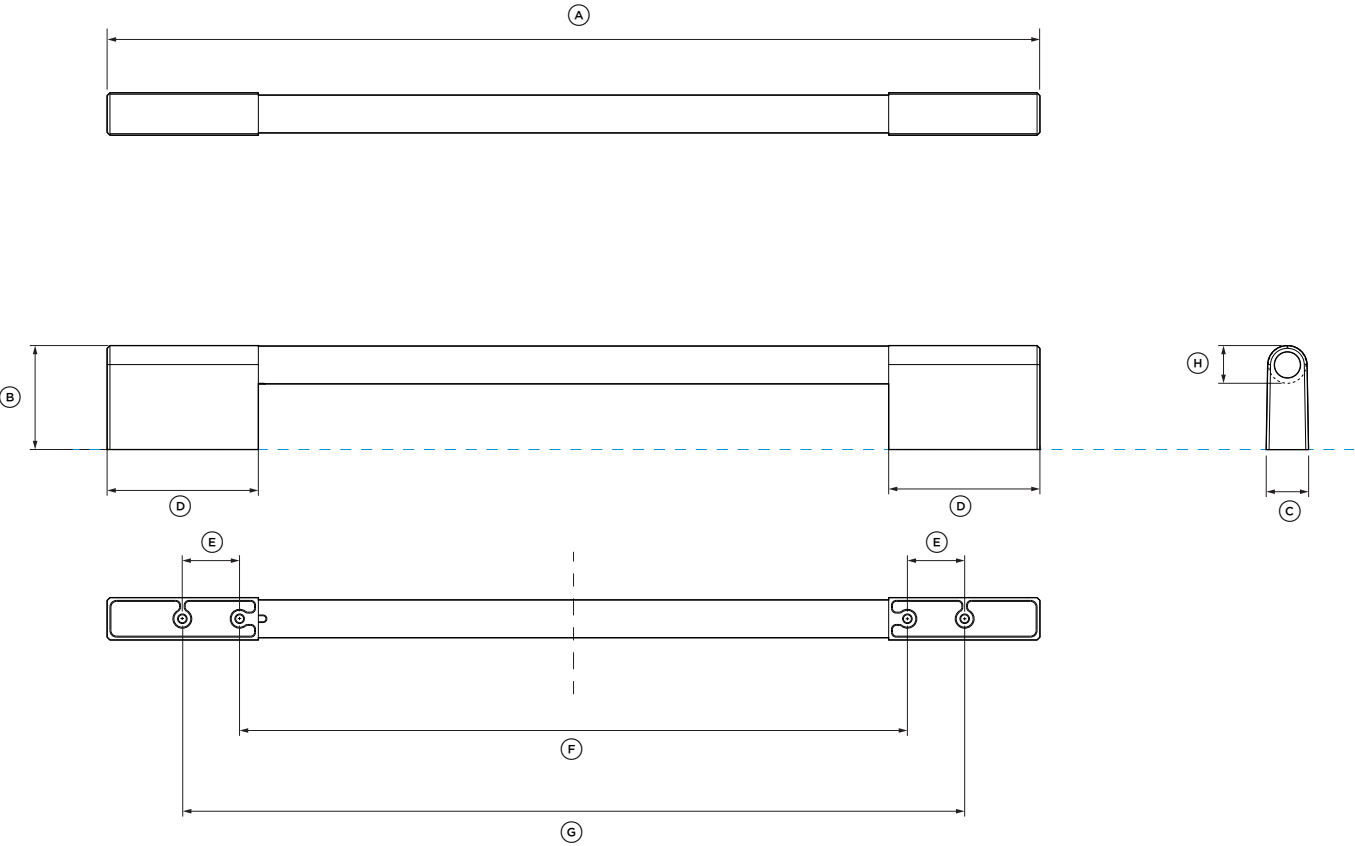

SCREWS

M5 X 12" Pan Head Socket Screw (4 per handle).
Suits standard 19mm panel. Thicker panels may require counterboring or longer screws.



HANDLE DATA SHEET
For all Integrated Wine Cabinet &
Integrated Beverage Centre models

Model No:
Classic Handle AHCLRD09

For Models:
RS6009V2RT1, RS6009V2R1
Integrated Wine Cabinets
RS6009SBLT1, RS6009SBL1
Integrated Beverage Centres

| Handle Dimensions | | mm |
|-------------------|---|-----|
| A | Overall length of handle | 414 |
| B | Overall height of handle | 55 |
| C | Overall width of handle | 22 |
| D | Length of off-stand | 80 |
| E | Distance between attachment holes | 30 |
| F | Distance between inner attachment holes | 353 |
| G | Distance between outer attachment holes | 413 |
| H | Thickness of handle rail | 20 |

INDICATES PRODUCT DATUM -----
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

