FABRIC CARE

PLANNING GUIDE

Series 11 Fabric Care Cabinet | FC1260H2 FC1260HG2 Series 11 Front Loader Washer| WH1260H5 WH1260HG5 Series 11 Heat Pump Dryer | DH1060H5 DH1060HG5 Series 11 Display-free Heat Pump Dryer | DH1060HL5

Series 11 Storage Plinth | FM2060S2 FM2060SG2 Stacking Kit with Tray | ASKS60W5 ASKS60G5

FISHER & PAYKEL

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team. designsupport@fisherpaykel.com

NOTES


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. For the latest version of this document, please visit our website at fisherpaykel.com. Product specifications may vary from those shown.

This Planning Guide is not intended to be used as installation guidance for any product. Detailed installation instructions are available on our website.


CONTENTS

| CONCEPT DESIGN PAGE | | DEVELOPED AND DETAILED DESIGN | D DESIGN PAGE DEVELOPED AND DETAILED DES | | SIGN PAGE |
|--------------------------------------------|----|-------------------------------|------------------------------------------|--|-----------|
| PRODUCT OVERVIEW | | | | | |
| Product Overview | 4 | | | | |
| Product Configurations | 5 | | | | |
| SPECIFICATION GUIDE | | | | | |
| Fabric Care - All Models | 7 | | | | |
| Fabric Care - Cabinet | 8 | | | | |
| Front Loader Washer Specification | 9 | | | | |
| Display-free Heat Pump Dryer Specification | 10 | | | | |
| Heat Pump Dryer Specification | 11 | | | | |
| Fabric Care Cabinet Specification | 12 | | | | |

PRODUCT OVERVIEW

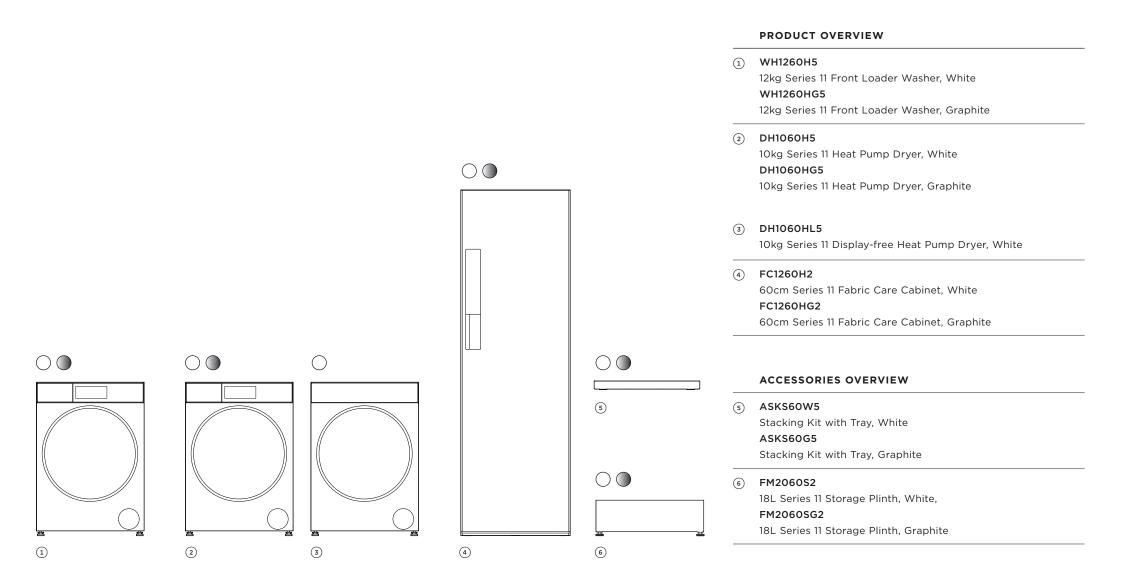

SPECIFICATION GUIDE | CONFIGURATIONS

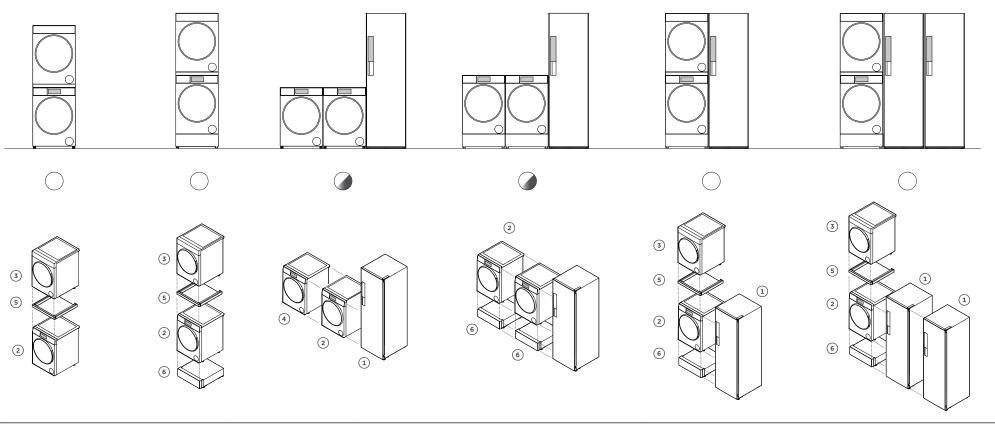

| | MODEL CODE | COLOUR | MODEL CODE | COLOUR | PRODUCT DESCRIPTION | HINGE LOCATION |
|------|------------|---------|------------|----------|------------------------------|------------------------------------|
| 1 | FC1260H2 | White | FC1260HG2 | Graphite | Fabric Care Cabinet | Right Hand Hinge |
| 2 | WH1260H5 | White | WH1260HG5 | Graphite | Front Loader Washer | Left Hand Hinge |
| 3 | DH1060HL5 | White | - | - | Display-free Heat Pump Dryer | Left Hand Hinge, Reversible Hinge |
| 4 | DH1060H5 | White | DH1060HG5 | Graphite | Heat Pump Dryer | Right Hand Hinge, Reversible Hinge |
| 5 | ASKS60W5 | White | ASKS60G5 | Graphite | Stacking Kit with Tray | - |
| 6 | FM2060S2 | White | FM2060SG2 | Graphite | 18L Series 11 Storage Plinth | - |
| * 01 | h | - 1- 1- | | | | |

* Other product configuration possible

SPECIFICATION GUIDE





OVERVIEW

Care for every corner of the wardrobe with an ecosystem of fabric care products that combine diverse functions to deliver exceptional results. From precision sensing to autonomous technologies, the fabric care suite removes the guesswork, delivering the perfect balance across each product to ensure optimal care for every garment.

PRODUCTS | SERIES 11

FC1260H2 | FC1260HG2 60cm Fabric Care Cabinet, White | Graphite

WH1260H5 | WH1260HG5 12kg Front Loader Washer, White | Graphite

DH1060HL5 10kg Display-free Heat Pump Dryer, White

DH1060H5 | DH1060HG5 10kg Heat Pump Dryer, White | Graphite

ACCESSORIES | SERIES 11

ASKS60W5 | ASKS60G5 Stacking Kit with Tray, White | Graphite

FM2060H2 | FM2060HG2 18L Storage Plinth, White | Graphite

FEATURES

- With multiple configurations from compact to large, this modular fabric care solution is designed to work for every space of the evolving home.
- ② From delicates to durables, and everyday to occasional, there is a specialist cycle that ensures optimal care for a wide range of garments.
- ③ A range of specialised environments and cycles extends the life of your garments while caring for them with minimal environmental impact.
- ④ Timeless in design, the fabric care suite is engineered with premium materials and precise manufacturing, enabling long-lasting care for both product and garment.



OVERVIEW

Enjoy the luxury of ready-to-wear convenience with the Fabric Care Cabinet, thoughtfully designed to bring tailored care to your wardrobe. Gentle features like refreshing, deodorising, sanitising, and drying help keep your delicate fabrics, from silk to wool and leather, looking their best.

PRODUCTS | SERIES 11

FC1260H2 | FC1260HG2 60cm Fabric Care Cabinet, White | Graphite

FEATURES

- Experience effortless garment care with treatments like refreshing, drying, deodorising, and sanitising, all tailored for different fabric types in a convenient cabinet.
- ② Create a complete fabric care ecosystem by pairing with our Front Loader Washing Machine and Heat Pump Dryer.
- ③ Choose from sleek Graphite Steel Finish or classic White Steel finish for a clean, considered laundry.
- ④ Connected Home and Wi-Fi enabled. The cabinet connects with the Fisher & Paykel SmartHQ[™] app for seamless control.
- S The non-plumbed design provides flexibility, making it suitable for any area in your home.
- Customised care for a wide range of garment types, from leather, wool and silk to outdoor gear, with treatments tailored to varying durability levels. Conveniently treat up to 12 garments at a time.
- Preserve the quality of delicate silks, woollens, and cottons by reducing the need for frequent washing.
- (a) Spacious capacity with multiple loading configurations, and four adjustable folding racks.
- ④ Keep footwear fresh and hygienic with a dedicated shoe care cycle, complete with a specialised shoe rack.
- Designed to minimise energy and water usage by reducing the reliance on traditional washing methods.

SPECIFICATION GUIDE | FRONT LOAD WASHER

PRODUCT DIMENSIONS CAVITY DIMENSIONS SPECIFICATIONS Model Number WH1260H5* Front Loader Washer, White (D) WH1260HG5* E в Front Loader Washer, Graphite C *Left Hand Hinge **Product Dimensions** (A) H 850mm W 602mm D 661mm A Electrical 220-240 V, 50 Hz Supply Service 10 A Connection 3-prong grounding-type PROFILE VIEW FRONT VIEW ISOMETRIC VIEW Plumbing Supply Hose set provided Service Max. 1MPa (150psi); Min. 50KPa (7psi); Min 6 litres/min mm mm (A) Overall height 850 A Minimum height 865 Height of adjustable mounted feet max +10 Minimum width 622 Overall width 602 © Minimum depth 668 © Overall depth* 661 Minimum gap to adjacent product and 10 cabinetry Depth with the door open 1146 Minimum visual gap to adjacent product E Door clearance to adjacent wall 267 15 and cabinetry* ** *Includes door when closed * Visual gap is different from the gap between products due to the angled front on the product **Applies to sides and top The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. For the latest version of this document, please visit our website at fisherpaykel.com. Product specifications may vary from those shown. The Planning Guide is not intended to be used as installation guidance for any product. Detailed installation instructions are available on our website.

SPECIFICATION GUIDE | HEAT PUMP DRYER

PRODUCT DIMENSIONS CAVITY DIMENSIONS SPECIFICATIONS Model Number DH1060HL5* ** Display-free Heat Pump Dryer, White (D) E в * Inter-Product communication cable is included (c) ** Left Hand Hinge, Reversible Hinge **Product Dimensions** (A) H 850mm W 602mm D 682mm (A) Electrical Supply 220-240 V, 50 Hz Service 10 A Connection 3-prong grounding-type FRONT VIEW PROFILE VIEW ISOMETRIC VIEW Plumbing Hose set provided Supply Service Max. 1MPa (150psi); Min. 50KPa (7psi); Min 6 litres/min mm mm (A) Overall height 850 A Minimum height 865 min -5 ^(B) Minimum width 622 Height of adjustable mounted feet max +5 © Minimum depth 688 (B) Overall width 602 Minimum gap to adjacent product and 10 © Overall depth* 682 cabinetry Depth with the door open Minimum visual gap to adjacent product 1167 15 and cabinetry* ** 267 (E) Door clearance to adjacent wall * Visual gap is different from the gap between products due to the angled *Includes door when closed front on the product **Applies to sides and top The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. For the latest version of this document, please visit our website at fisherpaykel.com. Product specifications may vary from those shown. The Planning Guide is not intended to be used as installation guidance for any product. Detailed installation instructions are available on our website.

SPECIFICATION GUIDE | HEAT PUMP DRYER

| | FIONS | PRODUCT DIMENSIONS | | CAVITY DIMENSIONS | |
|---------------------------|-----------------------------------------------------------------|--------------------------------------------------------------------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| Model Number | r | _ | | | |
| DH1060H5* | Heat Pump Dryer, White | | D | | |
| DH1060HG5* | Heat Pump Dryer, Graphite | E B | L © | | |
| * Right Hand | d Hinge, Reversible Hinge | | | | |
| Product Dime | nsions | | | | \geq |
| I 850mm W 6 | 02mm D 682mm | | | | |
| Electrical | | | | | |
| Supply | 220-240 V, 50 Hz | | <u> </u> | | |
| Service | 10 A | | | | |
| Connection | 3-prong grounding-type | <u>+</u> | | | |
| | | FRONT VIEW | PROFILE VIEW | ISOMETRIC VIEW | |
| Plumbing | | | | | |
| Supply | Hose set provided | | | | |
| | | | | | |
| Service | Max. 1MPa (150psi); Min. 50KPa (7psi); Min. 6 litros(min | | | | |
| Service | Max. 1MPa (150psi); Min. 50KPa (7psi); Min 6 litres/min — | _ | mm | | mr |
| Service | | Overall height | | Minimum height | m r 86: |
| service | | · · · · · · · · · · · · · · · · · · · | | Minimum height Minimum width | |
| service | | Overall height Height of adjustable mounted feet | 850 | | 86 |
| service | | · · · · · · · · · · · · · · · · · · · | | Minimum width | 863 623 683 |
| service | | Height of adjustable mounted feet | | Minimum width O Minimum depth | 86 |
| Service | | Height of adjustable mounted feet | 850 | Minimum width | 863 623 683 |
| Service | | Height of adjustable mounted feet Overall width Overall depth* | 850 min -5 max +5 602 682 | Minimum width Minimum depth Minimum gap to adjacent product and cabinetry Minimum visual gap to adjacent product and cabinetry* ** | 86. 62. 68: 10 |
| Service | | Height of adjustable mounted feet B Overall width C Overall depth* Depth with the door open | 850 min -5 max +5 602 682 1167 | Minimum width | 863 623 683 10 11 |
| Service | | Height of adjustable mounted feet | 850 min -5 max +5 602 682 1167 | Minimum width Minimum depth Minimum gap to adjacent product and cabinetry Minimum visual gap to adjacent product and cabinetry* ** * Visual gap is different from the gap between products d front on the product | 6 |

SPECIFICATION GUIDE | FABRIC CARE CABINET

| SPECIFICAT | IONS | PRODUCT DIMENSIONS | |
|-------------------------------|--------------------------------|----------------------------------------------|---------------------------------------------------------------|
| Model Number FC1260H2* | Fabric Care Cabinet, White | (B) (E) (O) | |
| FC1260HG2* * Right Hand | Fabric Care Cabinet, Graphite | | |
| Product Dimer H 1900mm W 6 | nsions 600mm D 660mm | | |
| Electrical | | | |
| Supply | 220-240 V, 50 Hz | | |
| Service | | | |
| Connection | 3-prong grounding-type | | |
| | | | |
| | | | mm mm |
| | | Overall height | 1900 (A) Minimum height 1915 |
| | | Height of adjustable mounted feet | max +12 [®] Minimum width 630 |
| | | Overall width | 600 © Minimum depth 700 |
| | | © Overall depth* | 666 Minimum visual gap to adjacent cabinetry 15 |
| | | Depth with the door open | 1285 and product* *Applies to sides and top |
| | | © Door clearance to adjacent wall | min 235 |
| | | *With door closed | |