91CM FREESTANDING COOKER, INDUCTION

PLANNING GUIDE

RIV3-915

FISHER & PAYKEL

This comprehensive Planning Guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONTENTS

CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
Specification Guide	3	Data Sheet	6
Freestanding Cooker, Induction, 91cm	4	Freestanding Cooker, Induction, 91cm	7

SPECIFICATION GUIDE

OVERVIEW

This 91cm Freestanding Cooker with Induction Cooktop offers the best of both worlds. Enjoy the instant-response, easy to clean and energy efficiency of induction cooking while the generous 136L total capacity oven offers plenty of space to cook multiple dishes at once. Easy-to-use, it has an intuitive touchscreen display, pairing powerful functionality with a singular aesthetic treatment.

PRODUCTS

RIV3-915

Freestanding Cooker, Induction, 91cm 5 Zones, with SmartZone, Self-cleaning

FEATURES

- ① Generous size perfect for larger kitchens
- ② Five induction cooking zones, which can be paired to form two large SmartZones
- 3 Guided cooking using a touchscreen makes it simple to cook by food, function or recipe
- 4 Less heat is wasted during induction cooking as only the cookware is heated, not the cooktop surface
- 5 Single glass cooking surface can be easily wiped clean
- © Cooktop remains cool to touch until a pot or pan is placed on the surface
- ① LED halo-illuminated dials provide information at a glance

SERIES & STYLE

Series 9 Professional

ACCESSORIES


- 1 Food probe
- ② Grill pan
- 3 Grill rack
- 4 Full-extension telescopic racks

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

SPECIFICATIONS


Model No.	H 908 - 933mm W 911mm D 740mm	
Dimensions		
Weight		
Packaged	200kg	
Unpackaged	176kg	
Total Oven Capacity	136L	
Door Clearance	486mm	
Electrical		
Supply	220-240 V, 50 Hz	
Service	40 A	
Connection	Terminal Block	

PRODUCT DIMENSIONS



		mm
A	Overall height (from floor to cooktop, excl. vent trim)	min 908 max 933
В	Overall width	911
©	Overall depth (excl. handles and dials)	740

CAVITY DIMENSIONS: STANDARD INSTALLATION




	mm
Overall height of cavity*	908
	933
Overall width	914
© Minimal depth of cavity	
 Proud installation 	644
Flush installation	703
Service area H152mm x W835mm x D51mm	

^{*}Depending on height of range.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

DATA SHEET

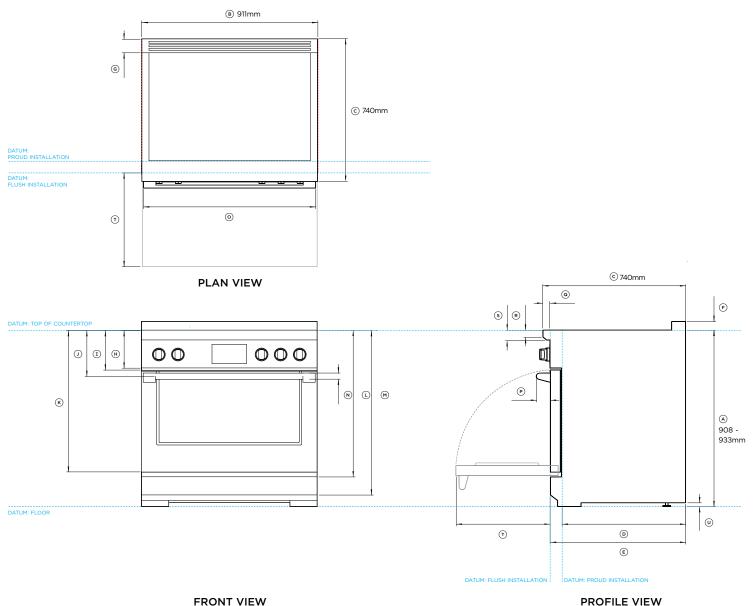

Model no:

Freestanding Cooker, Induction, 91cm - RIV3-915

Product Dimensions	mn
 Height of range (from floor to cooktop, excluding rear trim) 	min 908 max 933
® Overall width of range	91
© Overall depth of product (excluding handle and dials)	740
Depth of proud installation	644
© Depth of flush installation	703
F Height of rear trim	45
Depth of rear trim	7:
Height from counter top to bottom of control panel	196
 Height from countertop to top of foor 	206
Height of countertop to centre of handle	239
Height from counter top to bottom of door	733
(i) Height from counter top of lower panel	76
Height from counter top to bottom of lower panel	85!
N Thickness of handle rail	32
Width of handle (including off-stand)	892
Depth of handle (measured from front of door)	7:
Depth of front of cooktop to control panel	37
R Height of cooktop front face	35
§ Height from top of cooktop to control panel	5
Depth of open door to cabinetry face - flush	486
Adjustable feet height	min 13 max 38
Cavity Dimensions: Standard Installation	
Overall width of cavity	min 914
Overall depth of cavity for proud installation	max 644
Overall depth of cavity for flush installation	max 703

IMPORTANT NOTE: For full installation please refer to our installation manual


INDICATES CABINETRY / PRODUCT DATUM -------INDICATES CABINETRY CLEARANCES ------

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

- for level counter

- with levelling legs fully extended

908

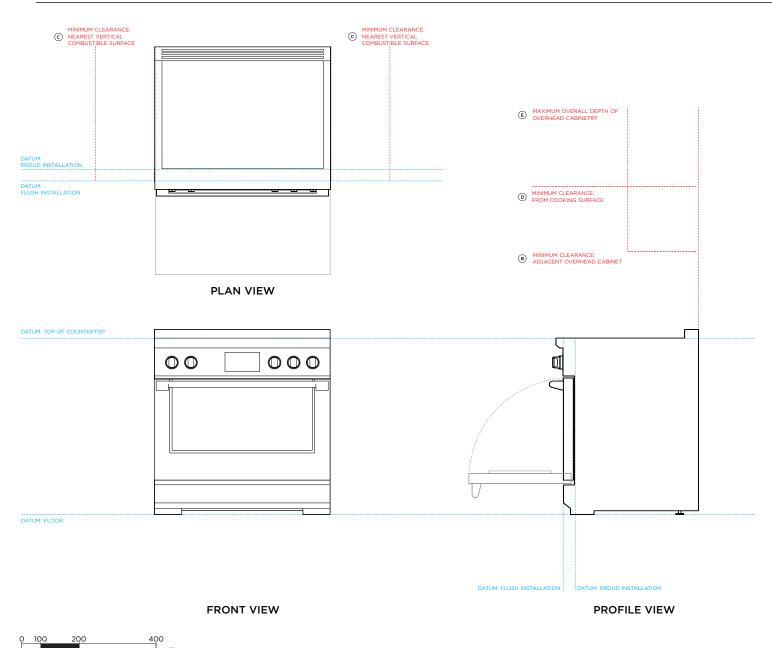

Model no:


Freestanding Cooker, Induction, 91cm - RIV3-915

Cle	earance Dimensions	mm
A	Minimum width of ventilation hood installed above cooktop - not shown*	914
В	Minimum vertical distance between countertop and cabinet extending above counter	457
©	Minimum clearance from left and right edge of cooktop to nearest vertical combustuble surface	305
0	Minimum clearance from cooking surface to: - combustible surface centred above the cooking surface	762
	- combustible covering ventilation hood centred above the cooking surface	762
	- non combutsible surface* centred above the cooking surface	762
E	Maximum overall depth of overhead cabinetry	330

*IMPORTANT NOTE: For full installation please refer to our installation manual

INDICATES CABINETRY / PRODUCT DATUM ------INDICATES CABINETRY CLEARANCES ------

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

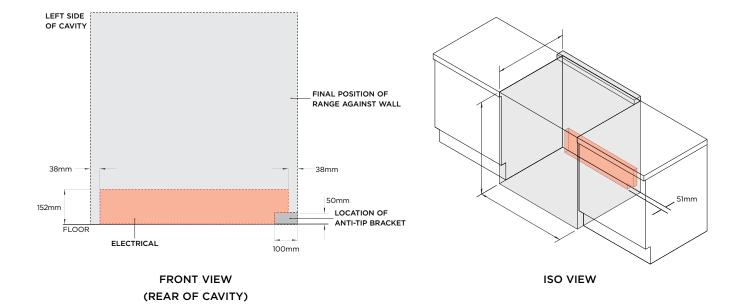

IMPORTANT NOTE: For full installation please refer to our installation manual

INDICATES CABINETRY / PRODUCT DATUM ------INDICATES CABINETRY CLEARANCES ------

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com