

## 60CM OVENS AND COMPANIONS MINIMAL

---

# PLANNING GUIDE

---

**OVEN** | OB60SMPTDB1, OB60SMPTDG1

**STEAM OVEN** | OS60SMTDB1, OS60SMTDG1, OS60NMTDB1, OS60NMTDG1

**COMBINATION MICROWAVE OVEN** | OM60NMTDB1, OM60NMTDG1

**BUILT-IN COFFEE MAKER** | EB60MSB1, EB60MSG1

**WARMING DRAWER** | WB60SMB1-SET, WB60SMG1-SET, WB60SMTB1-SET

**VACUUM SEAL DRAWER** | VB60SMB1-SET, VB60SMG1-SET

**FISHER & PAYKEL**

This comprehensive Planning Guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONTENTS

CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
<b>Design Choices</b>		<b>Data Sheets</b>		<b>Planning Considerations</b>	
Ovens and Companions - ALL MODELS	4	Oven	19	Cabinetry Preparation - ALL MODELS	28
Configurations - ALL MODELS	5	Combination Steam Oven	20	Configurations - ALL MODELS	29
Overview - ALL MODELS	6	Combination Steam Oven	21	Oven	30
		Combination Microwave Oven	22	Combination Steam Oven	31
<b>Specification Guides</b>		Built-in Coffee Maker	23	Combination Steam Oven	32
Oven	8	Warming Drawer, Tall	24	Combination Microwave Oven	33
Combination Steam Oven	9	Warming Drawer	25	Built-in Coffee Maker	34
Combination Steam Oven	10	Vacuum Seal Drawer	26	Warming Drawer, Tall	35
Combination Microwave Oven	11			Warming Drawer	36
Built-in Coffee Maker	12			Vacuum Seal Drawer	37
Warming Drawer, Tall	13				
Warming Drawer	14			<b>Services</b>	
Vacuum Seal Drawer	15			Power Cord Length and Location - COMPANIONS	39
Dimensions - ALL MODELS	16			Power Cord Length and Location - OVENS	40
Power, Weight and Capacity - ALL MODELS	17				

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

## DESIGN CHOICES

## OVENS

## STEAM OVENS

## MICROWAVES

## COFFEE MAKER

## DRAWERS

## INSTALLATION OPTIONS




**COLOUR**





Grey	Black
Glass	Glass

## DIAL AND HANDLE FAMILY


## HANDLELESS FAMILY

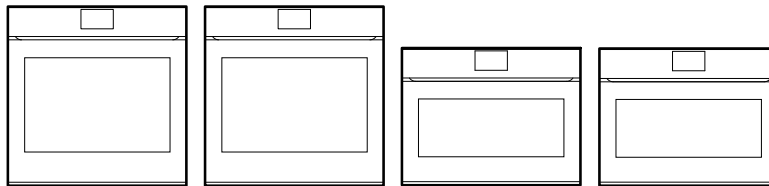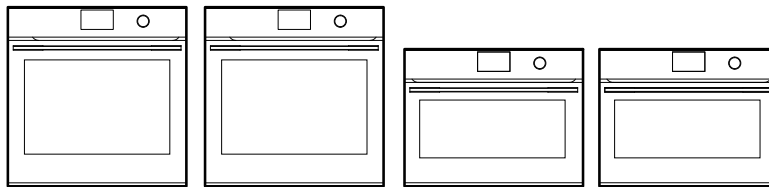

\*Note: Warming Drawer Tall only available in Black Glass finish




### Installation in wall

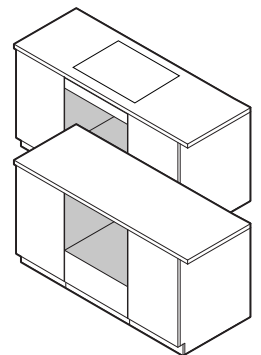


Installation  
under-bench

STACKED INSTALLATION

Stack Height  
1060mm




Stack Height  
1210mm

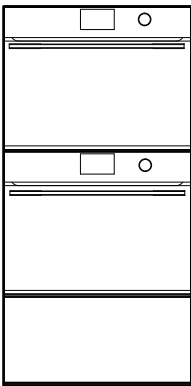


ROW INSTALLATION

Stack Height  
600mm

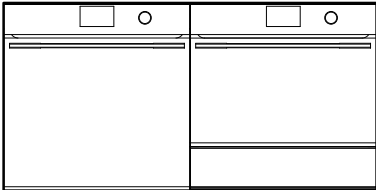


Stack Height  
600mm

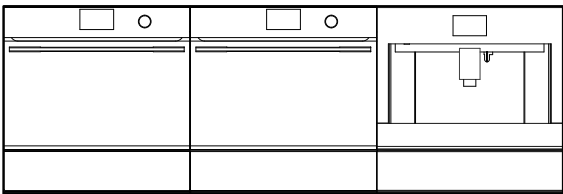


GRID INSTALLATION

Stack Height  
1060mm

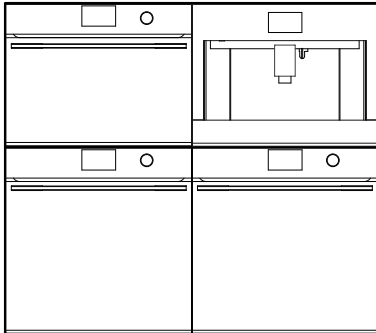

Stack Height  
1200mm

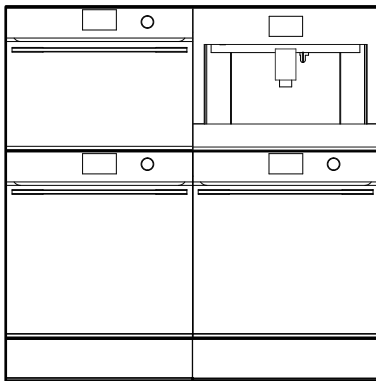

















CONSIDERATIONS

Different configurations possible,  
considerations are height,  
colour, dial and handle or handleless.

Note: Stack Height is overall product height with minimum clearances above appliance front panel to upper cabinetry front panel or appliance.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

	FRONT ELEVATION			SIDE ELEVATION				
								
								
	VACUUM SEAL DRAWER	WARMING DRAWER	WARMING DRAWER TALL	BUILT-IN COFFEE MAKER	COMBINATION MICROWAVE OVEN	COMBINATION STEAM OVEN	COMBINATION STEAM OVEN	OVEN
Series	Series 9	Series 9	Series 9	Series 9	Series 9	Series 9	Series 11	Series 9
Model Codes Black Glass	VB60SMB1-SET	WB60SMB1-SET	WB60SMTB1-SET	EB60MSB1	OM60NMTDB1	OS60NMTDB1	OS60SMTDB1	OB60SMPTDB1
Model Codes Grey Glass	VB60SMG1-SET	WB60SMG1-SET	-	EB60MSG1	OM60NMTDG1	OS60NMTDG1	OS60SMTDG1	OB60SMPTDG1
Interface	-	-	-	4.3" Touchscreen	5" Touchscreen	5" Touchscreen	5" Touchscreen	5" Touchscreen
Overall Product Heights	140mm	140mm	290mm	458mm	458mm	458mm	598mm	598mm
Front Panel Thickness	20mm	20mm	20mm	20mm	20mm	20mm	20mm	20mm

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

## SPECIFICATION GUIDE



OB60SMPTDB1



OB60SMPTDG1

OVERVIEW

Designed to fit seamlessly into any kitchen with Minimal styling, this 60cm oven features a generous 85L total capacity. Achieve perfect results with 16 oven functions, plus a Wireless Temperature Sensor\* for monitoring cooking in real time. Beautiful to use, the large 5” touchscreen interface features simple and intuitive guided cooking, while Pyrolytic self-cleaning breaks down grime and grease, to keep the oven pristine for the next use.

\*sold separately

PRODUCTS

**OB60SMPTDB1** - Black Glass  
Oven, 60cm, 16 Function, Self-cleaning

**OB60SMPTDG1** - Grey Glass  
Oven, 60cm, 16 Function, Self-cleaning

SERIES & STYLE

Series 9  
Minimal

ACCESSORIES

- ① Full Extension Sliding Shelf
- ② Grill Rack
- ③ Smokeless Grill Tray
- ④ Roasting Dish
- ⑤ Step Down Wire Shelf

FEATURES

- ① Minimal style, designed to fit flush with cabinetry
- ② Generous 85L total capacity with six shelf positions
- ③ Intuitive, large 5” touchscreen display with illuminated dial
- ④ 16 oven functions including Air fry, Fan Bake, and Roast
- ⑤ Pyrolytic self-cleaning function breaks down food residue for an easy clean
- ⑥ Includes a Wired Temperature Sensor for real-time monitoring of cooking temperatures
- ⑦ Guided touchscreen cooking makes it simple to cook by food, function or recipe
- ⑧ Moisture control and even heat distribution thanks to ActiveVent and AeroTech™ technology
- ⑨ Automatic rapid pre-heat function for added convenience
- ⑩ Soft open and close door
- ⑪ Wi-Fi/Connected capability through the SmarthQ™ app

ACCESSORIES

- ⑤ Wired Temperature Sensor
- ⑥ Flat Brushed Baking Tray
- ⑦ Pyrolytic Proof Shelf Runners

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)





OS60SMTDB1



OS60SMTDG1

OVERVIEW

Experience the precise control, repeatability and certainty of steam with our flagship Combination Steam Oven. Harnessing all the advantages of AeroTech™ technology, the oven features 23 functions, including steam-only, convection-only, or a combination of both. A Wireless Temperature Sensor\* precisely monitors food in real time, while the intuitive interface and dial offer simple guided cooking, helping to ensure perfect results.

\*sold separately

PRODUCTS

**OS60SMTDB1** - Black Glass  
Combination Steam Oven, 60cm, 23 Function

**OS60SMTDG1** - Grey Glass  
Combination Steam Oven, 60cm, 23 Function

SERIES & STYLE

Series 11  
Minimal

ACCESSORIES

- ① Chromed Shelf Runners
- ② 2x Descale Solutions
- ③ Flat Brushed Baking Tray
- ④ 2x Full Extension Sliding Shelves
- ⑤ Grill Rack
- ⑥ Large Steam Dish

FEATURES

- ① Minimal style, designed to fit flush with cabinetry
- ② Generous 85L total capacity with six shelf positions
- ③ Intuitive, large 5" touchscreen display with illuminated dial
- ④ 23 oven functions including six steam-only functions
- ⑤ Moisture control and even heat distribution thanks to ActiveVent and AeroTech™ technology
- ⑥ Guided touchscreen cooking makes it simple to cook by food, function or recipe
- ⑦ Includes a Wired Temperature Sensor for real-time monitoring of cooking temperatures
- ⑧ Water tank capacity of 1.5L
- ⑨ Wi-Fi/Connected capability through the SmartHQ™ app

ACCESORIES

- ⑦ Step Down Wire Shelf
- ⑧ Large Perforated Steam Dish
- ⑨ Small Perforated Steam Dish
- ⑩ Roasting Dish
- ⑪ Smokeless Grill Tray
- ⑫ Wired Temperature Sensor

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)



OS60NMTDB1



OS60NMTDG1, paired with Warming Drawer WB60SMGI-SET

OVERVIEW

With timeless Minimal styling, the compact Combination Steam Oven is designed to fit seamlessly into any kitchen. It features 23 functions, including steam-only, convection-only, or a combination of both. Reduce the need for oils and fats with six standalone steam functions, perfect for creating flavourful and healthy restaurant-quality meals at home. Beautiful to use, the large 5” touchscreen interface has simple and intuitive guided cooking, helping to ensure perfect results.

PRODUCTS

**OS60NMTDB1** - Black Glass  
Combination Steam Oven, 60cm, 23 Function

**OS60NMTDG1** - Grey Glass  
Combination Steam Oven, 60cm, 23 Function

SERIES & STYLE

Series 9  
Minimal

FEATURES

- ① Minimal style, designed to fit flush with cabinetry
- ② 55L total capacity
- ③ Intuitive, large 5” touchscreen display with illuminated dial
- ④ 23 oven functions, including six steam-only functions
- ⑤ Includes a Wired Temperature Sensor for real-time monitoring of cooking temperatures
- ⑥ Guided touchscreen cooking makes it simple to cook by food, function or recipe
- ⑦ Moisture control and even heat distribution thanks to ActiveVent and AeroTech™ technology
- ⑧ Motorised control panel reveals large 1.5L water tank
- ⑨ Wi-Fi/Connected capability through the SmarthQ™ app

ACCESSORIES

- ① Chromed Shelf Runners
- ② Full Extension Sliding Shelf
- ③ 2x Descale Solutions
- ④ Flat Brushed Baking Tray
- ⑤ Grill Rack
- ⑥ Large Steam Dish
- ⑦ Wire Shelf
- ⑧ Large Perforated Steam Dish
- ⑨ Small Perforated Steam Dish
- ⑩ Roasting Dish
- ⑪ Wired Temperature Sensor

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)



OM60NMTDB1



OM60NMTDG1

OVERVIEW

With timeless Minimal styling, the Combination Microwave Oven is designed to fit seamlessly into any kitchen. A flexible appliance that pairs the speed of microwave cooking with oven technology, which can crisp and brown as it cooks. Featuring 22 cooking functions on an intuitive touch display for easy programming of desired cooking mode and duration. A Wired Temperature Sensor monitors cooking in real time for complete control.

PRODUCTS

**OM60NMTDB1** - Black Glass  
Combination Microwave Oven, 60cm, 22 Function

**OM60NMTDG1** - Grey Glass  
Combination Microwave Oven, 60cm, 22 Function

SERIES & STYLE

Series 9  
Minimal

ACCESSORIES

- ① Chromed Shelf Runners
- ② Glass Tray
- ③ Step Down Wire Shelf
- ④ Wire Shelf
- ⑤ Wired Temperature Sensor
- ⑥ Grill Rack

FEATURES

- ① Minimal style, designed to fit flush with cabinetry
- ② Compact size for smaller kitchens, and generous 49L capacity with 4 shelf positions to cook for everyday's needs
- ③ Intuitive, large 5" touchscreen display with illuminated dial
- ④ The benefits of both microwave and convection oven cooking in one
- ⑤ 22 cooking functions, including 14 traditional convection functions, 4 microwave-only functions, and 4 microwave combination functions
- ⑥ Guided touchscreen cooking makes it simple to cook by food and function
- ⑦ Includes a Wired Temperature Sensor for real-time monitoring of cooking temperatures
- ⑧ Inverter technology for fast and even heating, and quiet product operation
- ⑨ Wi-Fi/Connected capability through the SmarthQ™ app

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)



Built-in Coffee Maker EB60MSB1, paired with Warming Drawer WB60SMB1-SET



Built-in Coffee Maker EB60MSG1, paired with Warming Drawer WB60SMG1-SET

**OVERVIEW**

The Built-in Coffee Maker features a stylish finish and can be installed in multiple configurations to suit kitchen design and preference. With 13 beverage options, our Coffee Maker is designed to consistently pour delicious coffee – from Flat White to Latte or Americano. Favourite coffee styles are memorised for a fast brew with the push of a button. A programmable timer turns the Coffee Maker on at the ideal time each day, while the conical burr grinder delivers a consistent grind for a perfect coffee.

**PRODUCTS**

**EB60MSB1** - Black Glass  
Built-in Coffee Maker, 60cm

**EB60MSG1** - Grey Glass  
Built-in Coffee Maker, 60cm

**ACCESSORIES**

- ① Thermal milk jug (0.5L)
- ② Water filter
- ③ Coffee spoon
- ④ Extractable steam outlet
- ⑤ Descaling agent bottle
- ⑥ Telescopic runners

**FEATURES**

- ① Designed to pair perfectly with 60cm ovens and companion products
- ② Install in multiple configurations to suit your kitchen design
- ③ Intuitive touch display
- ④ 13 functions to suit any taste and selection – from Espresso to Latte
- ⑤ Programmable timer turns on the Coffee Maker at the ideal time each day
- ⑥ Favourite coffee types are memorised and stored in custom profiles
- ⑦ Stainless steel conical burr grinder with 13 coarseness positions
- ⑧ 15 bar pump pressure
- ⑩ Self-cleaning function and easy to empty coffee grounds container and drip tray
- ⑪ 2.4L water tank capacity

**SERIES & STYLE**

Series 9  
Minimal

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)



Warming Drawer WB60SMTB1-SET, paired with Steam Oven OS60NMTDB1

OVERVIEW

Designed to complement our Minimal style ovens, these warming drawers are handle-free, and push-to-open for a coherent, considered look. Beautiful to use, with capacitive touch controls and six tailored functions for warming, proofing, dehydrating and slow cook. Pair with other companion products to create a kitchen suite for every need.

PRODUCTS

**WB60SMTB1-SET** - Black Glass  
Warming Drawer, 60cm, Tall, Panel Ready\*

\*This model comes with an accessory door panel, and is not suitable for use with a custom door panel

SERIES & STYLE

Series 9  
Minimal

FEATURES

- ① Seamless pairing with our Minimal style ovens and other companion products
- ② Push-to-open drawer
- ③ Easy-to-use capacitive touch controls
- ④ Automatic timing and switch-off functionality
- ⑤ Easy-to-clean, smooth-glass base
- ⑥ Room for 16 standard-sized place settings
- ⑦ Versatile with six tailored programmes for warming, proofing, dehydrating and slow cook

ACCESSORIES

- ① Accessory rack for optimising space

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)



Warming Drawer WB60SMB1-SET, paired with Steam Oven OS60NMTDB1



Warming Drawer WB60SMG1-SET, paired with Steam Oven OS60NMTDG1

**OVERVIEW**

Designed to complement our Minimal style ovens, these warming drawers are handle-free, and push-to-open for a coherent, considered look. Beautiful to use, with capacitive touch controls and six tailored functions for warming, proofing, dehydrating and slow cook. Pair with other companion products to create a kitchen suite for every need.

**PRODUCTS**

**WB60SMB1-SET** - Black Glass  
Warming Drawer, 60cm, Panel Ready\*

**WB60SMG1-SET** - Grey Glass  
Warming Drawer, 60cm, Panel Ready\*

\*This model comes with an accessory door panel, and is not suitable for use with a custom door panel

**SERIES & STYLE**

Series 9  
Minimal

**FEATURES**

- ① Seamless pairing with our Minimal style ovens and other companion products
- ② Push-to-open drawer
- ③ Easy-to-use capacitive touch controls
- ④ Easy-to-clean, smooth-glass base
- ⑤ Room for six standard-sized place settings
- ⑥ Automatic timing, switch-off functionality
- ⑦ Interior LED lighting
- ⑧ Versatile with six tailored programmes for warming, proofing, dehydrating and slow cook

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)



Vacuum Seal Drawer VB60SMB1-SET, paired with Steam Oven OS60NMTDB1



Vacuum Seal Drawer VB60SMG1-SET, paired with Steam Oven OS60NMTDG1

**OVERVIEW**

Designed to match our Minimal style appliances, the Vacuum Seal Drawer is the ideal companion for our Combination Steam Oven. Prepares food for sous vide cooking, or vacuum sealing for marinating, food storage and portioning and resealing. Beautiful to use, with capacitive touch controls, these drawers deliver the performance to achieve perfect results.

**PRODUCTS**

**VB60SMB1-SET** - Black Glass  
Vacuum Seal Drawer, 60cm, Panel Ready\*

**VB60SMG1-SET** - Grey Glass  
Vacuum Seal Drawer, 60cm, Panel Ready\*

\*This model comes with an accessory door panel, and is not suitable for use with a custom door panel

**SERIES & STYLE**

Series 9  
Minimal


**FEATURES**

- ① Seamless pairing with our Minimal style ovens and other companion products
- ② Push-to-open drawer
- ③ Three levels of vacuum and heat sealing
- ④ Easy-to-clean base
- ⑤ Easy-to-use capacitive touch controls
- ⑥ Vacuum sealing for easy food portioning, marinating, storage and extended shelf life, or re-sealing
- ⑦ Effortless preparation for sous vide cooking
- ⑧ Maintenance and moisture indicator

**ACCESSORIES**

- ① External vacuuming accessory kit
- ② Large BPA free vacuum seal bags (50 bags, part 793034)
- ③ Small BPA-free vacuum seal bags (50 bags, part 793033)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

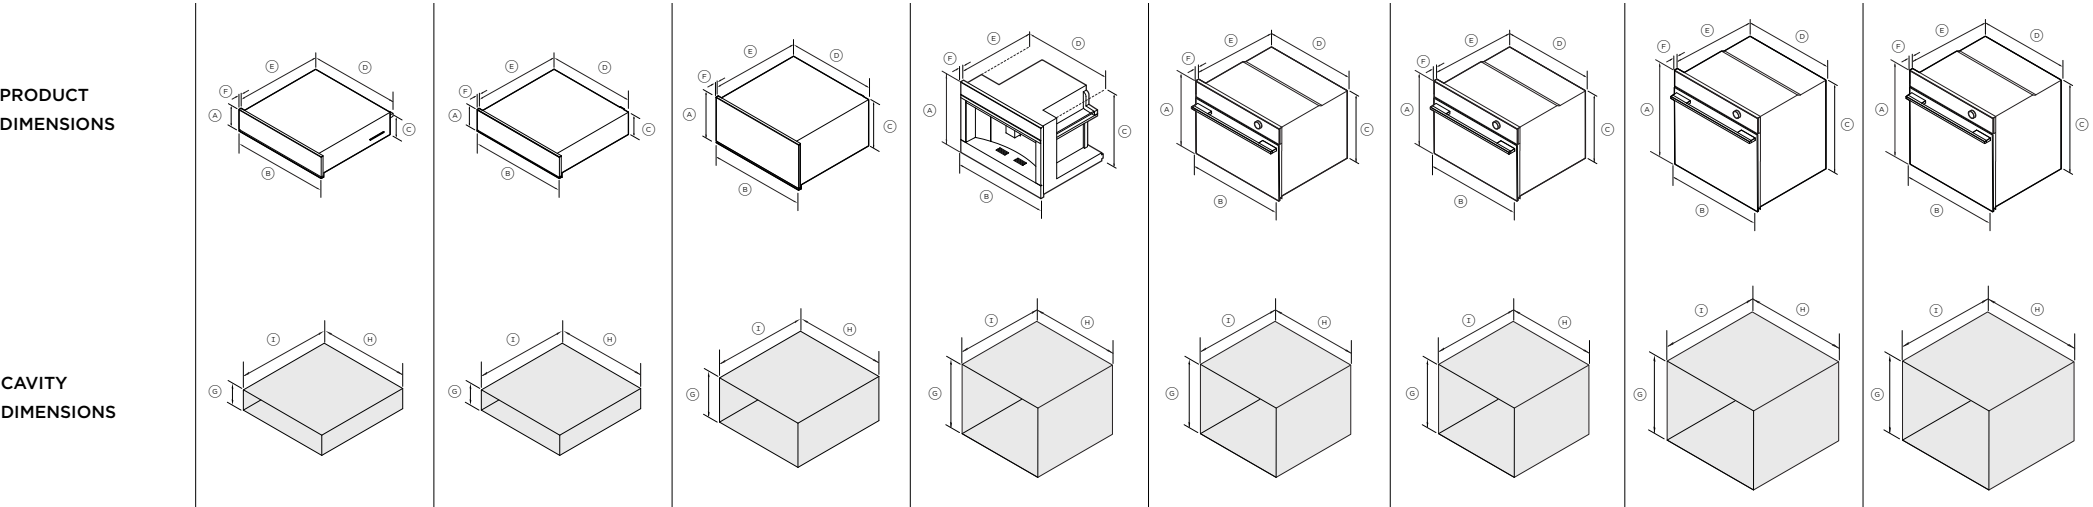


	VACUUM SEAL DRAWER VB60SMB1-SET VB60SMG1-SET	WARMING DRAWER WB60SMB1-SET WB60SMG1-SET	WARMING DRAWER TALL WB60SMTB1-SET	BUILT-IN COFFEE MAKER EB60MSB1 EB60MSG1	COMBINATION MICROWAVE OVEN OM60NMTDB1 OM60NMTDGI	COMBINATION STEAM OVEN OS60NMTDB1 OS60NMTDGI	COMBINATION STEAM OVEN OS60SMTDB1 OS60SMTDGI	OVEN OB60SMPTDB1 OB60SMPTDGI
<b>PRODUCT DIMENSIONS</b>								
A Overall height	140mm	140mm	290mm	458mm	458mm	458mm	598mm	598mm
B Overall width	596mm	596mm	596mm	596mm	596mm	596mm	596mm	596mm
C Chassis height	140mm	140mm	290mm	445mm	435mm	435mm	575mm	575mm
D Chassis width	556mm**	543mm	543mm	560mm	556mm	556mm	556mm	556mm
E Chassis depth	545mm	547mm	547mm	460mm	545mm	545mm	545mm	545mm
F Front panel thickness	20mm	20mm	20mm	20mm	20mm	20mm	20mm	20mm
Depth of oven door fully open	-	-	-	-	320mm*	320mm*	460mm*	460mm*
<b>CAVITY DIMENSIONS</b>								
G Minimum inside height of cavity	142mm**	142mm**	292mm**	450mm	440mm	440mm	580mm	580mm
H Minimum inside width of cavity	560mm	560mm	560mm	560mm	560mm	560mm	560mm	560mm
I Minimum inside depth of cavity	550mm	550mm	550mm	545mm*	550mm*	550mm	550mm	550mm
Recommended cabinet width	600mm	600mm	600mm	600mm	600mm	600mm	600mm	600mm

\*Requires ventilation at the rear of the cavity  
\*\*Standalone installation measurement can be installed with appliance on top. Drawers can fully support 60cm Fisher & Paykel wall oven, without adding shelf in between

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)



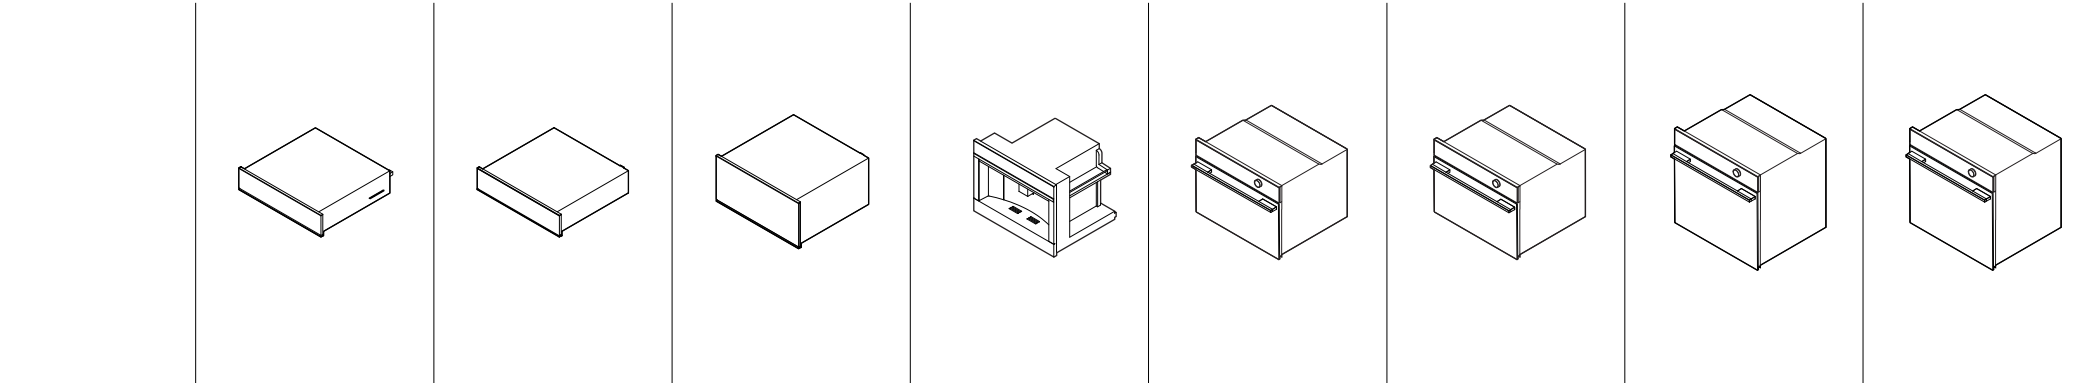

	VACUUM SEAL DRAWER VB60SMB1-SET VB60SMG1-SET	WARMING DRAWER WB60SMB1-SET WB60SMG1-SET	WARMING DRAWER TALL WB60SMTB1-SET	BUILT-IN COFFEE MAKER EB60MSB1 EB60MSG1	COMBINATION MICROWAVE OVEN OM60NMMTDB1 OM60NMTDG1	COMBINATION STEAM OVEN OS60NMNTDB1 OS60NMNTDG1	COMBINATION STEAM OVEN OS60SMTDB1 OS60SMTDG1	OVEN OB60SMPTDB1 OB60SMPTDG1
POWER REQUIREMENTS								
Supply	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz
Service	10 A	10 A	10 A	10 A	20 A	20 A	20 A	20 A
Connection	Flex cord 1800mm	Flex cord 1800mm	Flex cord 1800mm	Flex cord 1700mm	Hard wired	Hard wired	Hard wired	Hard wired
WEIGHT								
Packaged	42kg	22kg	25kg	39kg	46kg	52kg	65kg	44kg
Unpackaged	35kg	18kg	20kg	29kg	41kg	39kg	46kg	38kg
CAPACITY								
Total oven	-	-	-	-	49L	55L	85L	85L
Total water tank	-	-	-	2.4L	-	1.4L	1.4L	-

SERVICES


For more infomation on cord length, water supply and electrical requirements, refer to the 'Services' section of this Planning Guide.

WATER


All Coffee Makers and Steam Ovens have internal water tanks which need to be filled manually. No external water supply is required.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)



## DATA SHEETS

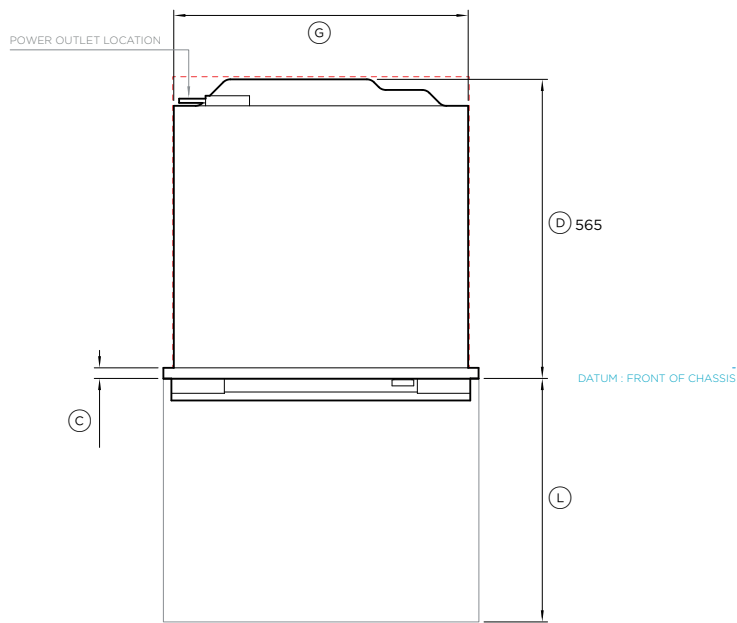

PLAN VIEW

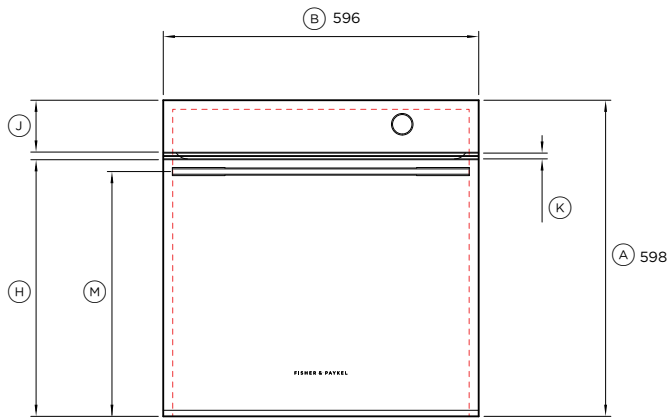

FRONT VIEW

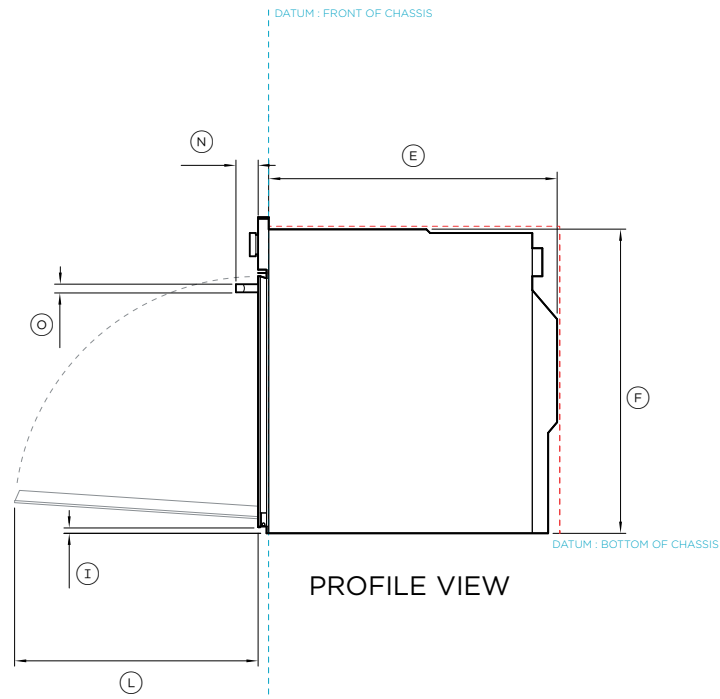

PROFILE VIEW

**Model no:**  
Oven, 60cm - OB60SMPTDB1, OB60SMPTDG1

Product Dimensions	mm
A Overall height of product	598
B Overall width of product	596
C Depth of control panel (excludes dial and handle)	20
D Depth of chassis and control panel (excludes dial and handle)	565
E Depth of chassis	545
F Height of chassis	575
G Width of chassis	556
H Height from bottom datum to top of oven door	487
I Height from bottom datum to bottom of door	12
J Height of control panel	100
K Gap between door and control panel	11
L Depth of door when open (measured from front of door)	460
M Height from bottom datum to centerline of handle	464
N Depth of handle (measured from front of door)	42
O Thickness of handle	16


Minimum Clearances - Flush Installation	mm
Minimum inside height of cavity	580
Minimum inside width of cavity	560
Minimum inside depth of cavity	550
Minimum clearances above oven control panel to upper cabinetry front panel or appliance	2
Minimum clearances between bottom of oven chassis to lower cabinetry front panel or appliance	2

Ensure a 5mm minimum clearance is maintained between the top of the oven chassis and the cabinetry. Ensure the oven is not bearing any weight from cabinetry or products installed above.


IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM  
INDICATES CABINETRY CLEARANCES


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit [fisherpaykel.com](https://www.fisherpaykel.com)

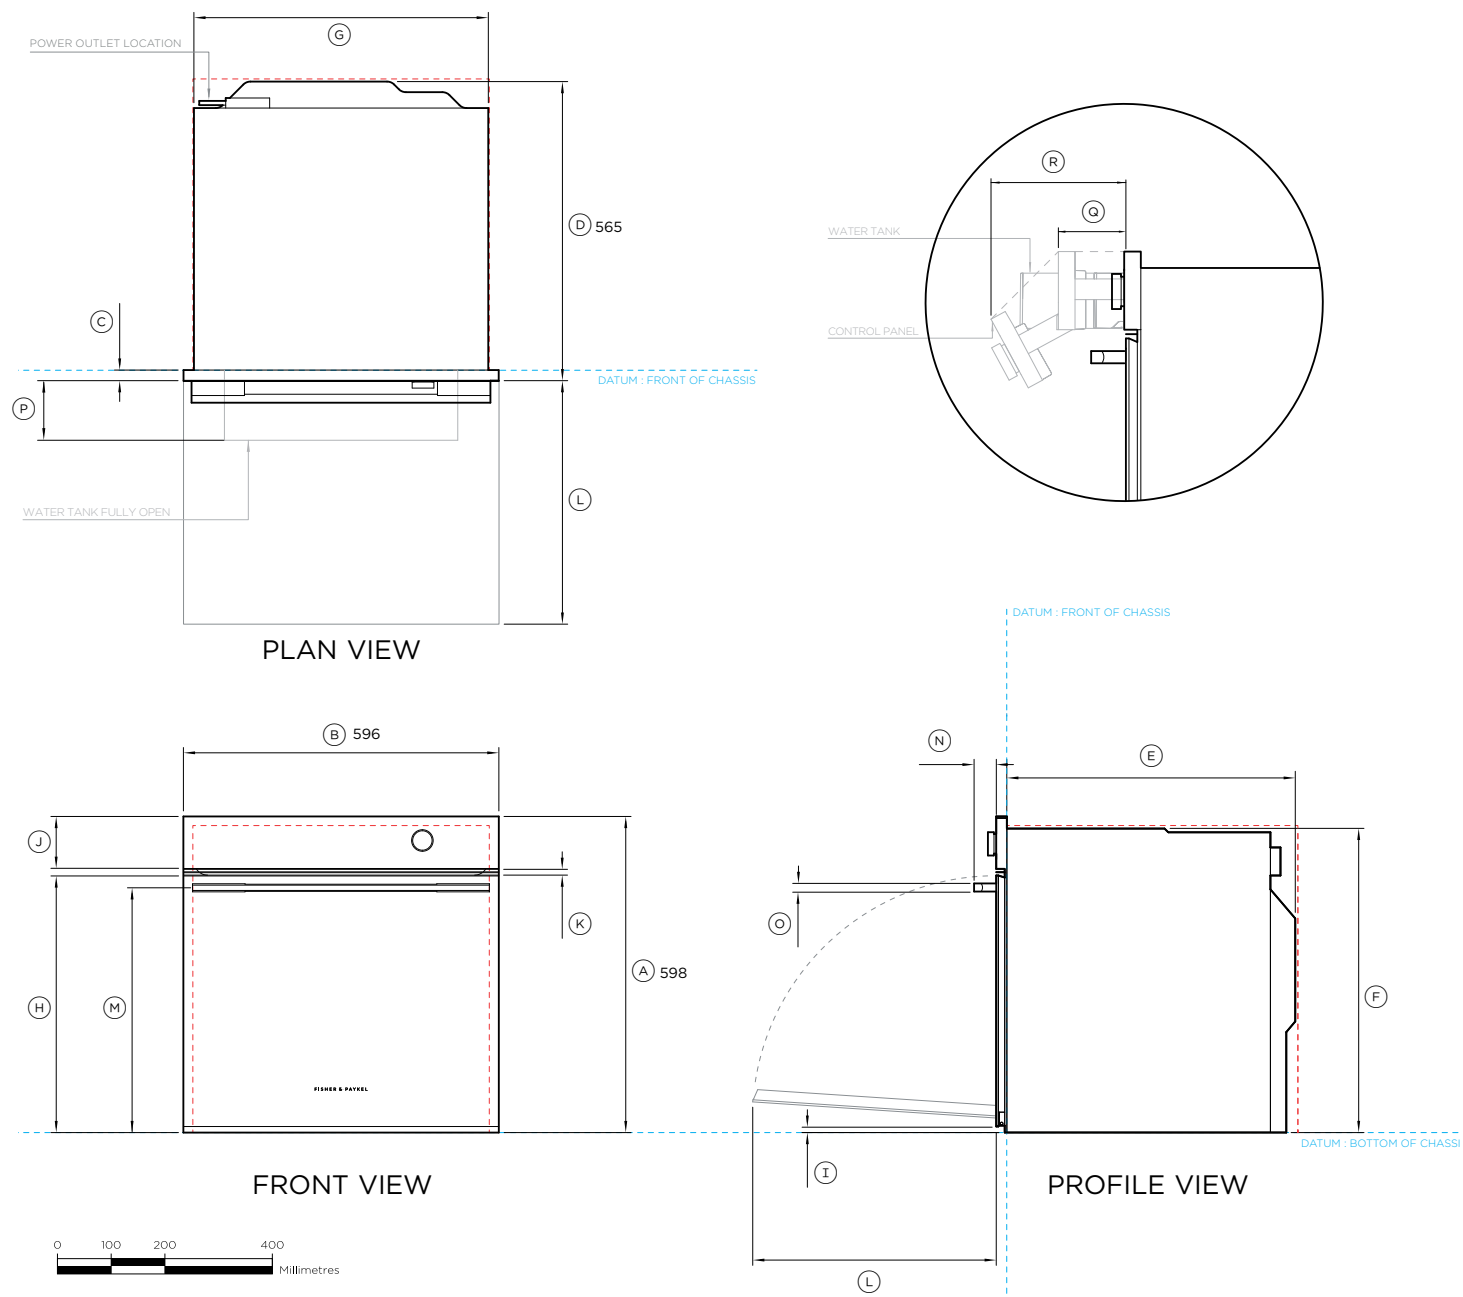


<b>Model no:</b> Combination Steam Oven, 60cm - OS60SMTDB1, OS60SMTDG1	
<b>Product Dimensions</b>	<b>mm</b>
A Overall height of product	598
B Overall width of product	596
C Depth of control panel (excludes dial and handle)	20
D Depth of chassis and control panel (excludes dial and handle)	565
E Depth of chassis	545
F Height of chassis	575
G Width of chassis	556
H Height from bottom datum to top of oven door	487
I Height from bottom datum to bottom of door	12
J Height of control panel	100
K Gap between door and control panel	11
L Depth of door when open (measured from front of door)	460
M Height from bottom datum to centerline of handle	464
N Depth of handle (measured from front of door)	42
O Thickness of handle	16
P Control panel fully open (measured from front of door)	170
Q Control panel half open (measured from front of door)	84
R Water tank carriage fully open (measured from front of door)	133
<b>Minimum Clearances - Flush Installation</b>	
<b>mm</b>	
Minimum inside height of cavity	580
Minimum inside width of cavity	560
Minimum inside depth of cavity	550
Minimum clearances above oven control panel to upper cabinetry front panel or appliance	2
Minimum clearances between bottom of oven chassis to lower cabinetry front panel or appliance	2
Ensure a 5mm minimum clearance is maintained between the top of the oven chassis and the cabinetry. Ensure the oven is not bearing any weight from cabinetry or products installed above.	
IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.	
INDICATES PRODUCT DATUM -----	
INDICATES CABINETRY CLEARANCES -----	
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit <a href="https://www.fisherpaykel.com">fisherpaykel.com</a>	

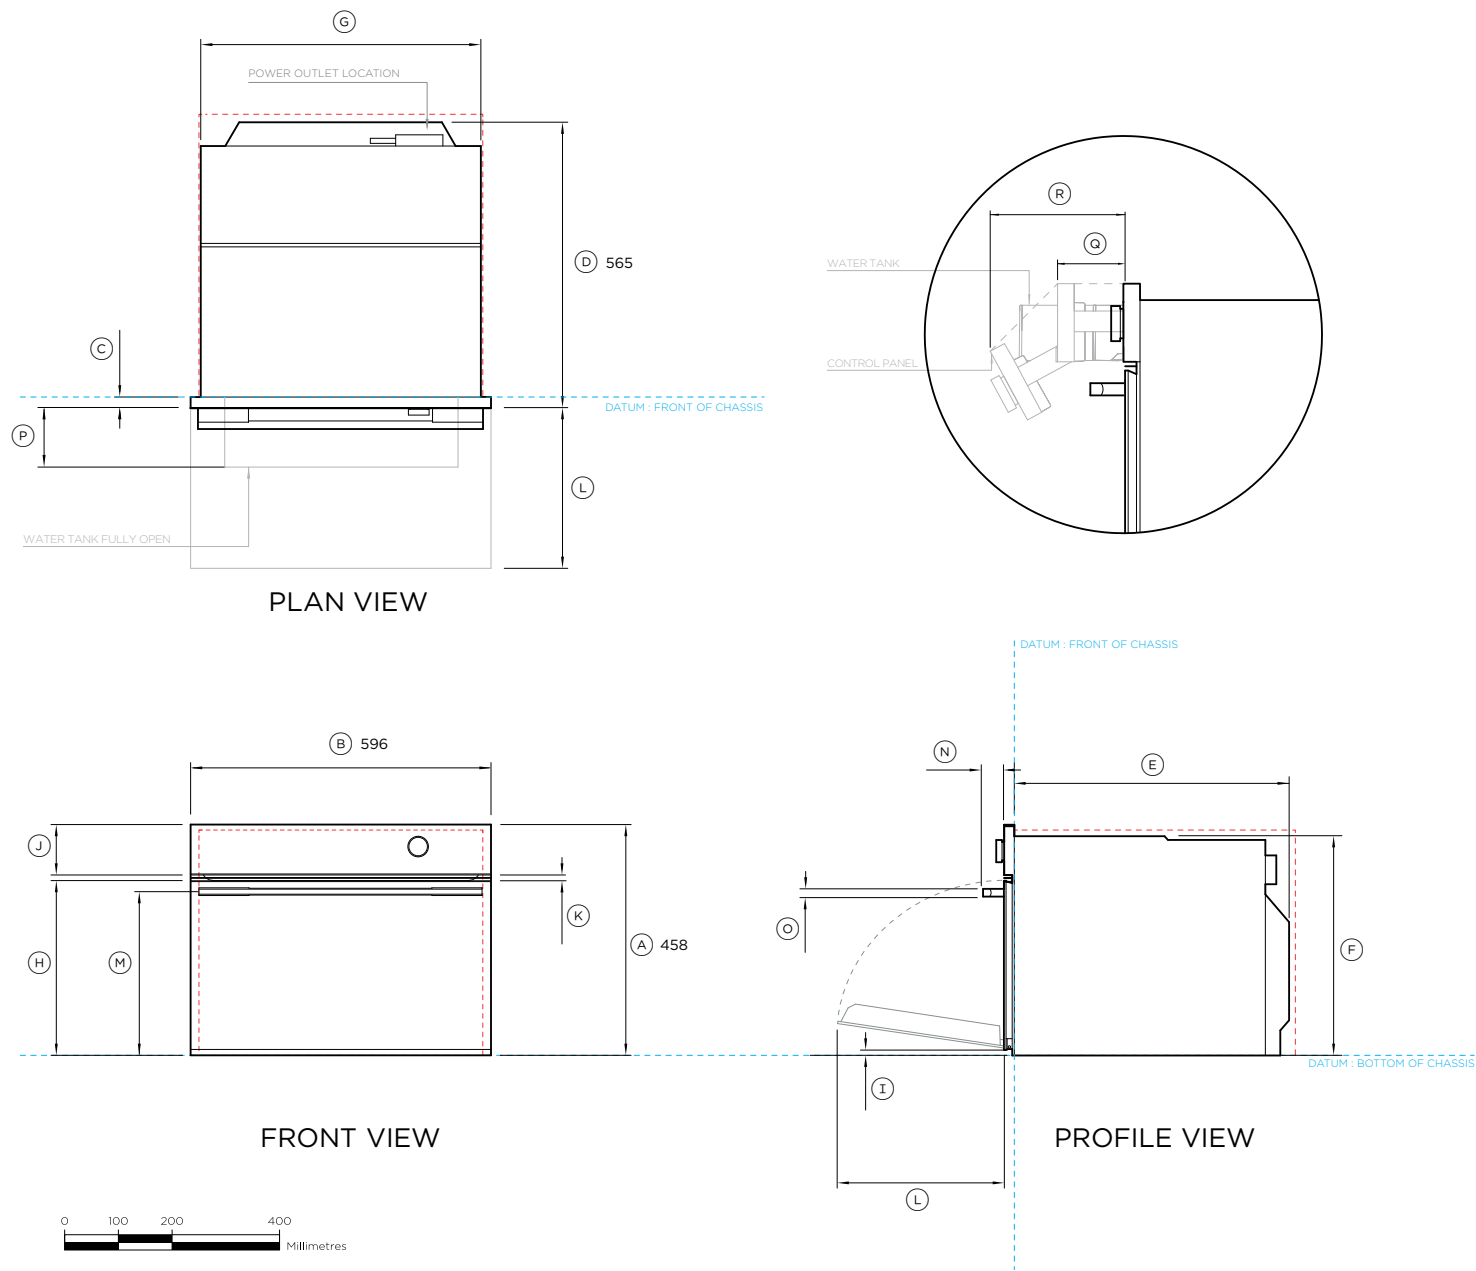

<b>Model no:</b> Combination Steam Oven, 60cm - OS60NMTDB1, OS60NMTDG1	
<b>Product Dimensions</b>	<b>mm</b>
A Overall height of product	458
B Overall width of product	596
C Depth of control panel (excludes dial and handle)	20
D Depth of chassis and control panel (excludes dial and handle)	565
E Depth of chassis	545
F Height of chassis	435
G Width of chassis	556
H Height from bottom datum to top of oven door	347
I Height from bottom datum to bottom of door	12
J Height of control panel	100
K Gap between door and control panel	11
L Depth of door when open (measured from front of door)	320
M Height from bottom datum to centerline of handle	324
N Depth of handle (measured from front of door)	42
O Thickness of handle	16
P Control panel fully open (measured from front of door)	170
Q Control panel half open (measured from front of door)	84
R Water tank carriage fully open (measured from front of door)	133
<b>Minimum Clearances - Flush Installation</b>	<b>mm</b>
Minimum inside height of cavity	440
Minimum inside width of cavity	560
Minimum inside depth of cavity	550
Minimum clearances above oven control panel to upper cabinetry front panel or appliance	2
Minimum clearances between bottom of oven chassis to lower cabinetry front panel or appliance	2
Ensure a 5mm minimum clearance is maintained between the top of the oven chassis and the cabinetry. Ensure the oven is not bearing any weight from cabinetry or products installed above.	
IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.	
INDICATES PRODUCT DATUM -----	
INDICATES CABINETRY CLEARANCES -----	
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit <a href="https://fisherpaykel.com">fisherpaykel.com</a>	

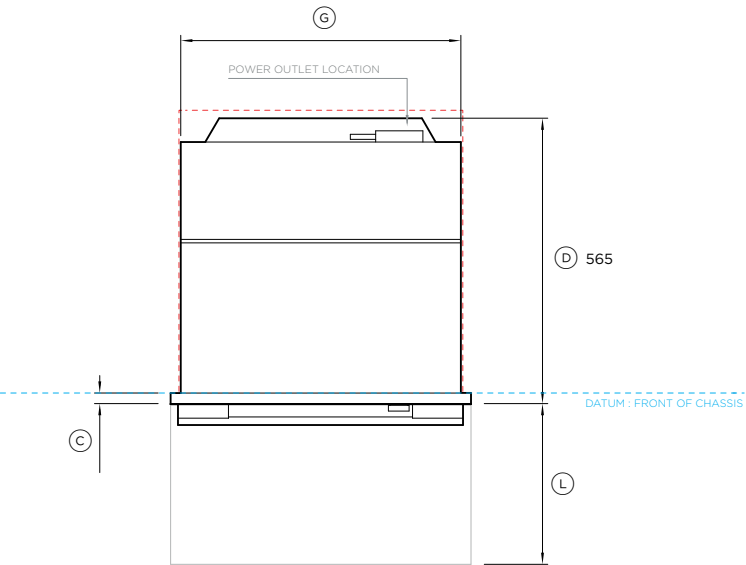

PLAN VIEW

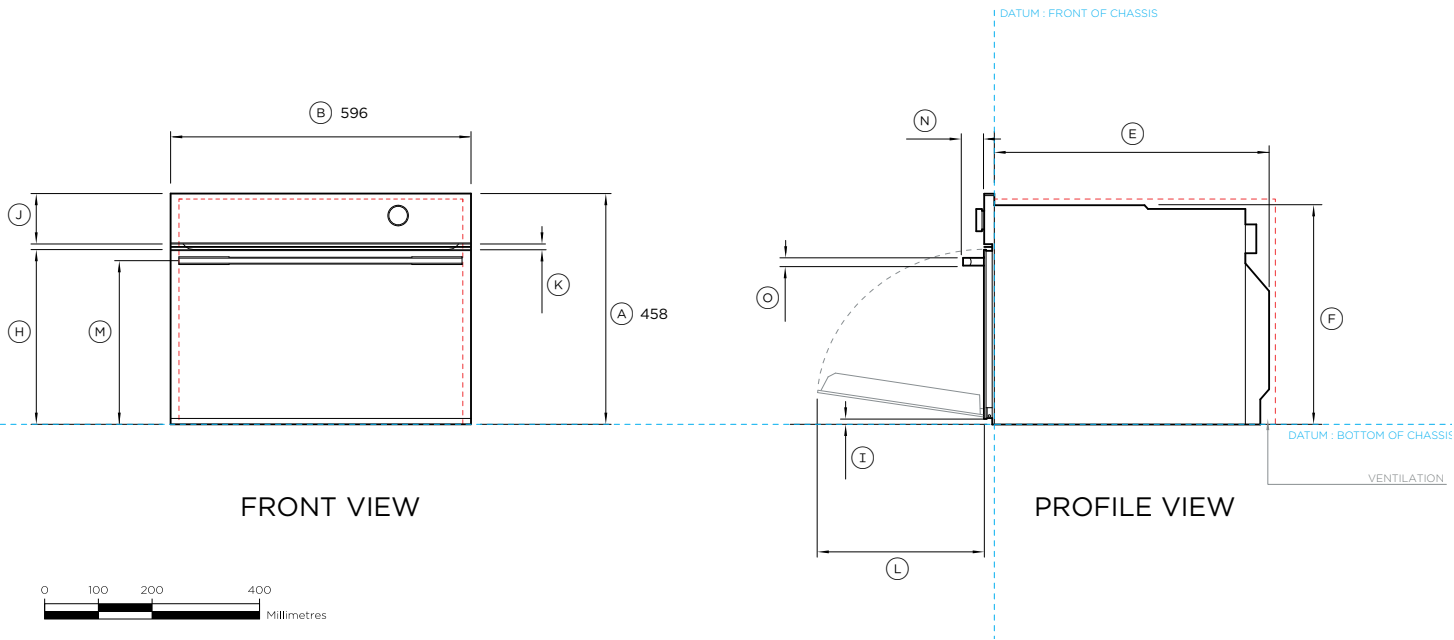

FRONT VIEW

PROFILE VIEW

**Model no:**  
Combination Microwave Oven, 60cm - OM60NMTDB1, OM60NMTDG1

Product Dimensions	mm
A Overall height of product	458
B Overall width of product	596
C Depth of control panel (excludes dial and handle)	20
D Depth of chassis and control panel (excludes dial and handle)	565
E Depth of chassis	545
F Height of chassis	435
G Width of chassis	556
H Height from bottom datum to top of oven door	347
I Height from bottom datum to bottom of door	12
J Height of control panel	100
K Gap between door and control panel	11
L Depth of door when open (measured from front of door)	320
M Height from bottom datum to centerline of handle	324
N Depth of handle (measured from front of door)	42
O Thickness of handle	16

Minimum Clearances - Flush Installation	mm
Minimum inside height of cavity	440
Minimum inside width of cavity	560
Minimum inside depth of cavity	550
Rear ventilation air vent depth*	50
Rear ventilation air vent width*	560
Minimum clearances above oven control panel to upper cabinetry front panel or appliance	2
Minimum clearances between bottom of oven chassis to lower cabinetry front panel or appliance	2


\*A rear ventilation air vent totalling 280cm<sup>2</sup> is required. The air vent must be located at the rear of the cabinet, it can be positioned at the base, sides, back or top of the cavity.

Ensure a 5mm minimum clearance is maintained between the top of the oven chassis and the cabinetry. Ensure the oven is not bearing any weight from cabinetry or products installed above.

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit [fisherpaykel.com](https://fisherpaykel.com)

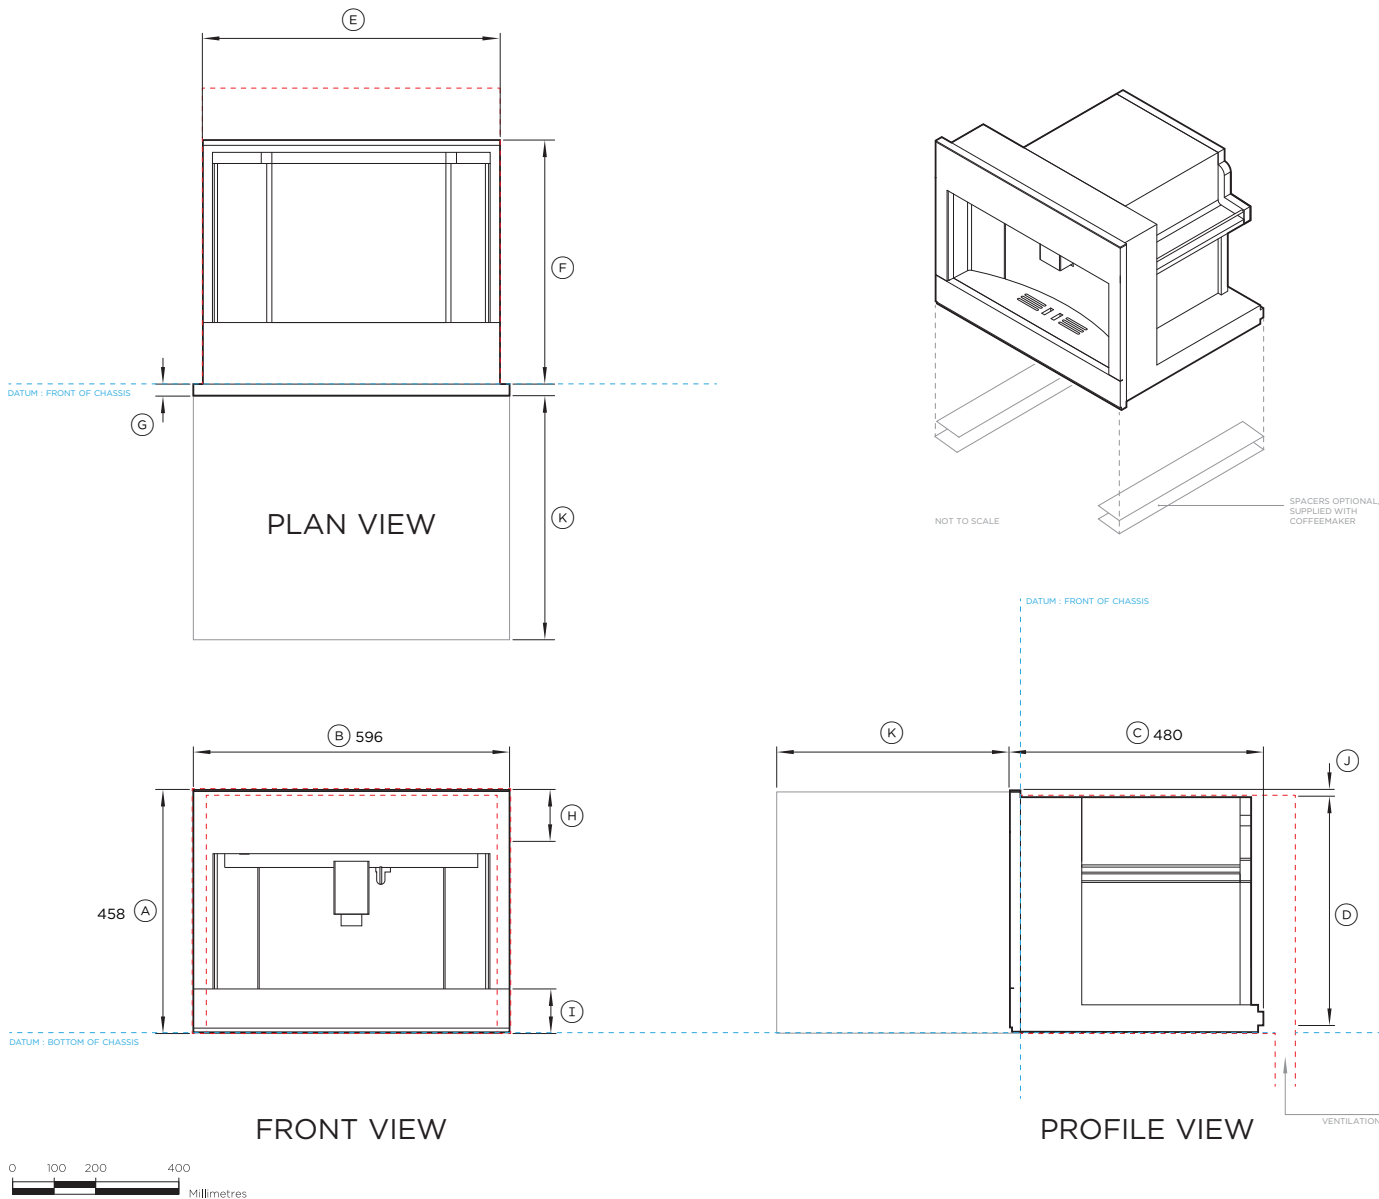

<b>Model no:</b>	
Built-in Coffee Maker, 60cm - EB60MSB1, EB60MSG1	
<b>Product Dimensions</b>	
<b>mm</b>	
A Overall height of product	458
B Overall width of product	596
C Overall depth of product (excludes front metal trim)	480
D Height of chassis	445
E Width of chassis	560
F Depth of chassis	460
G Depth of coffee maker front frame and control panel (excludes front metal trim)	20
H Height of control panel	100
I Height of horizontal lower section from bottom datum	83
J Stepdown from control panel to chassis	13
K Extent coffee maker pulls out	435


<b>Minimum Clearances - Flush Installation</b>	
<b>mm</b>	
Minimum inside height of cavity	450
Minimum inside width of cavity	560
Minimum inside depth of cavity from front datum	545
Overall height of cabinetry	460
Overall width of cabinetry	600
Rear ventilation air vent depth*	50
Rear ventilation air vent width*	560
Minimum clearances above built-in coffee maker control panel to upper cabinetry front panel or appliance	2
Minimum clearances between bottom of coffee maker rails to lower cabinetry front panel or appliance	2

\*A rear ventilation air vent totalling 280cm<sup>2</sup> is required. The air vent must be located at the rear of cabinet. It can be positioned at the base, sides, back or top of the cavity.

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit [fisherpaykel.com](https://fisherpaykel.com)

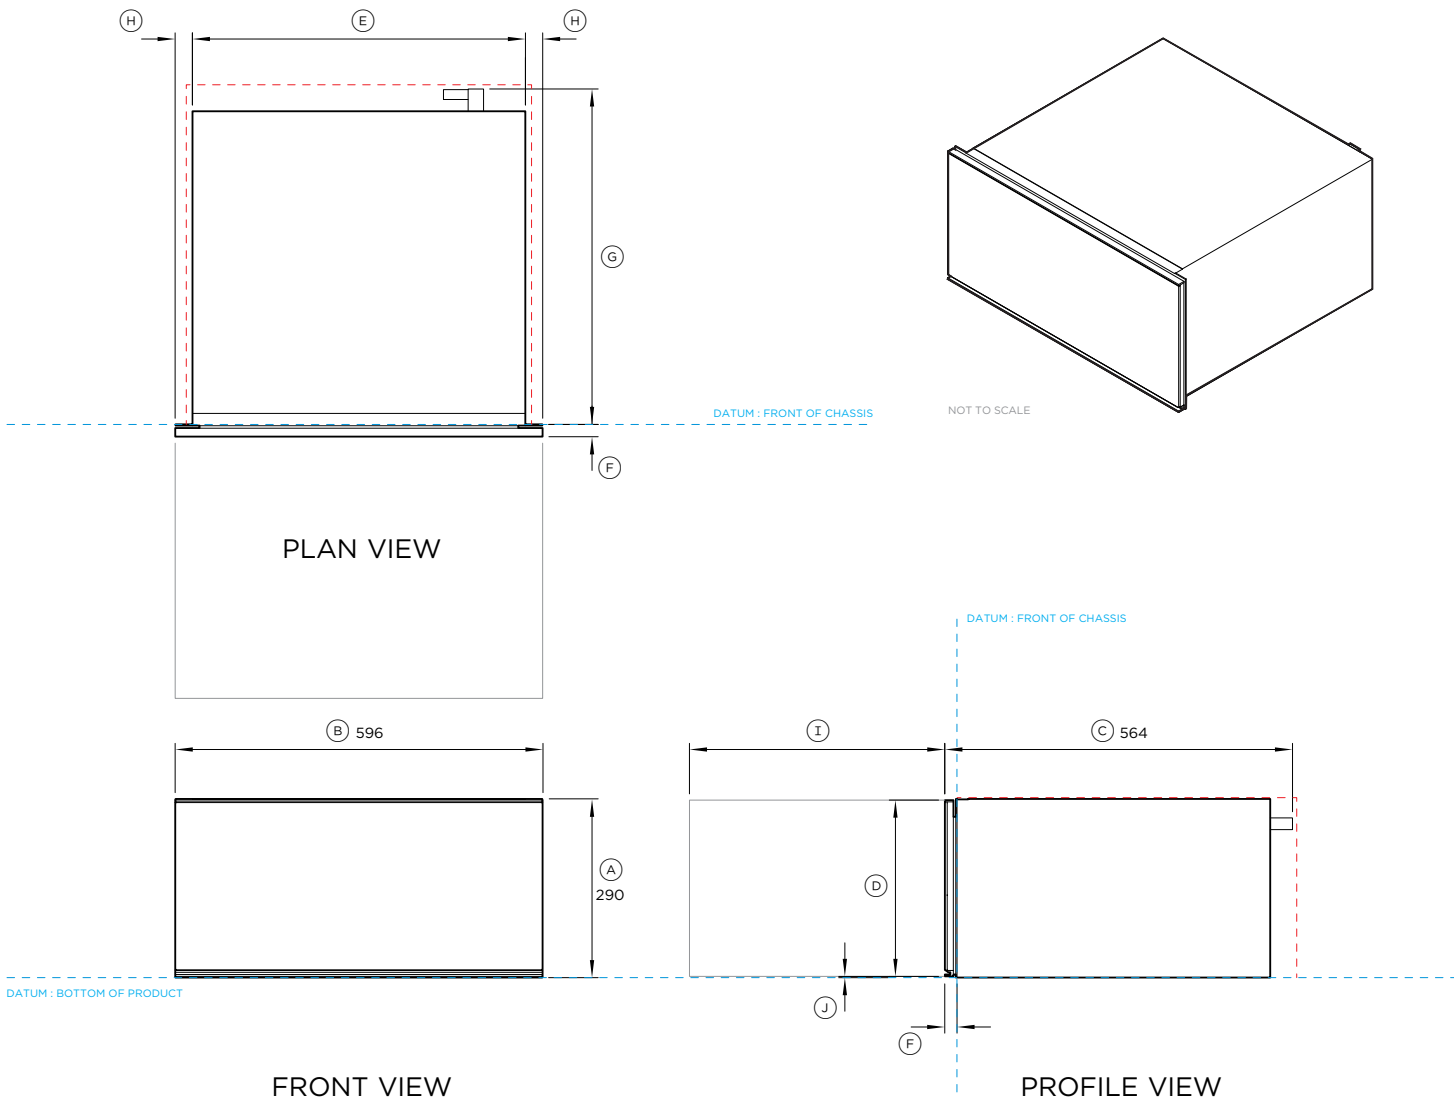

**Model no:**

Warming Drawer, 60cm, Tall - WB60SMTB1-SET

**Product Dimensions**

	mm
A Overall height of product	290
B Overall width of product	596
C Overall depth (incl. front panel & power plug)	564
D Height of drawer front panel	286
E Width of chassis	543
F Depth of drawer front panel and flange	20
G Depth of chassis (includes power plug, excludes flange)	547
H Distance from side of chassis to side of drawer front	36
I Depth of open drawer (measured from front of drawer panel)	414
J Height from bottom of chassis to bottom of front panel	2

**Dimension Clearances - Flush Installation**

	mm
Minimum inside height of cavity	292
Minimum inside width of cavity	560
Minimum inside depth of cavity	550
Overall width of cabinetry	600
Minimum clearances above drawer front panel to upper cabinetry front panel or appliance*	4
Minimum clearances between bottom of drawer chassis to lower cabinetry front panel or appliance	2


\*Achieve a smaller gap between drawer front panel to upper cabinetry front panel by dropping cabinetry front panel down

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit [fisherpaykel.com](https://fisherpaykel.com)



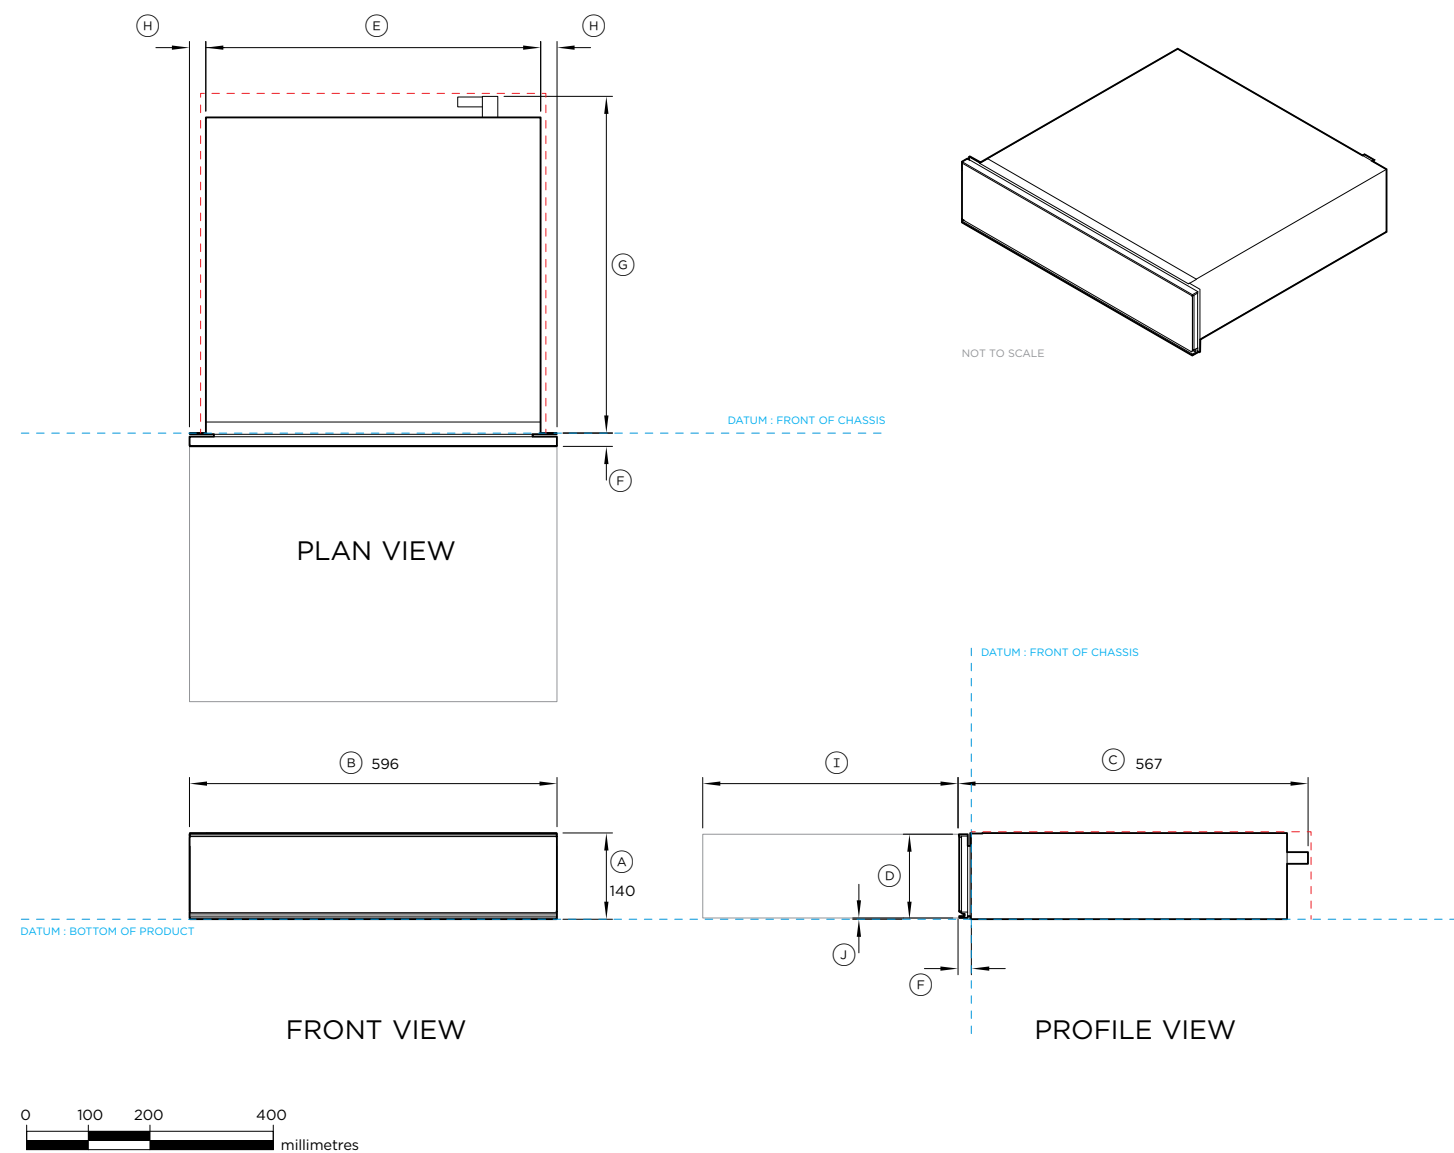

<b>Model no:</b>	
Warming Drawer, 60cm - WB60SMB1-SET, WB60SMG1-SET	
<b>Product Dimensions</b>	
	<b>mm</b>
(A) Overall height of product	140
(B) Overall width of product	596
(C) Overall depth (incl. front panel & power plug, excludes stainless cap)	567
(D) Height of drawer front panel	136
(E) Width of chassis	543
(F) Depth of drawer front panel and flange (excludes stainless cap)	20
(G) Depth of chassis (includes power plug, excludes flange)	547
(H) Distance from side of chassis to side of drawer front	36
(I) Depth of open drawer (measured from front of drawer panel)	414
(J) Height from bottom of chassis to bottom of front panel	2


<b>Dimension Clearances - Flush Installation</b>	
	<b>mm</b>
Minimum inside height of cavity	142
Minimum inside width of cavity	560
Minimum inside depth of cavity	550
Overall width of cabinetry	600
Minimum clearances above drawer front panel to upper cabinetry front panel or appliance*	4
Minimum clearances between bottom of drawer chassis to lower cabinetry front panel or appliance	2

\*Achieve a smaller gap between drawer front panel to upper cabinetry front panel by dropping cabinetry front panel down

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM -----  
INDICATES CABINETY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit [fisherpaykel.com](https://fisherpaykel.com)

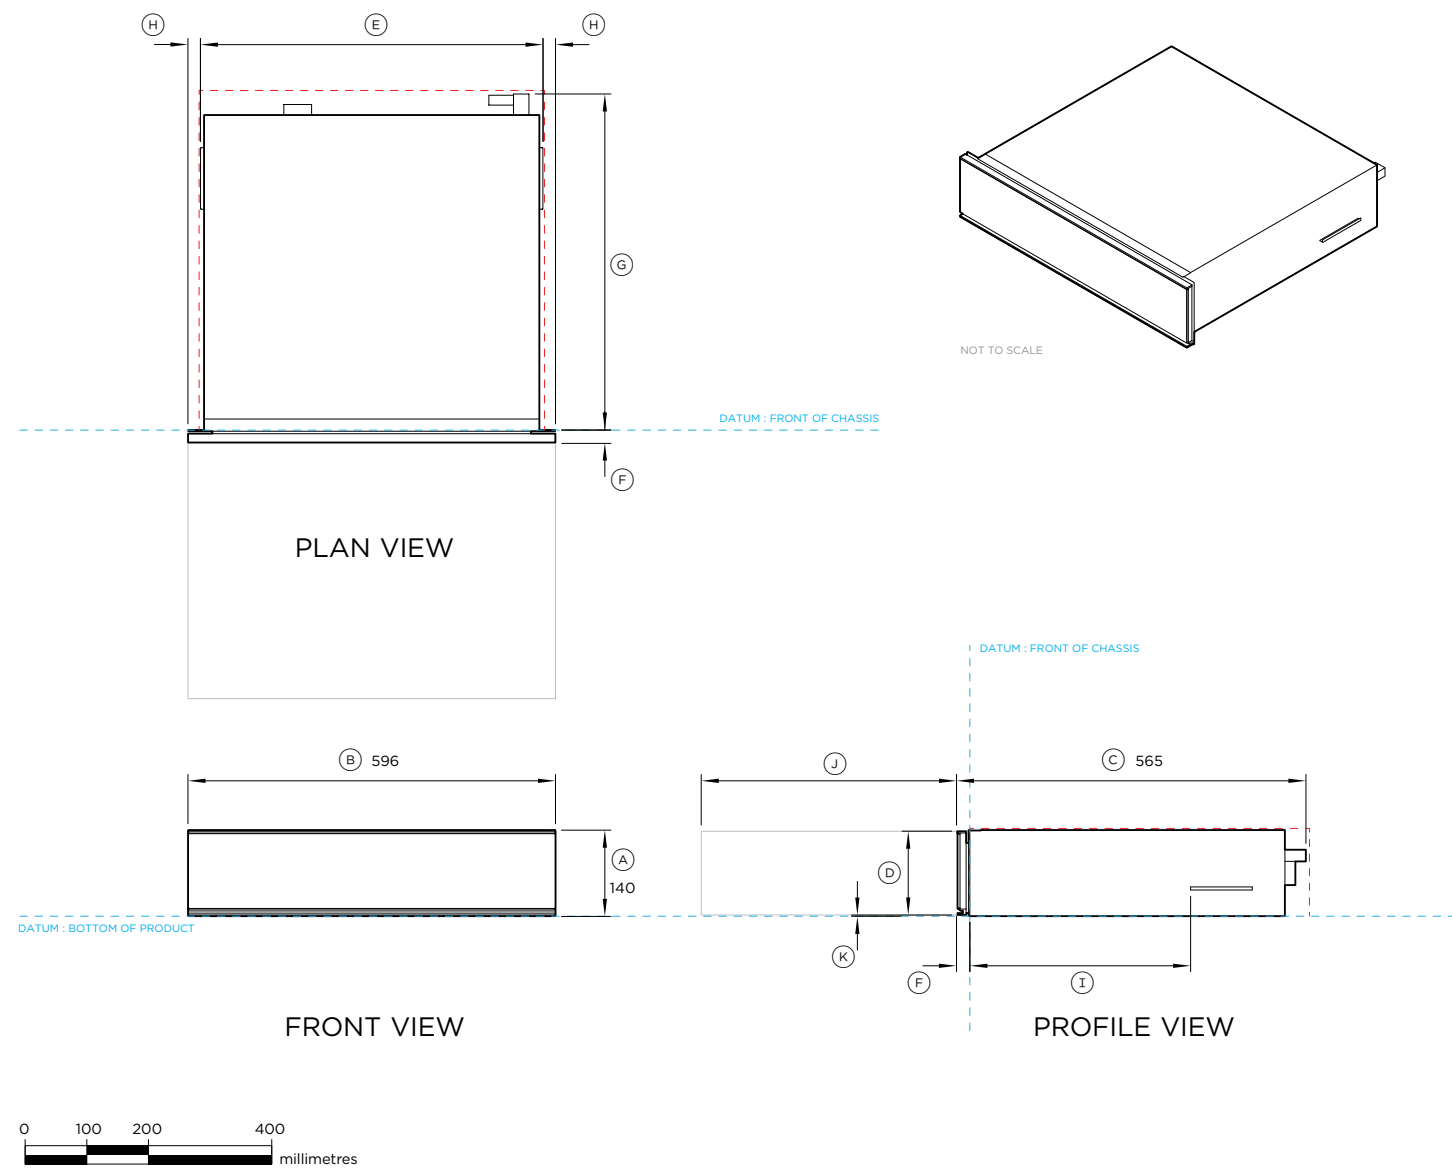

**Model no:**

Vacuum Seal Drawer - VB60SMB1-SET, VB60SMG1-SET

**Product Dimensions**

	mm
A Overall height of product	140
B Overall width of product	596
C Overall depth (incl. front panel & power plug)	565
D Height of drawer front panel	136
E Width of chassis (includes side brackets)	556
F Depth of drawer front panel and flange	20
G Depth of chassis (includes power plug, excludes flange)	545
H Distance from side bracket to side of drawer front	20
I Distance between flange and side bracket	358
J Depth of open drawer (measured from front of drawer panel)	414
K Height from bottom of chassis to bottom of front panel	2

**Dimension Clearances - Flush Installation**

	mm
Minimum inside height of cavity	142
Minimum inside width of cavity	560
Minimum inside depth of cavity	550
Overall width of cabinetry	600
Minimum clearances above drawer front panel to upper cabinetry front panel or appliance*	4
Minimum clearances between bottom of drawer chassis to lower cabinetry front panel or appliance	2

\*Achieve a smaller gap between drawer front panel to upper cabinetry front panel by dropping cabinetry front panel down

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit [fisherpaykel.com](https://fisherpaykel.com)

## PLANNING CONSIDERATIONS

**DIVIDING SHELF**

If the appliance front panel is thicker than the cabinetry front panel, adjust the dividing shelf depth to ensure the oven sits flush with the front of the cabinetry.

**BLACK CLASHING**



Black clashing is recommended on front facing edges where products are located and on side cabinets if cabinet is rebated.

**OVEN CABINETRY TRIM**

If using light-colored cabinets, we recommend using black cabinetry trim to help hide the cabinetry beneath the front door panel of the appliance. Ensure the trim height does not interfere with any appliances or cabinetry below. Black cabinetry trim is included with ovens.

**LEVEL CABINETRY**


Check the shelves are level and the side panels are straight.

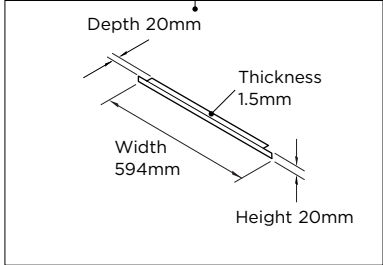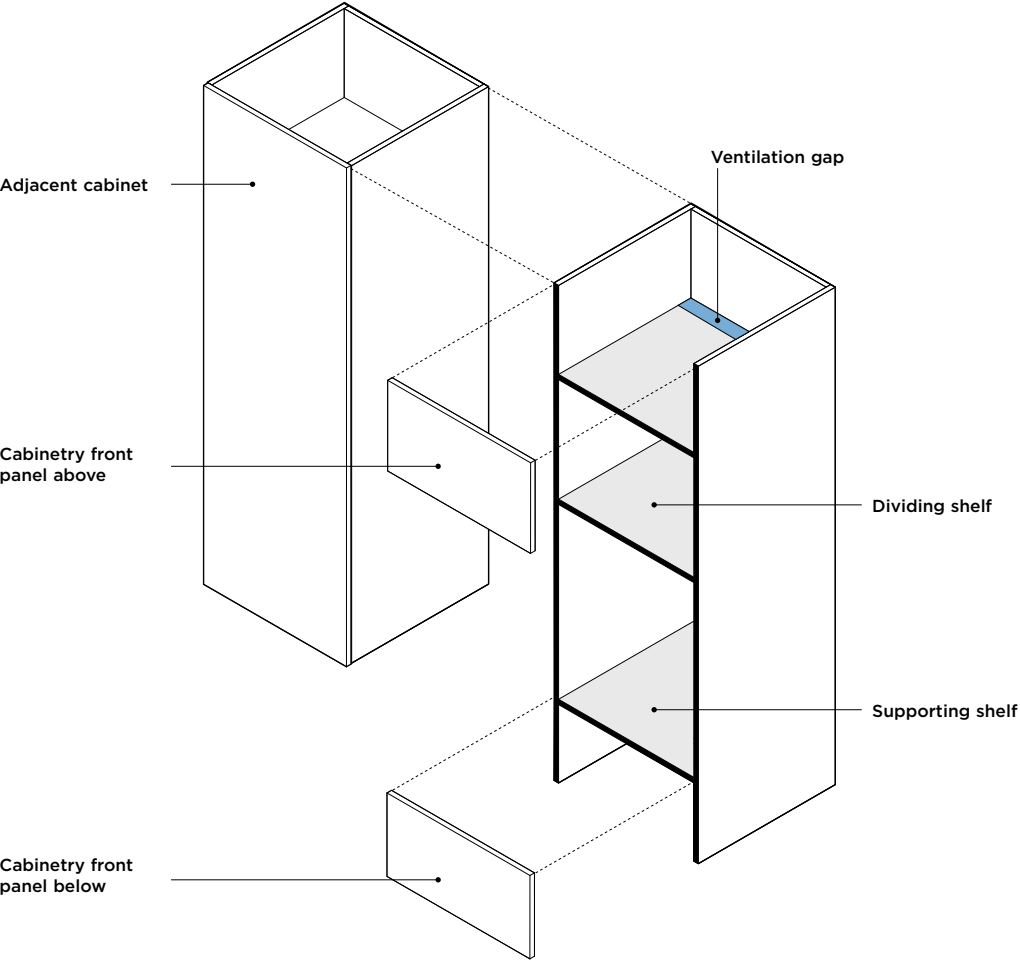

Combination Steam Oven or  
Combination Microwave Oven or  
Built-in Coffee Maker

Oven or Combination  
Steam Oven

Warming Drawer, Tall  
or Warming Drawer or  
Vacuum Seal Drawer

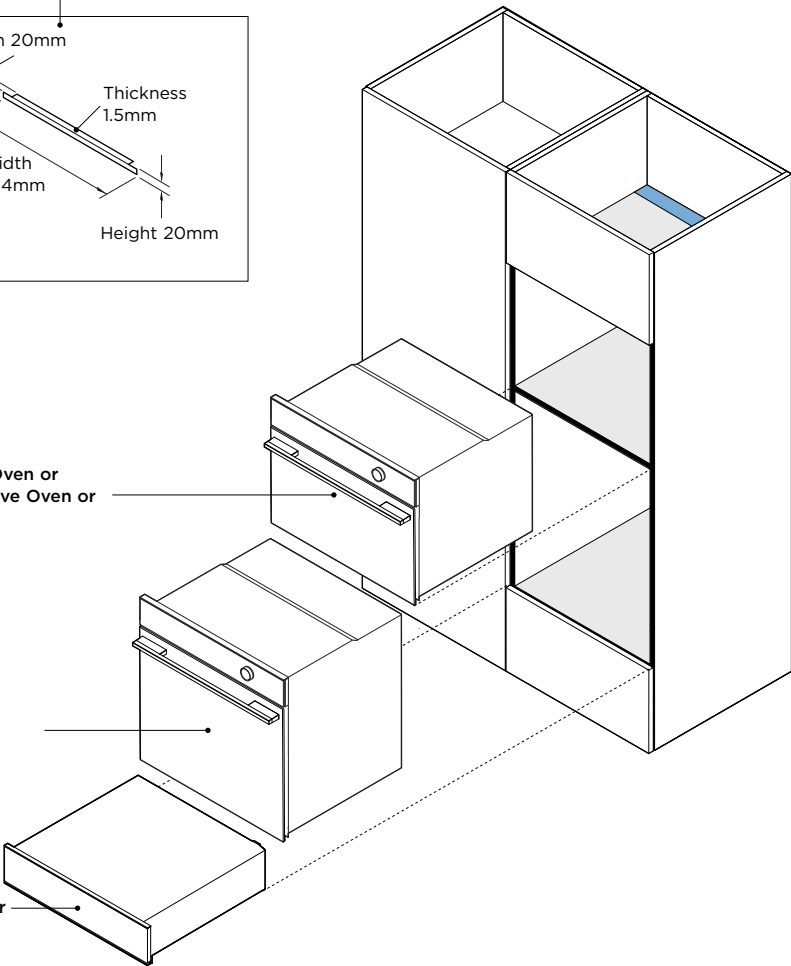

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)



Ventilation air vent is required at rear for some products.

Dividing shelves are required to support stacked appliances and to achieve correct clearance.

Dividing shelves must be constructed from material that will support the weight of the appliances.

Ensure the oven is not bearing any weight from cabinetry or products installed above.

Warming Drawers and Vacuum Seal Drawers can fully support a 60cm Fisher & Paykel oven, without adding a shelf in between.

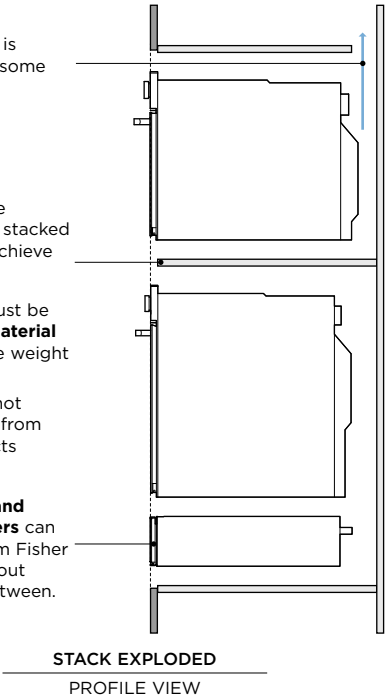

Minimum clearances above appliance control panel to upper appliance

STACK HEIGHT


(A) Overall product height

+


(B) Minimum clearances above appliance control panel or front panel to upper appliance

=

(C) Stacked Height

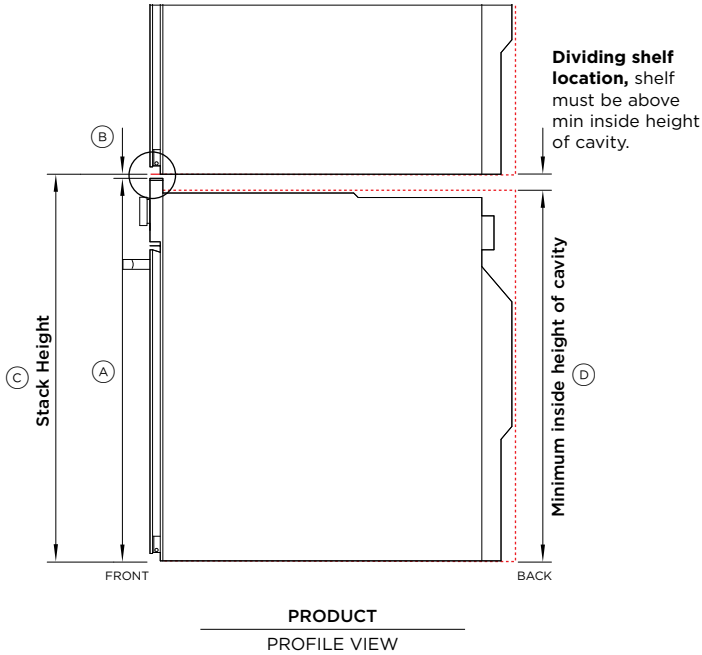

MINIMUM DIMENSION CLEARANCES

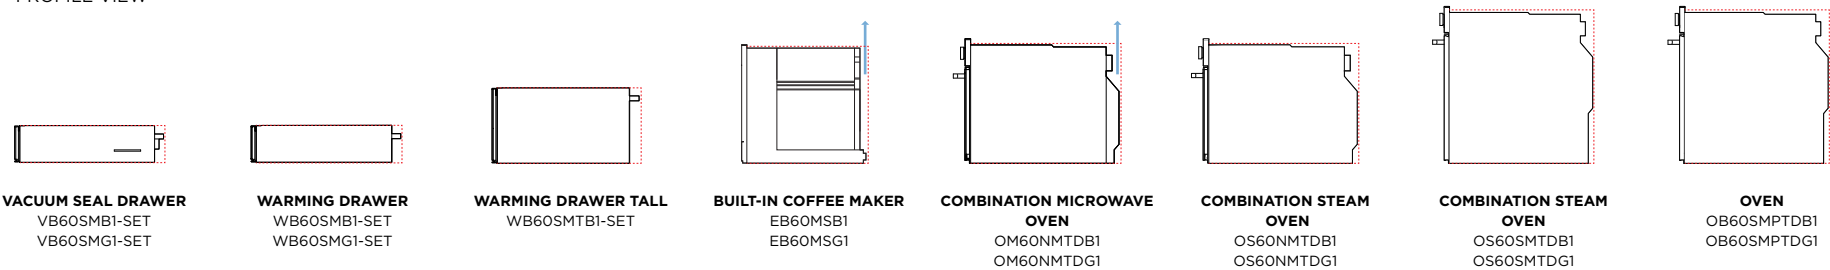


DIMENSIONS	VACUUM SEAL DRAWER VB60SMB1-SET VB60SMGI-SET	WARMING DRAWER WB60SMB1-SET WB60SMGI-SET	WARMING DRAWER TALL WB60SMTB1-SET	BUILT-IN COFFEE MAKER EB60MSB1 EB60MSG1	COMBINATION MICROWAVE OVEN OM60NMTDB1 OM60NMTDG1	COMBINATION STEAM OVEN OS60NMTDB1 OS60NMTDG1	COMBINATION STEAM OVEN OS60SMTDB1 OS60SMTDG1	OVEN OB60SMPTDB1 OB60SMPTDG1
(A) Overall product height	140mm	140mm	290mm	458mm***	458mm	458mm	598mm	598mm
(B) Minimum clearance above	-	-	-	2mm	2mm	2mm	2mm	2mm
(C) Stack height	140mm**	140mm**	290mm**	460mm*	460mm*	460mm*	600mm*	600mm*
(D) Minimum inside height of cavity	140mm	140mm	290mm	450mm	440mm	440mm	580mm	580mm

\*Stack Height is overall product height with minimum clearances above appliance control panel or front panel to upper appliance  
\*\*Warming Drawers and Vacuum Seal Drawers can fully support a 60cm Fisher & Paykel oven, without adding a shelf in between.  
\*\*\*Includes coffee maker rail height


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

COOKTOP CLEARANCE


If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.





CLEARANCE ABOVE  
PROFILE VIEW



CLEARANCE BOTTOM  
PROFILE VIEW



ADJACENT CABINET  
PLAN VIEW

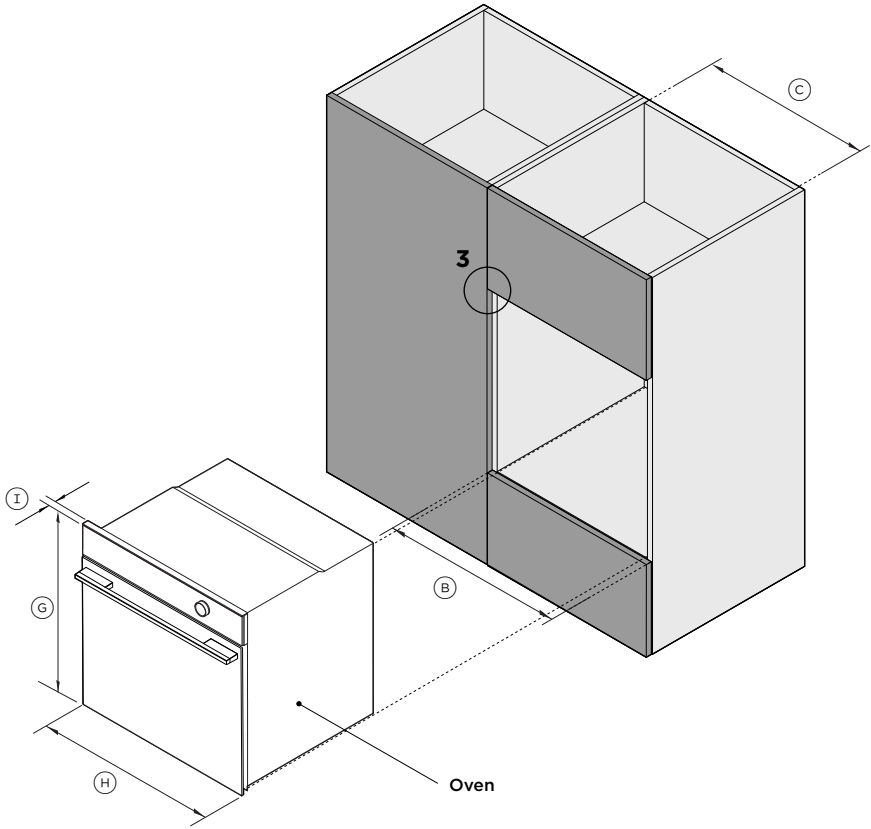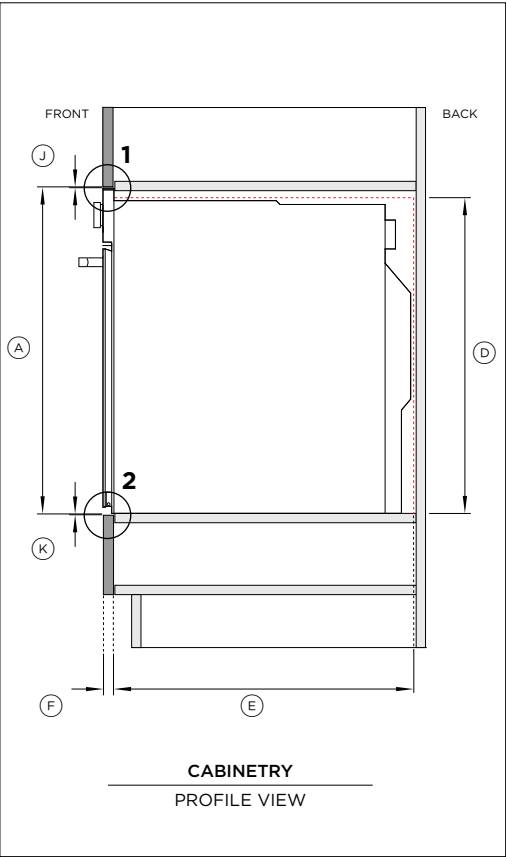


<b>Model no:</b> Oven - OB60SMPTDB1, OB60SMPTDG1	
<b>Cabinetry Dimensions - Flush</b>	<b>mm</b>
Ⓐ Overall cabinet height*	600
Ⓑ Overall cabinet width - single installation	600
Ⓒ Minimum inside width of cavity	560
Ⓓ Minimum inside height of cavity	580
Ⓔ Minimum inside depth of cavity	550
Ⓕ Thickness of cabinetry front panel**	16-20
*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel. **Cabinetry shown in drawings 19mm panels.	
Note: Consider placement of shelf above minimum inside height of cavity.	
<b>Product Dimensions</b>	<b>mm</b>
Ⓐ Overall height of product	598
Ⓑ Overall width of product	596
Ⓘ Thickness of oven front panel (excludes dial and handle)	20
<b>Cabinetry Clearances</b>	<b>mm</b>
Ⓙ Minimum clearances above oven control panel to upper cabinetry front panel	2
Ⓚ Minimum clearances between bottom of oven chassis to lower cabinetry front panel	2
Ⓛ Minimum clearance between adjacent front panel or appliance	2


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

COOKTOP CLEARANCE


If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.





CLEARANCE ABOVE  
PROFILE VIEW



CLEARANCE BOTTOM  
PROFILE VIEW



ADJACENT CABINET  
PLAN VIEW

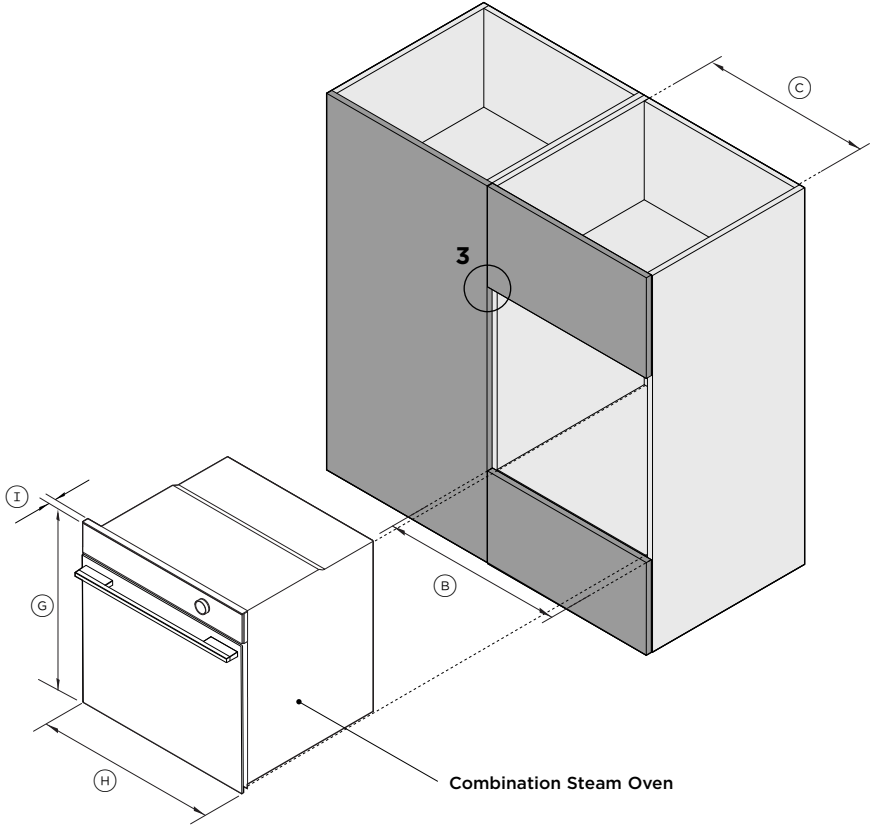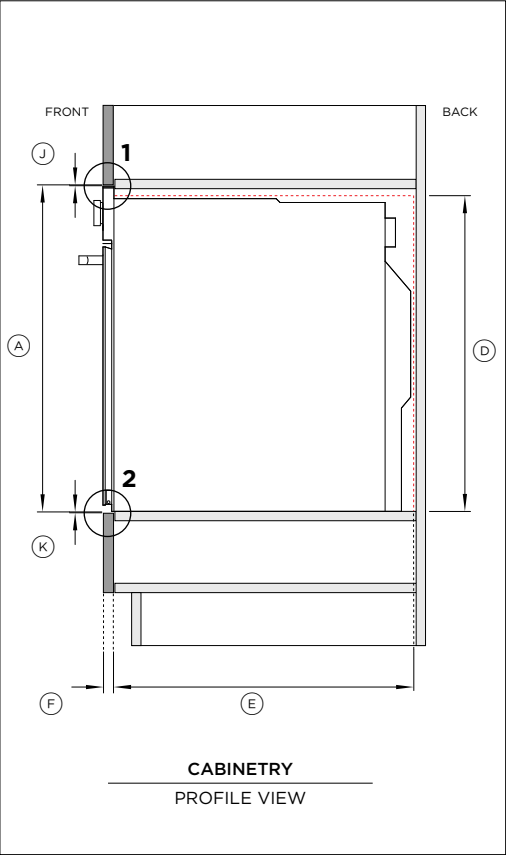


Model no: Combination Steam Oven - OS60SMTDB1, OS60SMTDG1	
Cabinetry Dimensions - Flush	mm
A Overall cabinet Height*	600
B Overall cabinet width - single installation	600
C Minimum inside width of cavity	560
D Minimum inside height of cavity	580
E Minimum inside depth of cavity	550
F Thickness of cabinetry front panel**	16-20
*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel.	
**Cabinetry shown in drawings 19mm panels.	
Note: Consider placement of shelf above minimum inside height of cavity.	
Product Dimensions	mm
G Overall height of product	598
H Overall width of product	596
I Thickness of oven front panel (excludes dial and handle)	20
Cabinetry Clearances	mm
J Minimum clearances above oven control panel to upper cabinetry front panel	2
K Minimum clearances between bottom of oven chassis to lower cabinetry front panel	2
L Minimum clearance between adjacent front panel or appliance	2


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

COOKTOP CLEARANCE


If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




CLEARANCE ABOVE  
PROFILE VIEW




CLEARANCE BOTTOM  
PROFILE VIEW



ADJACENT CABINET  
PLAN VIEW

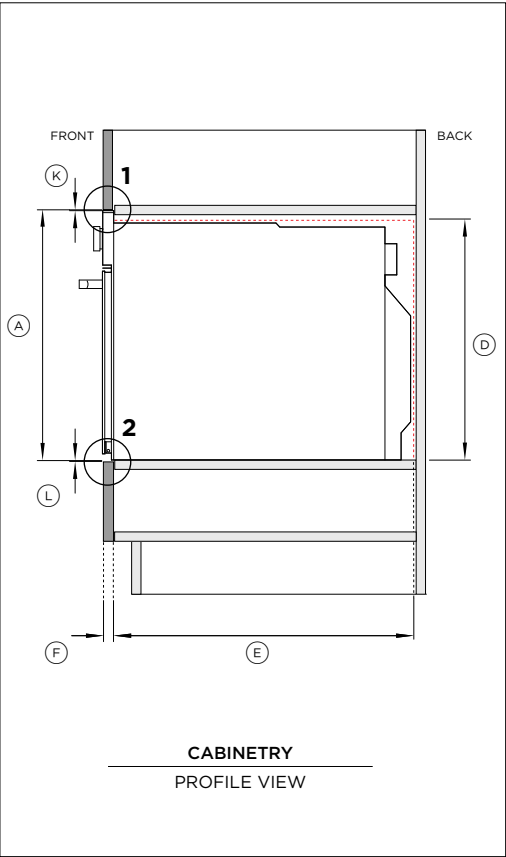

CABINETRY  
PROFILE VIEW

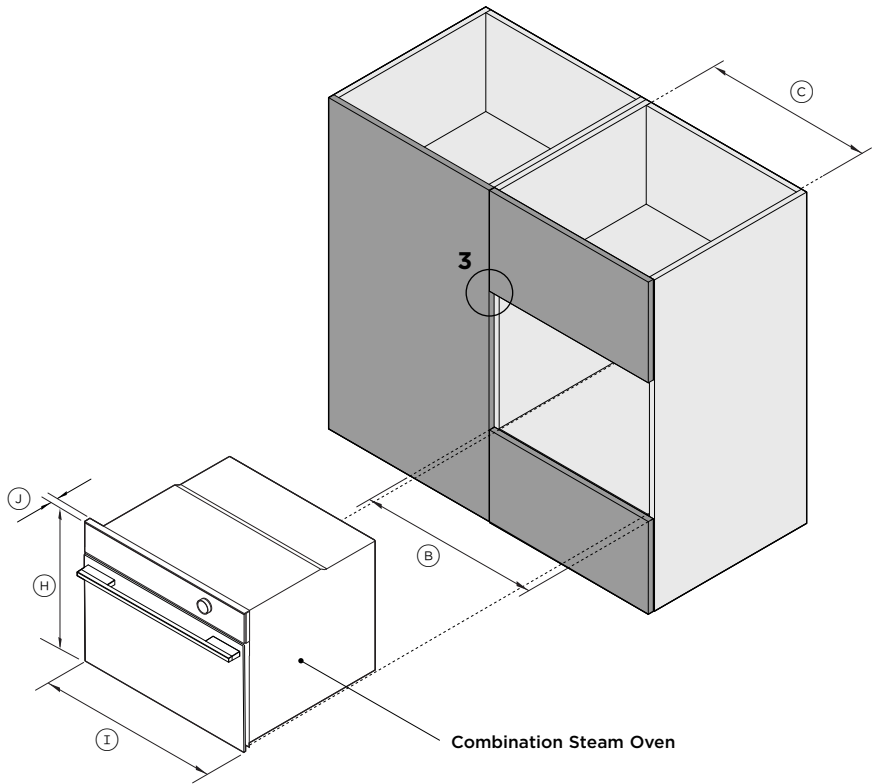

Combination Steam Oven


Model no: Combination Steam Oven - OS60NMTDB1, OS60NMTDG1	
Cabinetry Dimensions - Flush	mm
A Overall cabinet height*	460
B Overall cabinet width - single installation	600
C Minimum inside width of cavity	560
D Minimum inside height of cavity	440
E Minimum inside depth of cavity	550
F Thickness of cabinetry front panel**	16-20
*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel.	
**Cabinetry shown in drawings 19mm panels.	
Note: Consider placement of shelf above minimum inside height of cavity.	
Product Dimensions	mm
G Overall height of product	458
H Overall width of product	596
I Thickness of oven front panel (excludes dial and handle)	20
Cabinetry Clearances	mm
J Minimum clearances above oven control panel to upper cabinetry front panel	2
K Minimum clearances between bottom of oven chassis to lower cabinetry front panel	2
L Minimum clearance between adjacent front panel or appliance	2

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)




VENTILATION


Ventilation of 50mm x 560mm or totalling 280cm2 is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, top, sides, or back.





CLEARANCE ABOVE  
PROFILE VIEW



CLEARANCE BOTTOM  
PROFILE VIEW



ADJACENT CABINET  
PLAN VIEW

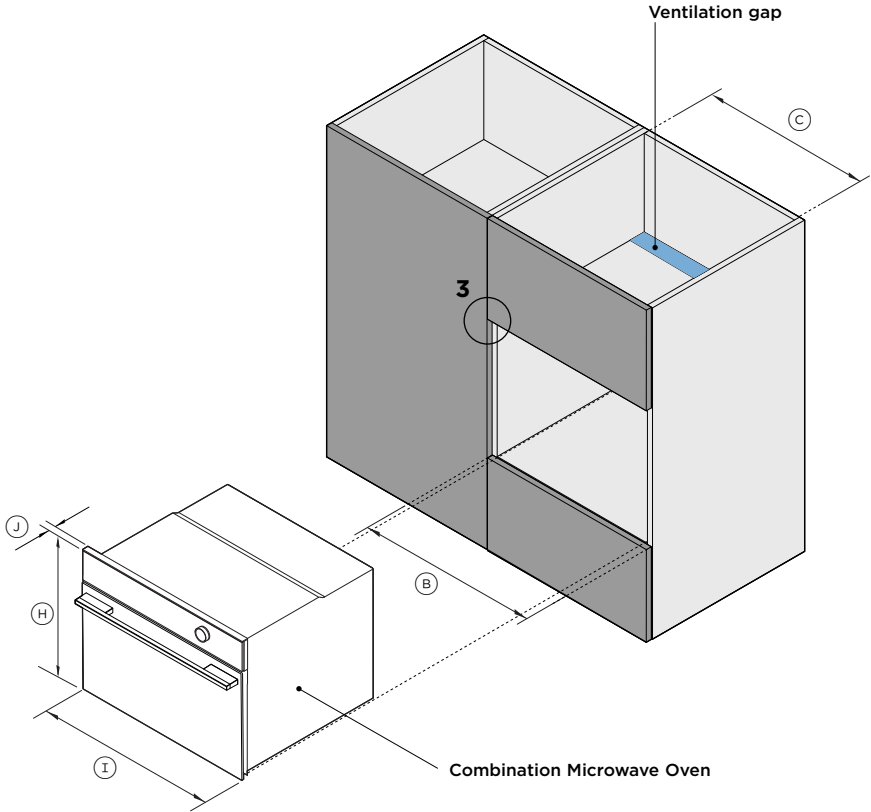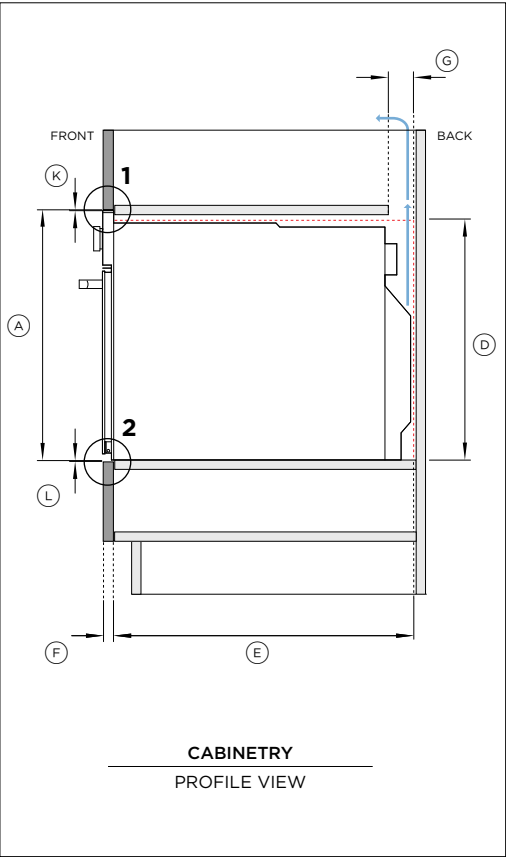

Model no:  
Combination Microwave Oven - OM60NMTDB1, OM60NMTDG1

Cabinetry Dimensions - Flush	mm
A Overall cabinet height*	460
B Overall cabinet width - single installation	600
C Minimum inside width of cavity**	560
D Minimum inside height of cavity	440
E Minimum inside depth of cavity	550
F Thickness of cabinetry front panel**	16-20
G Ventilation gap***	50

\*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel.  
\*\*Cabinetry shown in drawings 19mm panels.  
\*\*\*A rear ventilation air vent totalling 280cm2 is required. The air vent must be located at the rear of the cabinet, it can be positioned at the base, sides, back or top of the cavity.

Note: Consider placement of shelf above minimum inside height of cavity.


Product Dimensions	mm
H Overall height of product	458
I Overall width of product	596
J Thickness of oven front panel (excludes dial and handle)	20

Cabinetry Clearances	mm
K Minimum clearances above oven control panel to upper cabinetry front panel	2
L Minimum clearances between bottom of oven chassis to lower cabinetry front panel	2
M Minimum clearance between adjacent front panel or appliance	2


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://www.fisherpaykel.com)

**VENTILATION**


Ventilation of 50mm x 560mm or totalling 280cm2 is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, top, sides, or back.




**CLEARANCE ABOVE**  
PROFILE VIEW




**CLEARANCE BOTTOM**  
PROFILE VIEW



**ADJACENT CABINET**  
PLAN VIEW

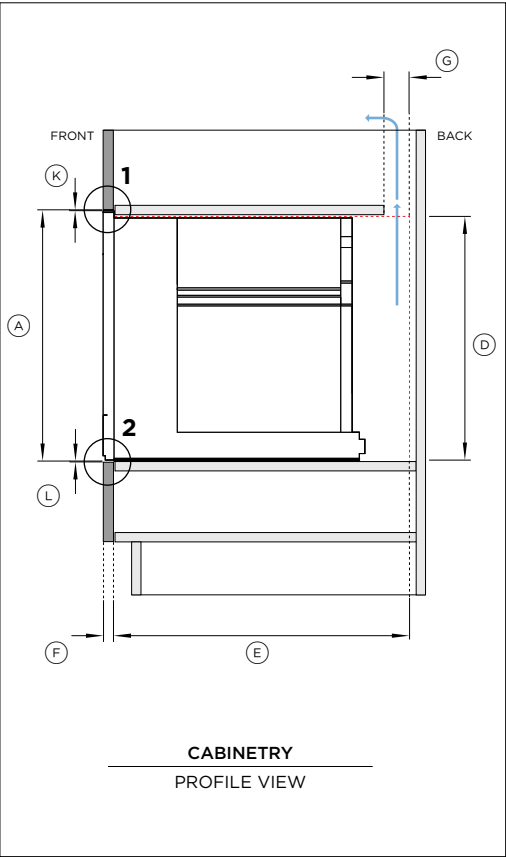

**CABINETRY**  
PROFILE VIEW

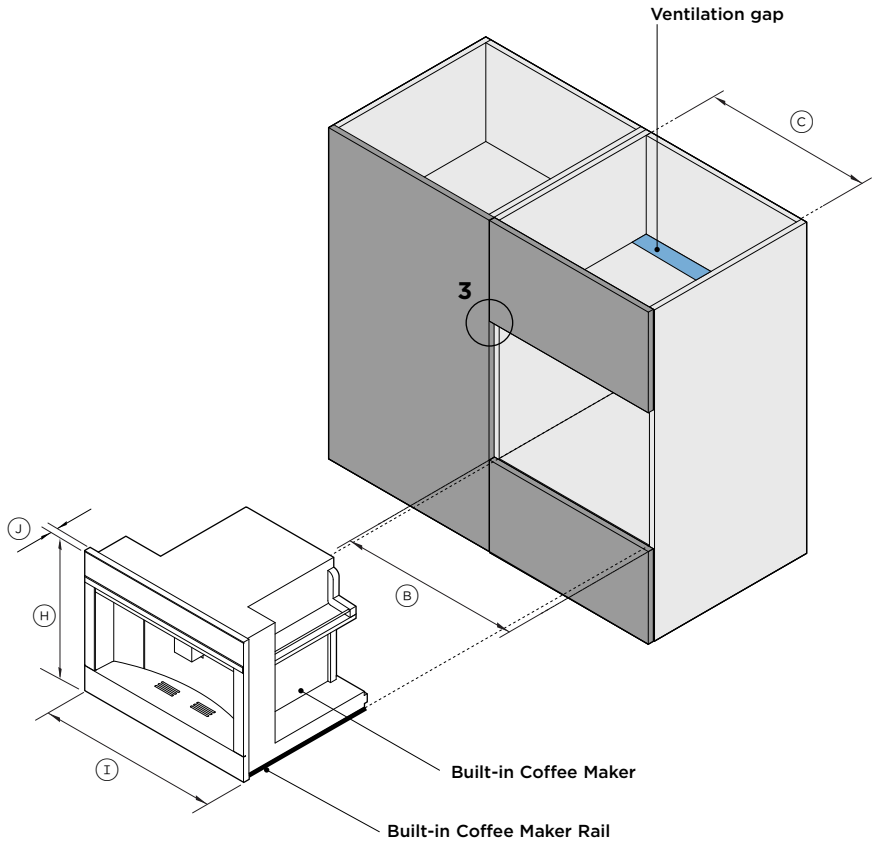

**Built-in Coffee Maker**

**Built-in Coffee Maker Rail**

**Model no:**

Built-in Coffee Maker - EB60MSB1, EB60MSG1

Cabinetry Dimensions - Flush	mm
A Overall cabinet height*	460
B Overall cabinet width - single installation	600
C Minimum inside width of cavity**	560
D Minimum inside height of cavity	450
E Minimum inside depth of cavity	545
F Thickness of cabinetry front panel**	16-20
G Ventilation gap***	50

\*Overall cabinet height is overall product height with minimum clearance above coffee maker control panel to upper cabinetry front panel  
\*\*Cabinetry shown in drawings 19mm panels.  
\*\*\*A rear ventilation air vent totalling 280cm2 is required. The air vent must be located at the rear of the cabinet, it can be positioned at the base, sides, back or top of the cavity.

Note: Consider placement of shelf above minimum inside height of cavity.


Product Dimensions	mm
H Overall height of product	458
I Overall width of product	596
J Thickness of coffee maker control panel	20

Cabinetry Clearances	mm
K Minimum clearances above coffee maker control panel to upper cabinetry front panel	2
L Minimum clearances between bottom of coffee maker rails to lower cabinetry front panel	2
M Minimum clearance between adjacent front panel or appliance	2


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

NOTE


The Warming Drawer can fully support a 60cm Fisher & Paykel oven, without adding a shelf in between.





CLEARANCE ABOVE  
PROFILE VIEW



CLEARANCE BOTTOM  
PROFILE VIEW



ADJACENT CABINET  
PLAN VIEW

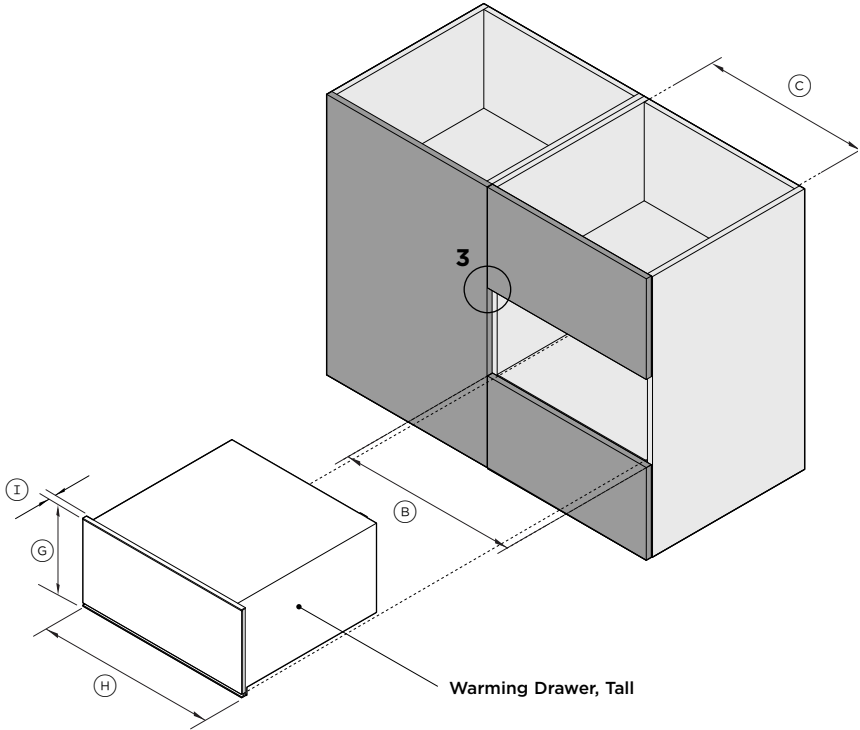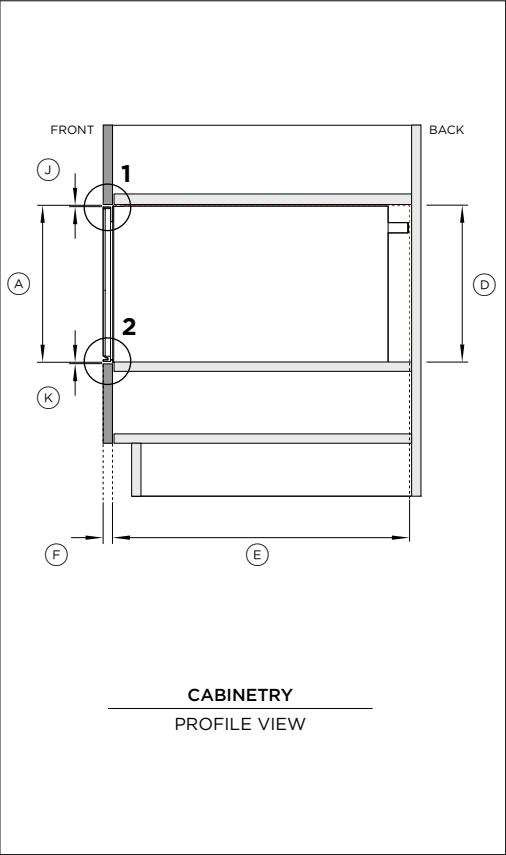

Model no:

Warming Drawer, Tall - WB60SMTB1-SET

Cabinetry Dimensions - Flush	mm
A Overall cabinet height*	294
B Overall cabinet width	600
C Minimum inside width of cavity	560
D Minimum inside height of cavity	292
E Minimum inside depth of cavity	550
F Thickness of cabinetry front panel**	16-20

\*Overall cabinet height is overall product height with minimum clearance above drawer front panel to upper cabinetry front panel.  
\*\*Cabinetry shown in drawings 19mm panels.

Note: Consider placement of shelf above minimum inside height of cavity.

Product Dimensions	mm
G Overall height of product	290
H Overall width of product	596
I Thickness of warming drawer front panel and flange	20


Cabinetry Clearances	mm
J Minimum clearances above drawer front panel to upper cabinetry front panel*	4
K Minimum clearances between bottom of drawer chassis to lower cabinetry front panel	2
L Minimum clearance between adjacent front panel or appliance	2

\*Achieve a smaller gap between drawer front panel to upper cabinetry front panel by dropping cabinetry front panel down


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

**NOTE**


The Warming Drawer can fully support a 60cm Fisher & Paykel oven, without adding a shelf in between.




**CLEARANCE ABOVE**  
PROFILE VIEW




**CLEARANCE BOTTOM**  
PROFILE VIEW



**ADJACENT CABINET**  
PLAN VIEW

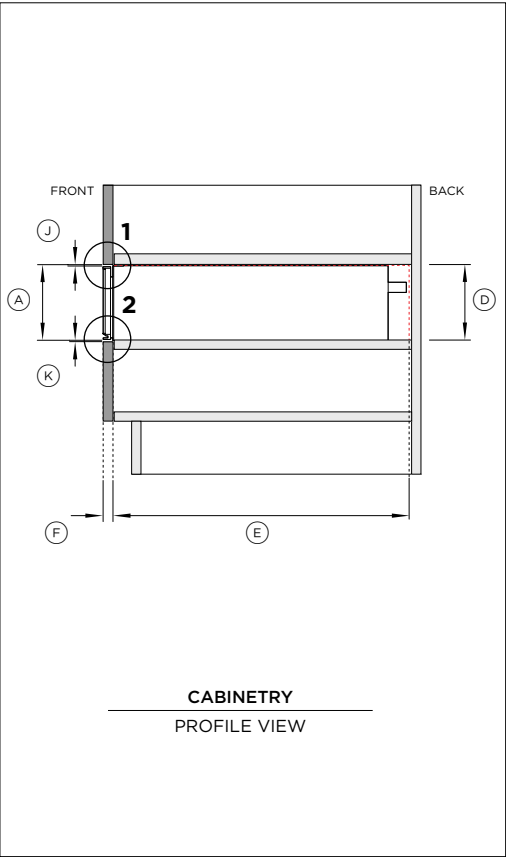

**CABINETRY**  
PROFILE VIEW

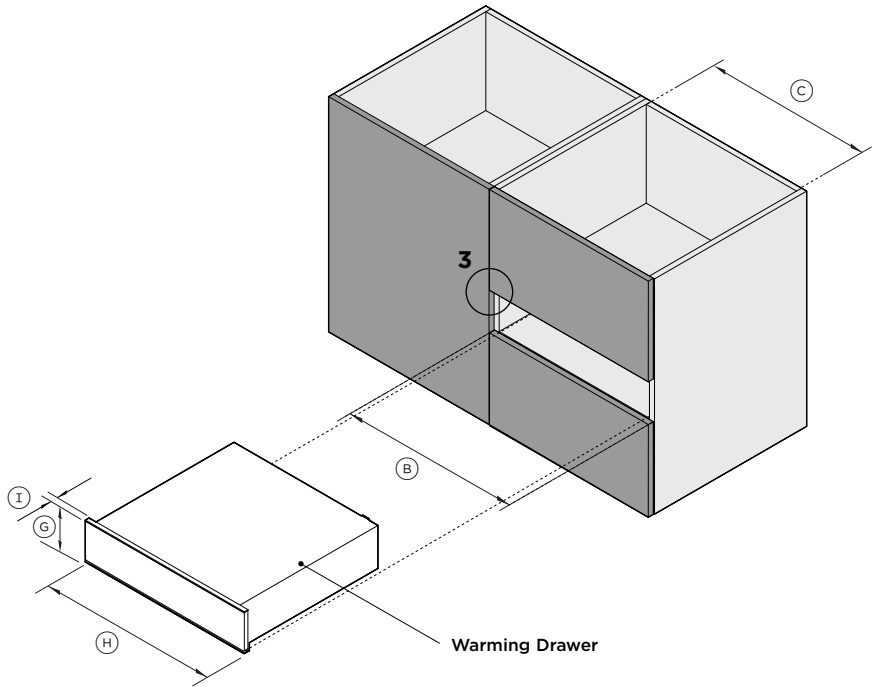

<b>Model no:</b> Warming Drawer - WB60SMB1-SET, WB60SMG1-SET	
<b>Cabinetry Dimensions - Flush</b>	<b>mm</b>
Ⓐ Overall cabinet height*	144
Ⓑ Overall cabinet width - single installation	600
Ⓒ Minimum inside width of cavity	560
Ⓓ Minimum inside height of cavity	142
Ⓔ Minimum inside depth of cavity	550
Ⓕ Thickness of cabinetry front panel**	16-20

\*Overall cabinet height is overall product height with minimum clearance above drawer front panel to upper cabinetry front panel.  
\*\*Cabinetry shown in drawings 19mm panels.

Note: Consider placement of shelf above minimum inside height of cavity.

<b>Product Dimensions</b>	<b>mm</b>
Ⓖ Overall height of product	140
Ⓗ Overall width of product	596
Ⓘ Thickness of warming drawer front panel and flange	20


<b>Cabinetry Clearances</b>	<b>mm</b>
Ⓙ Minimum clearances above drawer front panel to upper cabinetry front panel*	4
Ⓚ Minimum clearances between bottom of drawer chassis to lower cabinetry front panel	2
Ⓛ Minimum clearance between adjacent front panel or appliance	2

\*Achieve a smaller gap between drawer front panel to upper cabinetry front panel by dropping cabinetry front panel down


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

**NOTE**


The Vacuum Seal Drawer can fully support a 60cm Fisher & Paykel oven, without adding a shelf in between.





**CLEARANCE ABOVE**  
PROFILE VIEW



**CLEARANCE BOTTOM**  
PROFILE VIEW



**ADJACENT CABINET**  
PLAN VIEW

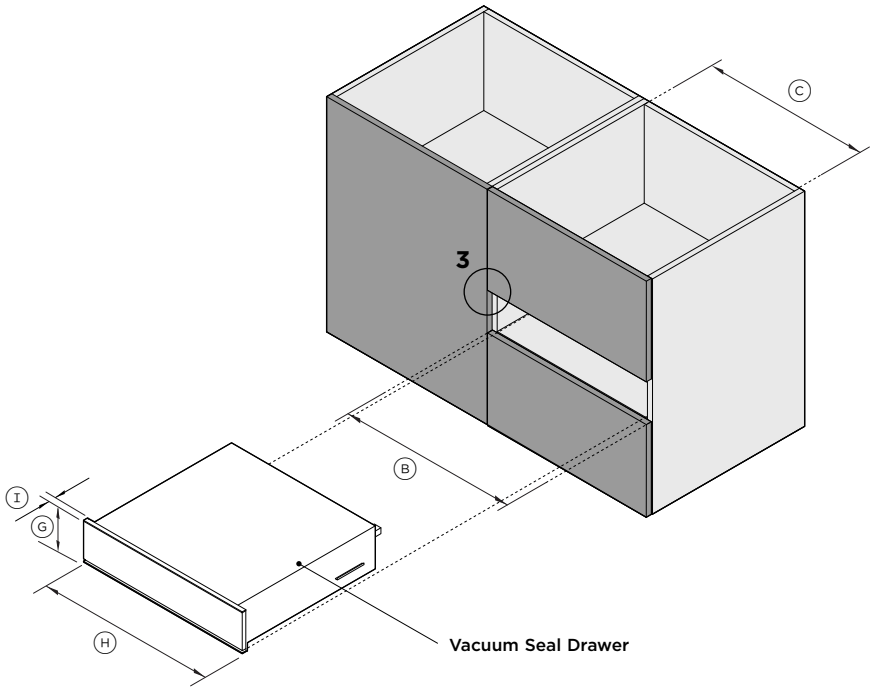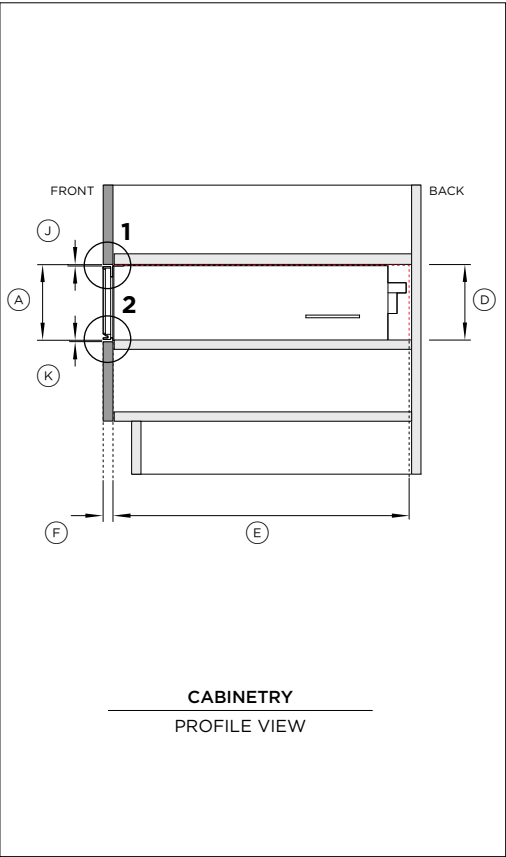



<b>Model no:</b> Vacuum Seal Drawer - VB60SMB1-SET, VB60SMG1-SET	
<b>Cabinetry Dimensions - Flush</b>	<b>mm</b>
Ⓐ Overall cabinet height*	144
Ⓑ Overall cabinet width - single installation	600
Ⓒ Minimum inside width of cavity	560
Ⓓ Minimum inside height of cavity	142
Ⓔ Minimum inside depth of cavity	550
Ⓕ Thickness of cabinetry front panel**	16-20
*Overall cabinet height is overall product height with minimum clearance above drawer front panel to upper cabinetry front panel.	
**Cabinetry shown in drawings 19mm panels.	
Note: Consider placement of shelf above minimum inside height of cavity.	
<b>Product Dimensions</b>	<b>mm</b>
Ⓖ Overall height of product	140
Ⓗ Overall width of product	596
Ⓘ Thickness of vacuum seal drawer front panel and flange	20
<b>Cabinetry Clearances</b>	<b>mm</b>
Ⓙ Minimum clearances above drawer front panel to upper cabinetry front panel*	4
Ⓚ Minimum clearances between bottom of drawer chassis to lower cabinetry front panel	2
Ⓛ Minimum clearance between adjacent front panel or appliance	2
*Achieve a smaller gap between drawer front panel to upper cabinetry front panel by dropping cabinetry front panel down	

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

## SERVICES




CONNECTION

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

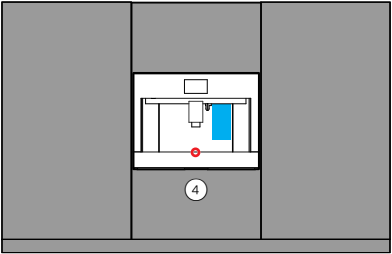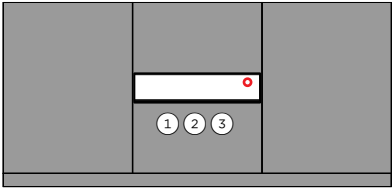

BUILT-IN COFFEE MAKER

The power cable must be long enough to allow the appliance to be extracted from the cabinet to fill the coffee bean container. Fix the power cable with the clip.

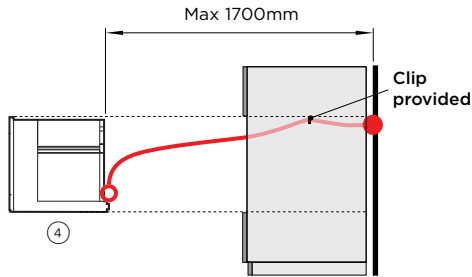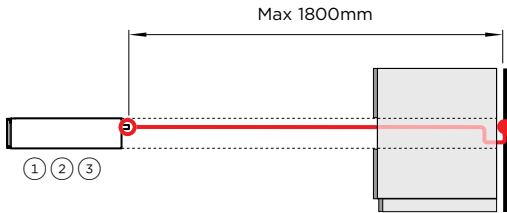

① VACUUM SEAL DRAWER  
VB60SMB1-SET  
VB60SMG1-SET

② WARMING DRAWER  
WB60SMB1-SET  
WB60SMG1-SET








③ WARMING DRAWER TALL  
WB60SMTB1-SET

④ BUILT-IN COFFEE MAKER  
EB60MSB1  
EB60MSG1

POWER CORD				
Maximum power cord length*	1800mm	1800mm	1800mm	1700mm
Location	Upper right	Upper right	Upper right	Lower centered
Connection	Flex cord	Flex cord	Flex cord	Flex cord
*Measured from power outlet				
WATER				
Total Capacity	-	-	-	2.4L
Location	-	-	-	Water tank (internal)
ELECTRICAL				
Supply	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz
Service	10 A	10 A	10 A	20 A

Note: Multiple product installation requires the design of power outlets according to local regulations.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

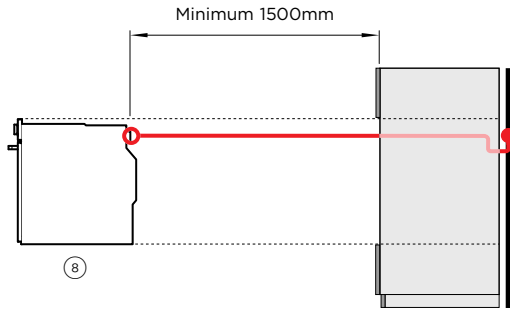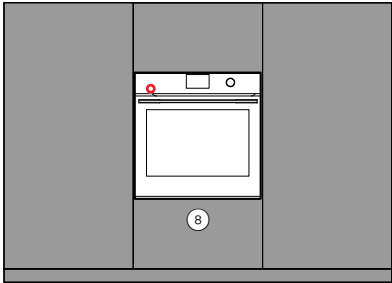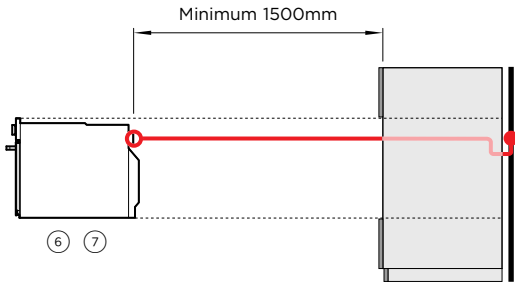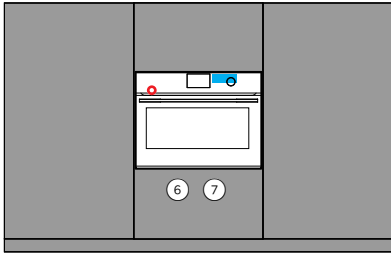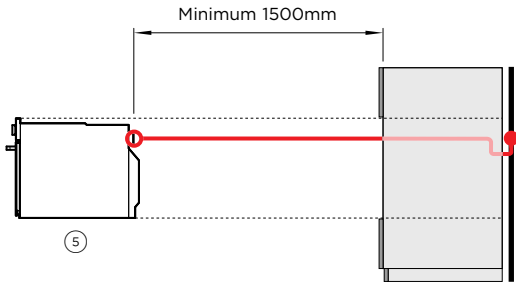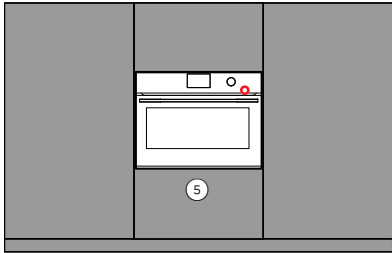

5 COMBINATION MICROWAVE OVEN  
OM60NMTDB1  
OM60NMTDG1

6 COMBINATION STEAM OVEN  
OS60NMTDB1  
OS60NMTDG1

7 COMBINATION STEAMOVEN  
OS60SMTDB1  
OS60SMTDG1

8 OVEN  
OB60SMPTDB1  
OB60SMPTDG1

POWER CORD				
Power cord free length	Minimum 1500mm*	Minimum 1500mm*	Minimum 1500mm*	Minimum 1500mm*
Location	Upper right	Upper left	Upper left	Upper left
Connection	Hard wire**	Hard wire**	Hard wire**	Hard wire**
*The electrician provides sufficient free length of power supply cable to reach from the bottom rear of the cavity to at least 1.5m in front of the bottom edge of the opening				
**For more information, refer to the Installation Guide. Ensure power will remain accessible following install to allow access for any future product maintenance.				
WATER				
Total Capacity	-	1.4L	1.4L	-
Location	-	Water tank (internal)	Water tank (internal)	-
ELECTRICAL				
Supply	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz
Service	20 A	20 A	20 A	20 A

Note: Multiple product installation requires the design of power outlets according to local regulations.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)



